

The Regency Collection with Estates Chimney & Fireplace



**ESTATES CHIMNEY
& FIREPLACE, LLC**

117 Buck Rd, Holland, PA 18966, USA

(267) 685-0530 info@estatesfireplace.com

www.estatesfireplace.com

REGENCY®

CITY SERIES

MODERN DESIGNER FIREPLACES WITH NO LIMITATIONS



regency-fire.com





modern fireplaces with no limitations

The Regency City Series of modern gas fireplaces offer unmatched design flexibility, quality, and contemporary styling. These stunning fireplaces create a unique focal point in your home and provide the calming ambiance of a large fire with just the push of a button.


Learn more here:








multiple configurations available




NEW YORK VIEW
Single Sided

A simple yet elegant statement that ties your living space together and elevates any wall with its seamless, linear look.




CHICAGO CORNER
Corner Left or Right

Provides design freedom due to its ability to act as a show stopping standalone or a flattering accent in any area.




SAN FRANCISCO BAY
Three Sided

Creates a focal point that sparks conversations and creates a comforting ambiance in your home.



SANTA MONICA PIER
Pier Left or Right

Allows you to enjoy dynamic views from all angles in your living space as you lounge in the warmth of vivid flames.



SEATTLE SEE-THROUGH
See-Through

Versatile architectural element allows you to enjoy a clear, frameless view of the fire from two rooms.





unlimited finishes - no limits. no restrictions.

Designed to maintain a cool wall to accommodate custom finishes right to the edge of your fireplace. Complete your fireplace look with:

- Wood
- Marble
- Glass
- Metal
- Tile
- Fabric
- Wallpaper
- Textured Panel
- Embossed Panel
- Faux Stone




- 3D Wall Panel



- Herringbone Wood Panel



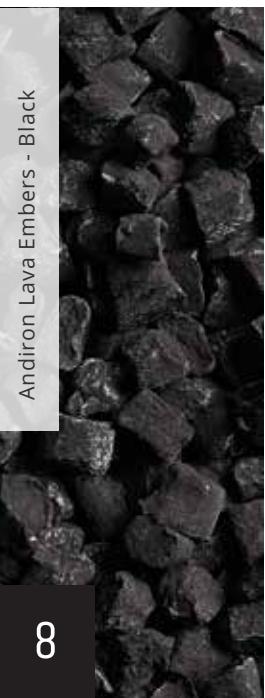


Crushed Glass - Black Coal



Crushed Glass - Ginger



Crushed Glass - Iceberg

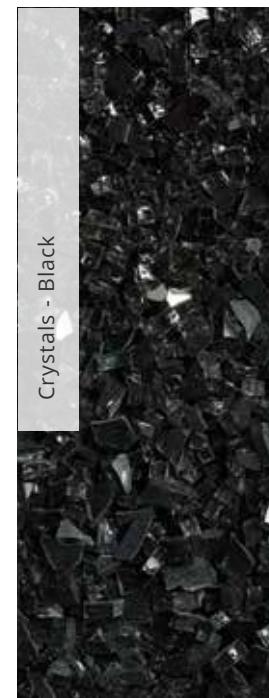

Crystals - Black



Crystals - Copper

choose your look

Integrated accessories with warm realistic firebed. Relaxed, natural flames rise from a richly detailed bed of logs, stones, crystals, or crushed glass media options.



Driftwood Log Set



Birch Log Set



Split Oak Log Set



Volcanic Stones - Tan or Grey

INTERIOR FIREBOX PANELS



Black Steel Interior Panels



Black Enamel Inner Reflective Panels




Black Glass Inner Reflective Panels

40


available as:



NEW YORK VIEW
Single Sided



CHICAGO CORNER
Corner Left or Right




SAN FRANCISCO BAY
Three Sided





San Francisco Bay 40 shown with black reflective crystals, birch log set and black glass inner reflective panels.

seamlessly integrates
into any interior

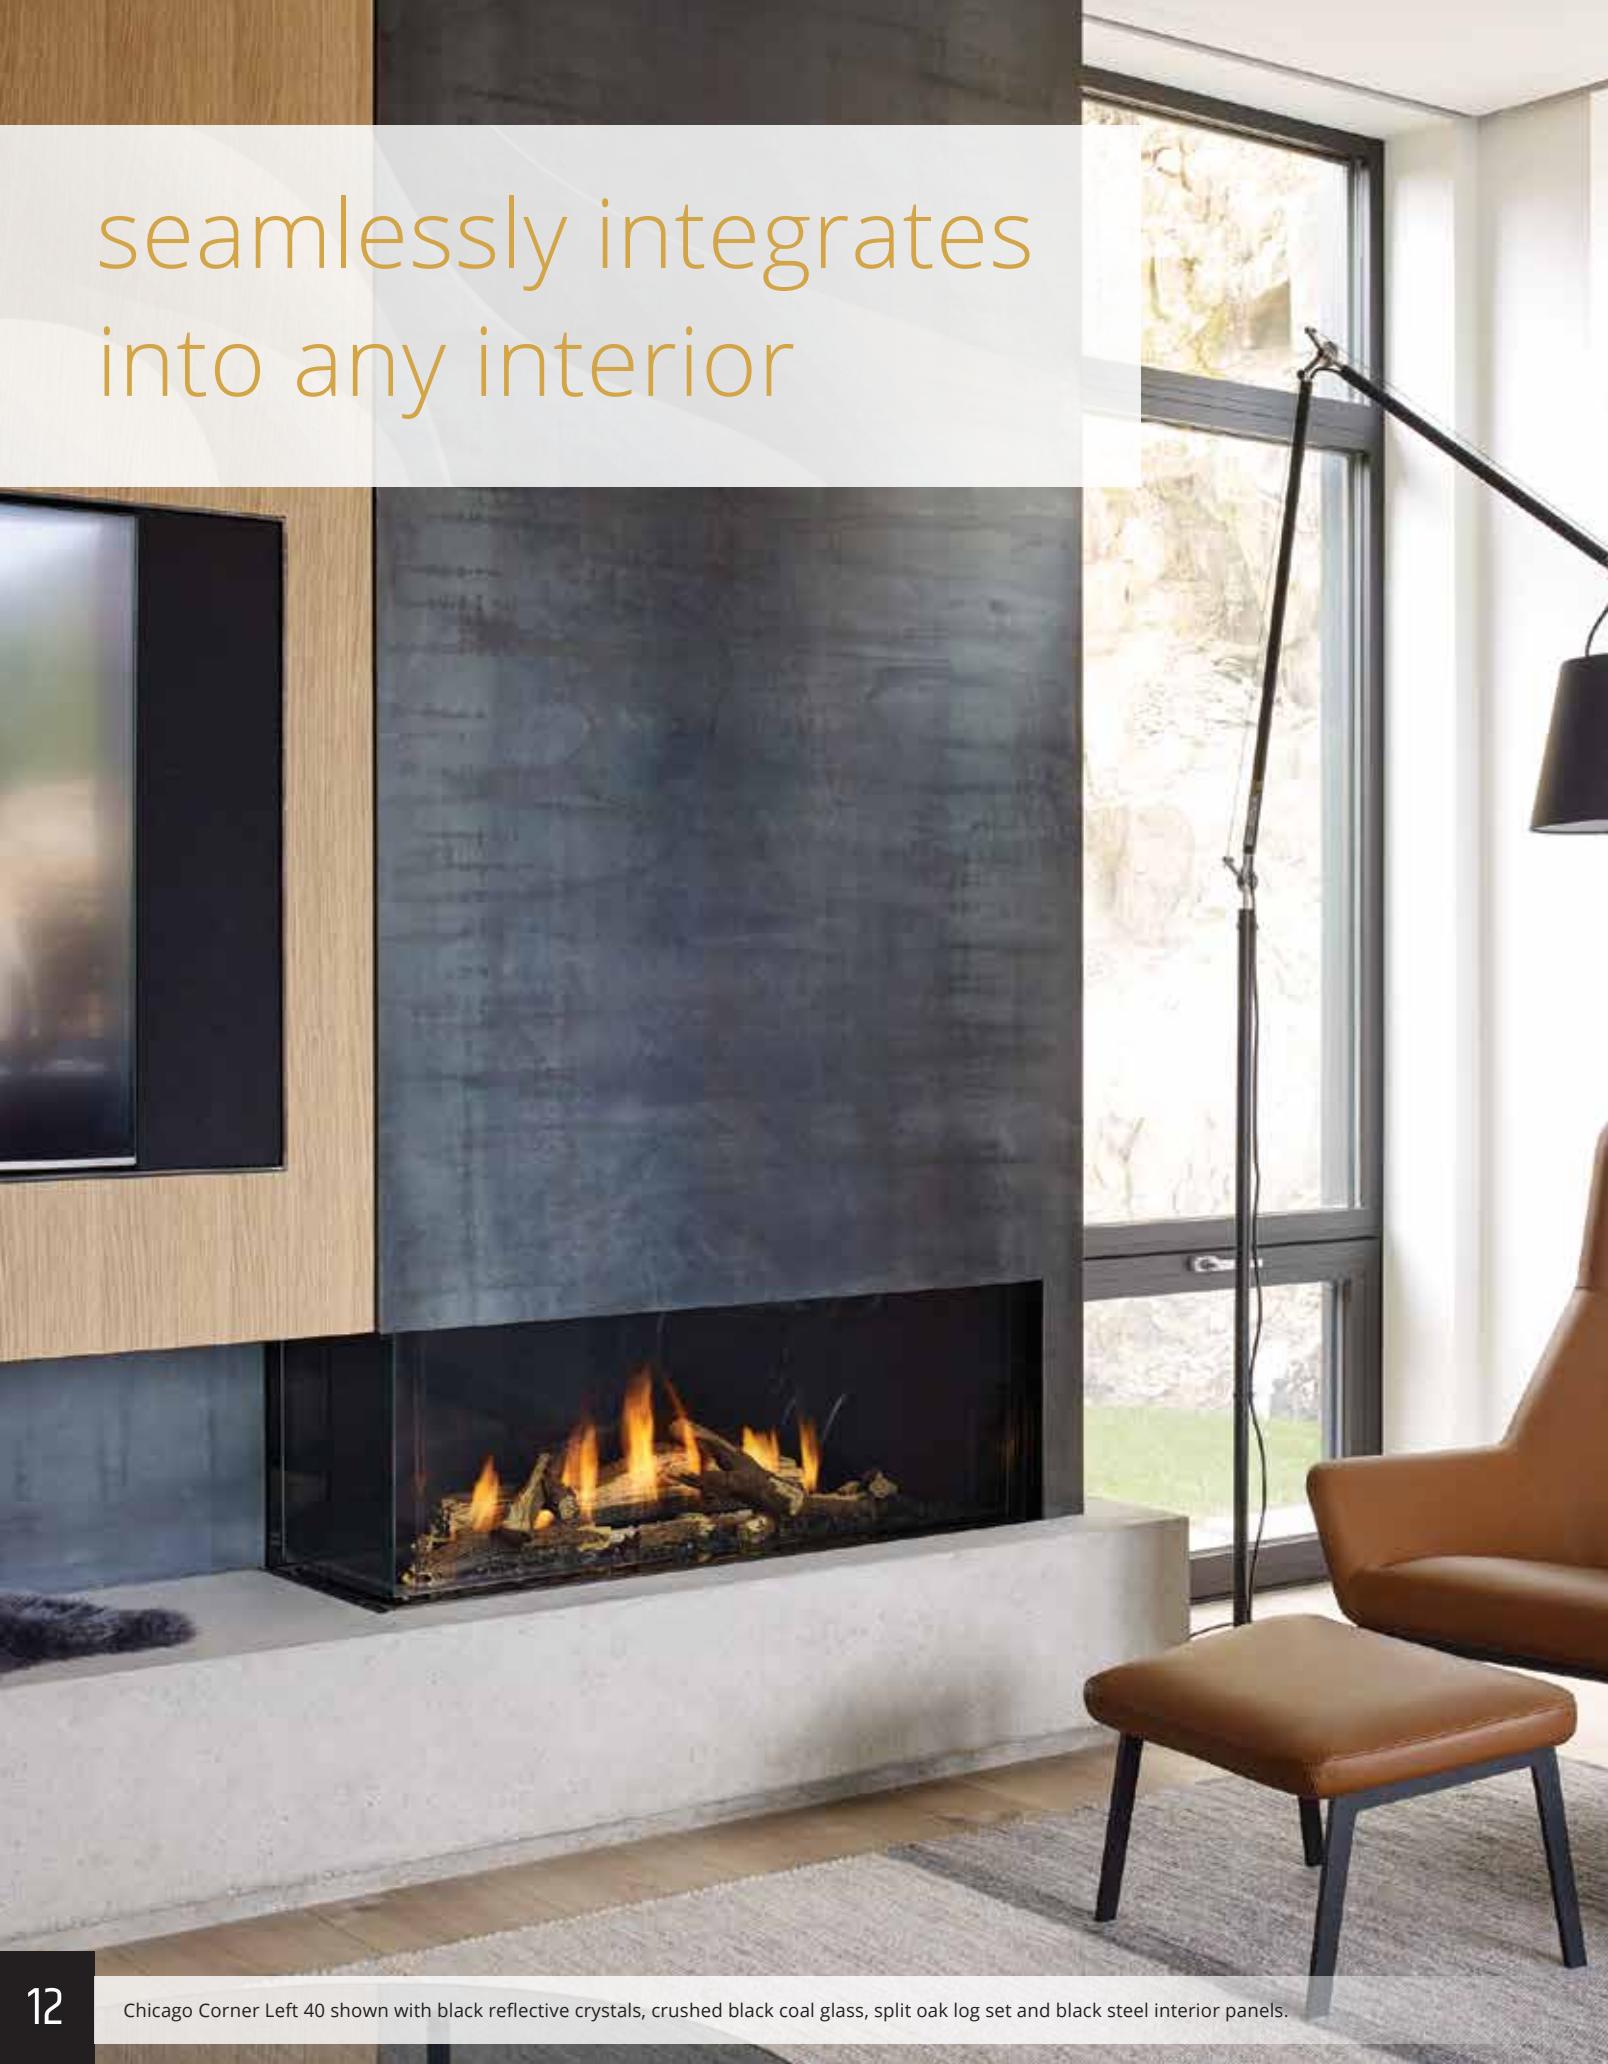




San Francisco Bay 40 shown with black reflective crystals, driftwood log set, black glass inner reflective panels.

50


available as:




NEW YORK VIEW
Single Sided



CHICAGO CORNER
Corner Left or Right



SAN FRANCISCO BAY
Three Sided



SANTA MONICA PIER
Pier Left or Right

COMING SOON




SEATTLE SEE-THROUGH
See-Through





Chicago Corner Left 50 shown with black reflective crystals, volcanic stones in tan and black steel interior panels.

use any finish right
to the edge of the fire

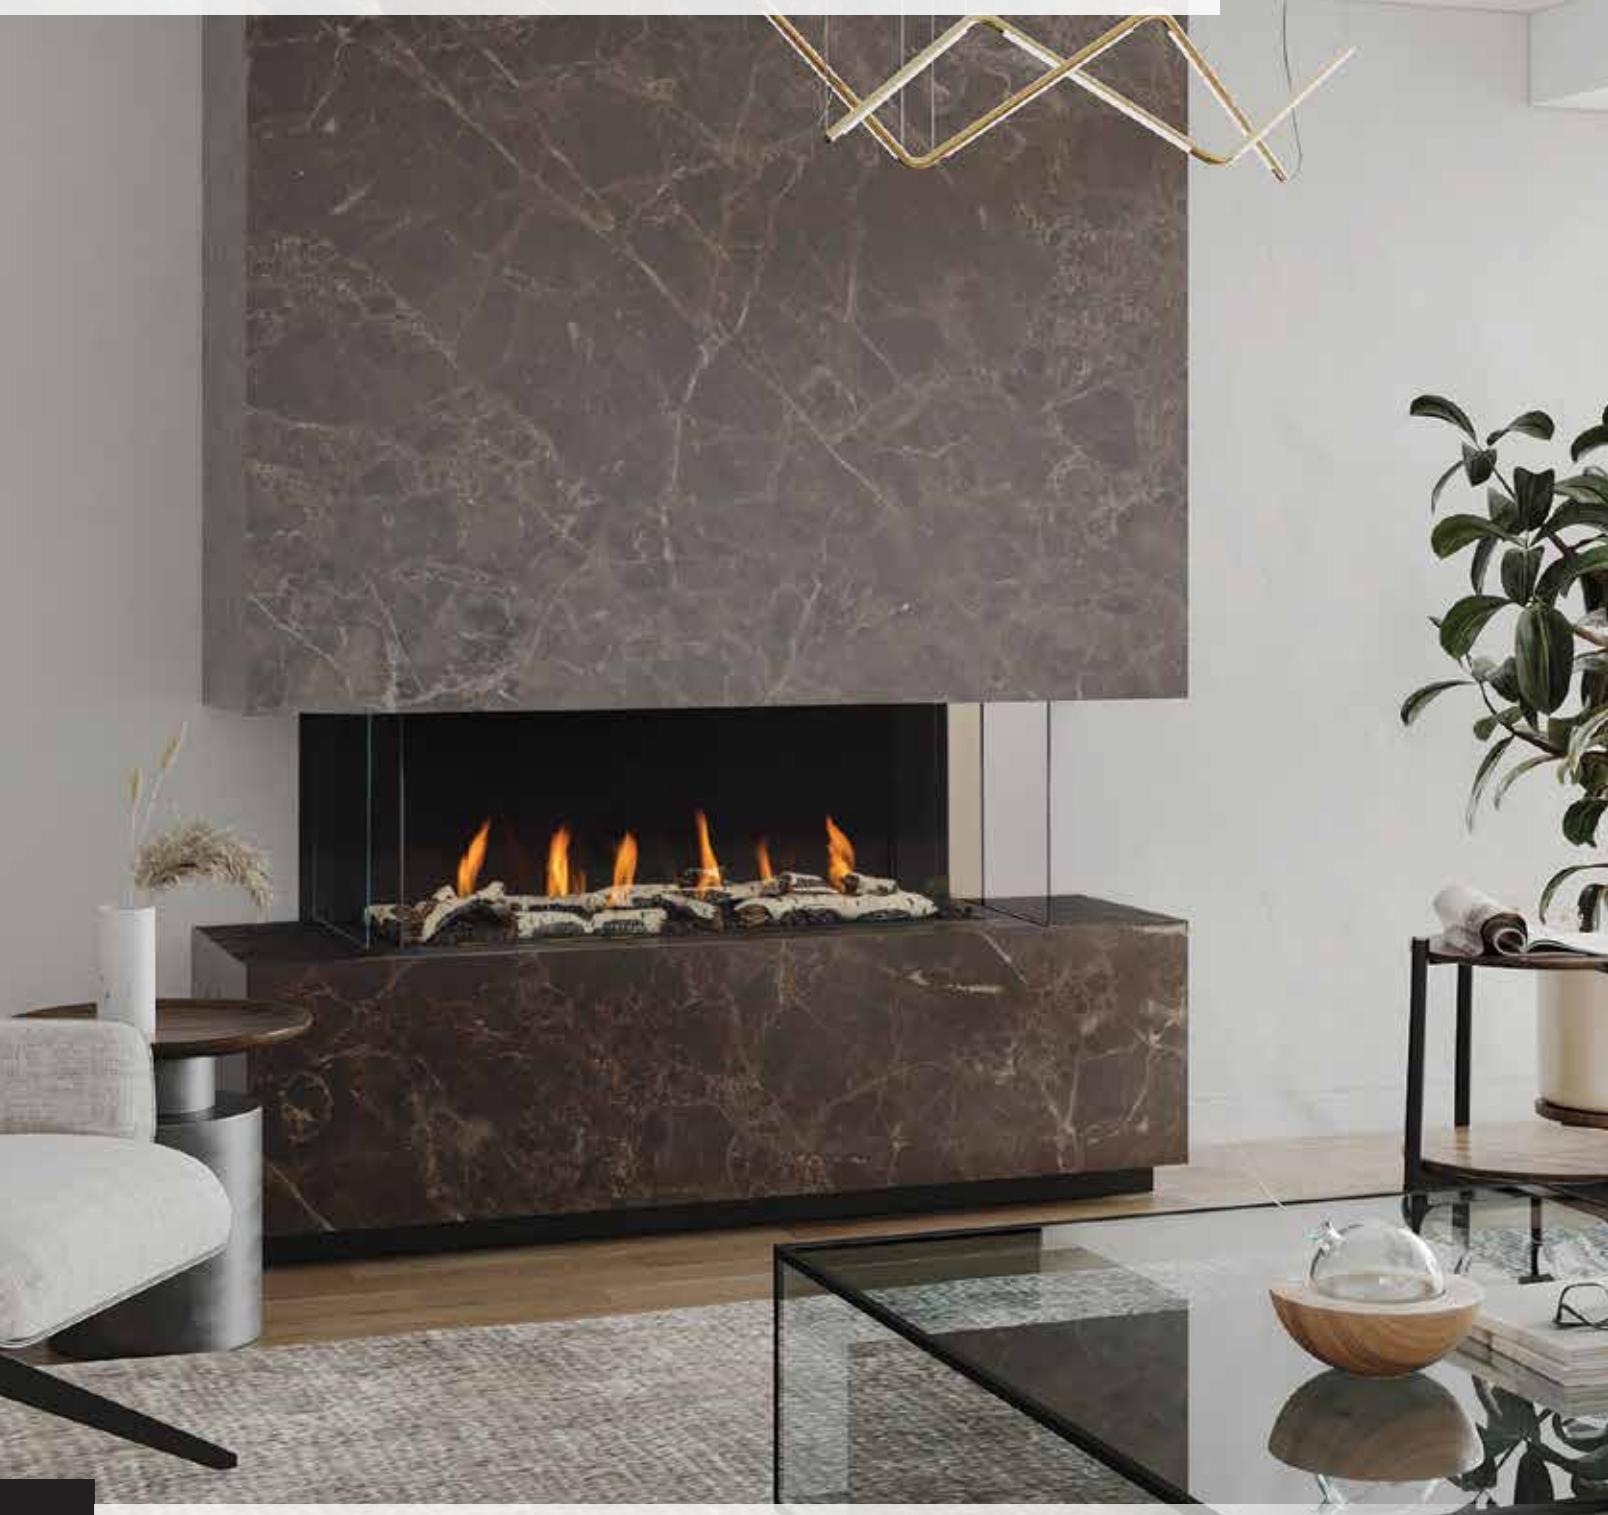

San Francisco Bay 50 shown with black reflective crystals, crushed black coal glass, birch log set and black steel interior panels.




New York View 50 shown with black reflective crystals, driftwood log set and black glass inner reflective panels (side vents not shown).

60


available as:




NEW YORK VIEW
Single Sided



CHICAGO CORNER
Corner Left or Right



SAN FRANCISCO BAY
Three Sided



SANTA MONICA PIER
Pier Left or Right



SEATTLE SEE-THROUGH
See-Through





Seattle See-Through 60 shown with black reflective crystals, volcanic stones in tan and black enamel inner reflective panels.

unique frameless
modern focal point







San Francisco Bay 60 shown with black reflective crystals, volcanic stones in grey and black glass inner reflective panels.

72


available as:



NEW YORK VIEW
Single Sided



CHICAGO CORNER
Corner Left or Right



SAN FRANCISCO BAY
Three Sided





New York View 72 shown with black reflective crystals, birch log set and black inner steel panels.

uninterrupted
view of the flames





San Francisco Bay 72 shown with black reflective crystals, volcanic stones in tan and black inner steel panels.



extended view panels

Flush to wall extended view panels center the fire, enhance opulence, and create visual balance. Through this extension, these black glass reflective panels create a sleek look that is complimentary to various architectural elements.

- Create the illusion of a larger fireplace
- Establish balance on a multi-function fireplace feature wall
- Black glass reflective finish amplifies the flame experience
- Can be used on New York 40, 50, 60 & 72 models to extend the length by 24"

1



In this photo, the fireplace is overshadowed by a large television, creating a top heavy fireplace feature wall

2



In this photo, the fireplace achieves visual prominence and balance with the addition of black glass extended view panels

corner installation kit

The corner installation kit transforms a San Francisco Bay 50, 60 or 72 into a Chicago Corner creating a stunning large-faced corner unit unlike anything you have ever seen before.







controllable warmth

FLEXIBLE VENTING OPTIONS

Regency's patented cool wall system releases heat at ceiling level which helps evenly distribute the airflow throughout the living space. Through this natural convection of air, excessive radiant heat is reduced and you are able to enjoy the utmost comfort and lounge in the warmth of beautiful flames more often.

- Enjoy the flexibility to choose from 3 different chase vent solutions
- Release warmth into the room discreetly



APP CONTROL

Put the power of flame directly in your hand. With the Proflame Connect Plus App, you can take control of your fireplace turning it on/off, adjusting the flame height, and temperature of your gas fireplace directly on your smartphone. The optional Wi-Fi enabled module provides the ultimate fireplace control.






cool wall system

Our patented cool wall system helps maintain the perfect wall surface temperature around the fireplace. The floating glass safety barrier draws in the cool air which is split between the heat exchanger and the inside wall surface. Within the heat exchanger, the air is heated and then directed out the back of the fireplace.

heat distribution kit

Increase the effectiveness of your fireplace by dispersing warm air from the fireplace to remote locations in the same room or other rooms in your home by using the Heat Wave™ power duct system.

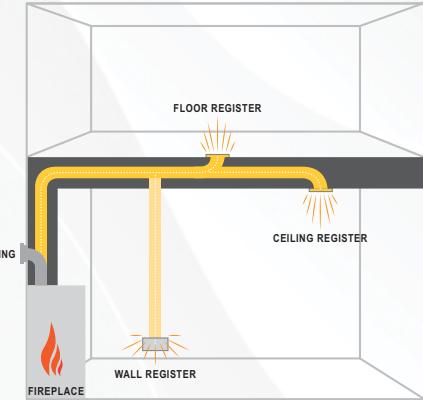

power vent systems


Regency's power vent systems have longer vertical and horizontal vents. Due to this functionality, designers and architects are able to build with freedom and flexibility to find the perfect space for your fireplace.

INLINE POWER VENT SYSTEM

- Allows for both vertical and horizontal termination (Horizontal terminations can use Regency's AstroCap)
- Vent runs up to 72 ft. (rigid pipe approved for up to 72 ft. & flex pipe approved for up to 40 ft.)
- Use up to six 90° elbows or twelve 45° elbows
- Use flex vent or rigid pipe
- Access panel required for servicing inline power vent



Inline Power Vent system shown
vertical vent run

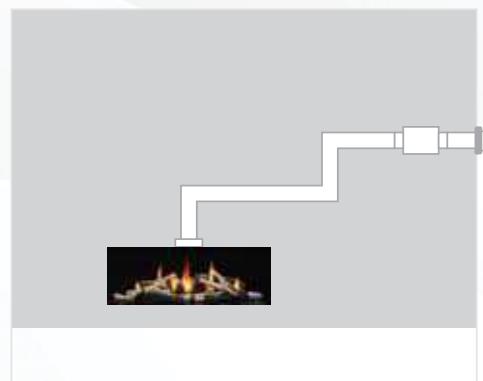

Inline Power Vent system shown
horizontal vent run

FLUSH HORIZONTAL TERMINATION POWER VENT

- Horizontal power vent wall termination cap (End of line power vent only) can be installed flush or adjusted to the depth of your wall
- No access panel required for servicing, unless the cap is not accessible from the exterior of home
- Can be painted to match the exterior of outside wall
- Vent runs up to 72 ft. (rigid pipe approved for up to 72 ft. & flex pipe approved for up to 40 ft.)
- Allows for 6 ft. (72") of negative vent run below first elbow
- Use up to six 90° elbows or twelve 45° elbows
- Use flex vent or rigid pipe



End of line flush horizontal Power Vent
system shown in a negative vent run



Horizontal Flush
Power Vent Cap
(Used on End of line
applications)



Horizontal Direct
Vent Astro Cap
(Used on Inline power
vent applications)



Inline Power Vent

create your own fireplace



COMPACT CHASE FRAMING KIT



EXTENDED CHASE FRAMING KIT



CORNER CHASE STARTER KIT

OPTIONAL FRAMING KITS

40" UNITS	WIDTH	DEPTH	HEIGHT (ADJUSTABLE)
Compact chase	48-7/16"	18-11/16"	80" - 10'
Extended chase	60-1/2"	18-11/16"	80" - 10'
Extended hearth	60-1/2"	24-7/16"	8-1/2" - 11-1/2"
Corner chase starter kit	49-3/4"	18"	62-7/8" Bottom of unit to top of framing kit

COMPACT CHASE STARTER KIT	50" UNITS	60" UNITS	72" UNITS
Width	60"	71-5/16"	82-7/8"
Depth	20-1/2"	20-3/8"	20-3/8"
Height	62" Bottom of unit to top of framing kit	78-1/2" Bottom of unit to top of framing kit	83-1/2" Bottom of unit to top of framing kit




Regency steel framing kit



commercial use

Our City Series line is popular among architects, builders, and designers as it is able to accommodate a versatile range of projects. Due to features such as our power venting system, these models are perfect for commercial and residential installations such as hotels, restaurants, and even condominiums.

Contact Regency to find out more about our designer friendly line that adds the perfect touch of modernism and elegance to any place.



accessories


ACCESSORIES - AT A GLANCE			CST50E	CST60E	CP60E	CB40E	CB50E	CB60E	CB72EPV	CC40RE • CC40LE	CV40E	CV50E	CV60E	CV72E	
Clean face design			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Interior options	Firebed	Crystals in various colors	★	★	★	★	★	★	★	★	★	★	★	★	
		Firebeads in various colors	★	★	★	★	★	★	★	★	★	★	★	★	
		Sea wool	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	For firebox floor	Crushed glass in various colors	★	★	★	★	★	★	★	★	★	★	★	★	
		Ceramic spa stones	★	★	★	★	★	★	★	★	★	★	★	★	
		Volcanic stones	★	★	★	★	★	★	★	★	★	★	★	★	
		Natural river pebbles	★	★	★	★	★	★	★	★	★	★	★	★	
	Log set	Lava embers	★	★	★	★	★	★	★	★	★	★	★	★	
		Driftwood log set	★	★	★	★	★	★	★	★	★	★	★	★	
		Split oak log set	★	★	★	★	•	★	★	★	★	★	★	★	
	Inner panels	Birch log set	★	★	★	★	★	★	★	★	★	★	★	★	
		Matte black	★	★	★	★	★	★	★	★	★	★	★	★	
		Black enamel	★	★	★	★	★	★	★	★	★	★	★	★	
		Black glass	★	★	★	★	★	★	★	★	★	★	★	★	
Glass safety barrier (patented)			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
3/4" faceplate			★	★	•	•	•	•	•	•	★	★	★	•	
Extended view side panels			•	•	•	•	•	•	•	•	•	★	★	★	
Corner installation kit			•	•	•	•	•	★	★	★	•	•	•	•	
Framing kits	Compact chase	•	•	•	★	•	•	•	•	•	•	•	•	•	
	Extended chase	•	•	•	★	•	•	•	•	•	•	•	•	•	
	Extended hearth	•	•	•	★	•	•	•	•	•	•	•	•	•	
	Starter kit	•	•	•	•	★	★	★	★	★	•	•	•	•	
Hearth top - black glass			•	•	•	★	•	•	•	•	•	•	•	•	
TV wiring kit			★	★	★	★	★	★	★	★	★	★	★	★	
Chase grills	Front chase grill	★	★	★	★	★	★	★	★	★	★	★	★	★	
	Side chase grill 2pk	•	•	•	★	•	•	•	•	★	★	•	•	•	
Accent lights			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Proflame II wall mount or handheld remote			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Venting	Direct vent	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	
	Power vent	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	AstroCap® venting system	★	★	★	★	★	★	★	★	★	★	★	★	★	
	Heat Wave™ power duct system	★	★	★	★	★	★	★	★	★	★	★	★	★	
	Heat Wave™ adapter	★	★	★	★	★	★	★	★	★	★	★	★	•	
Wifi module for app control			★	★	★	★	★	★	★	★	★	★	★	★	
Propane conversion kit			★	★	★	★	★	★	★	★	★	★	★	★	

• Not available

✓ Standard

★ Optional

REMOTE



Proflame II Wall
Mount or Handheld

specifications

► Natural Gas



SPECIFICATIONS - NATURAL GAS		INPUT (BTU)	TURN DOWN TO (BTU)	EFFICIENCY (STEADY STATE)	ENERGUIDE RATING (CANADA ONLY)
Seattle See-Through	CST60E	39,000	21,000	64.04%	60.21%
	CST50E	35,000	19,000	62.39%	57.49%
Santa Monica Pier	CP60E	39,000	21,000	64.04%	60.21%
San Francisco Bay	CB40E	28,500	15,500	60.02%	55.23%
	CB50E	35,000	19,000	62.39%	57.49%
	CB60E	39,000	21,000	60.86%	56.23%
	CB72EPV	46,500	32,000	61.65%	63.39%
Chicago Corner	CC40RE • CC40LE	28,500	15,500	60.02%	55.23%
New York View	CV40E	28,500	15,500	60.02%	55.23%
	CV50E	35,000	19,000	62.39%	57.49%
	CV60E	39,000	21,000	55.44%	51.22%
	CV72E	46,500	32,000	63.06%	57.81%

► Propane

SPECIFICATIONS - PROPANE		INPUT (BTU)	TURN DOWN TO (BTU)	EFFICIENCY (STEADY STATE)	ENERGUIDE RATING (CANADA ONLY)
Seattle See-Through	CST60E	36,000	19,500	65.61%	62.48%
	CST50E	33,000	17,000	64.30%	60.55%
Santa Monica Pier	CP60E	36,000	19,500	65.61%	62.48%
San Francisco Bay	CB40E	28,500	15,500	60.70%	56.06%
	CB50E	33,000	17,000	64.30%	60.55%
	CB60E	36,000	19,500	61.77%	56.43%
	CB72EPV	45,500	36,000	64.20%	65.52%
Chicago Corner	CC40RE • CC40LE	28,500	15,500	60.70%	56.06%
New York View	CV40E	28,500	15,500	60.70%	56.06%
	CV50E	33,000	17,000	64.30%	60.55%
	CV60E	36,000	19,500	55.67%	51.96%
	CV72E	45,500	36,000	63.83%	60.61%

specifications


Seattle See-Through units :

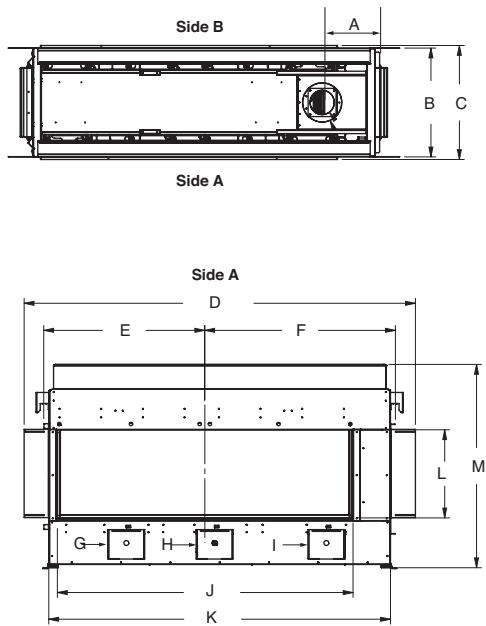

	CST60E	CST50E
A	12-11/16"	11-7/8"
B	22-3/16"	22-3/16"
C	23-1/4"	23-3/16"
D	79-1/13"	62-3/8"
E	32-13/16"	28-11/16"
F	38-7/8"	30-5/8"
G, H, I	n/a	n/a
J	60-5/16"	49-1/4"
K	69-11/16"	52-5/16"
L	18"	18"
M	41-1/2"	41-9/16"
N	36-1/2"	34-3/8"
O	10-1/8"	10-1/8"

NOTE: CST60E, CST50E : These models come with a 5" inner and 8" outer collar when venting this as a direct vent. When installed as a power vent, The vent must be reduced to 4" x 6-5/8" in all applications.

San Francisco Bay units :

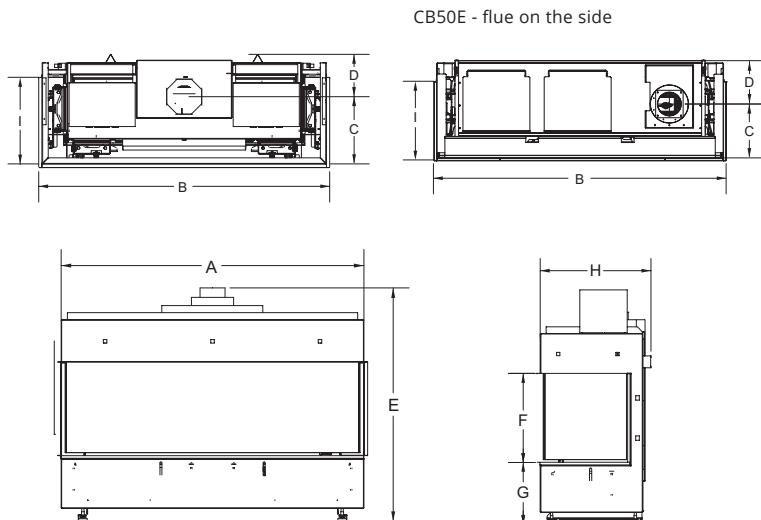

NOTE: CB50E flue is on the side




UNITS	VENTING
CB40E	4" x 6-5/8"
CB50E, CB60E, CB72EPV	5" x 8"

	CB40E	CB50E	CB60E	CB72EPV
A	48-7/16"	60"	71-1/4"	82-11/16"
B	49-5/8"	61-1/16"	72-5/16"	83-7/8"
C	11-7/16"	11-5/16"	13"	13"
D	7-1/4"	9-1/8"	7-1/4"	7-3/8"
E	37-3/8"	37"	39-1/4"	46-1/4"
F	15-1/16"	18"	18"	15-1/16"
G	10-1/2"	10-13/16"	10-1/4"	10-1/4"
H	18-11/16"	20-7/16"	20-5/16"	20-3/8"
I	14-11/16"	18"	16"	17"




NOTE : CB50E, CB60E, CB72EPV : This model comes with a 5" inner and 8" outer collar which must be reduced to 4" x 6-5/8" in all applications when installed as a power vent. See manual for details.

specifications

Chicago Corner units :

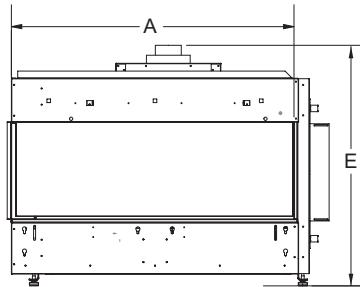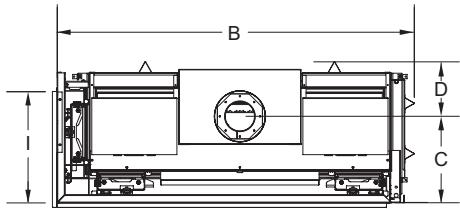


New York View units :

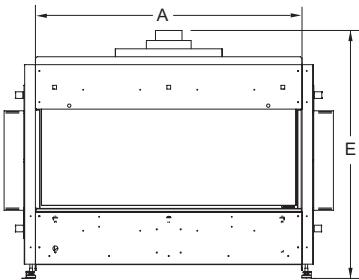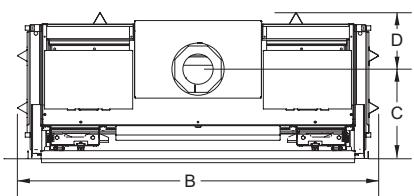

NOTE: CV50E flue is on the side

CV50E - flue on the side

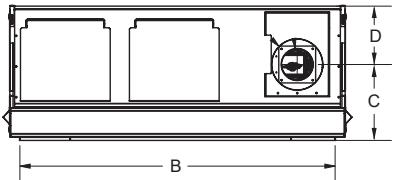

	CC40RE • CC40LE	CV40E	CV50E	CV60E	CV72E
A	43-5/8"	40"	54-3/8"	60-7/16"	72-1/8"
B	47-3/8"	46-1/4"	49-3/16"	65-11/16"	77-7/16"
C	11-7/16"	11-7/16"	11-7/8"	13-9/16"	13"
D	7-1/4"	7-1/4"	9-1/8"	7-1/4"	7-3/8"
E	37-3/8"	37-3/8"	37"	39-5/16"	46"
F	15-1/16"	15-1/16"	18"	16"	15-1/16"
G	10-1/2"	10-1/2"	10-3/16"	10-1/4"	10-1/4"
H	18-11/16"	18-11/16"	20-7/16"	20-5/16"	20-3/8"
I	14-11/16"	--	18"	16"	--


UNITS	VENTING
CC40RE, CC40LE	4" x 6-5/8"
CV40E	4" x 6-5/8"
CV50E, CB50E, CV60E, CB60E, CST60E, CP60E, CV72E	5" x 8"

NOTE : CV50E, CB50E, CV60E, CB60E, CST60E, CP60E & CV72E : These models come with a 5" inner and 8" outer collar which must be reduced to 4" x 6-5/8" in all applications when installed as a power vent. See manual for details.


specifications

Seattle See-Through unit :

Flush installation is when the chase enclosure height is at a minimum of 81-1/4" or greater. This would be a typical installation, with walls placed between two rooms to divide them.

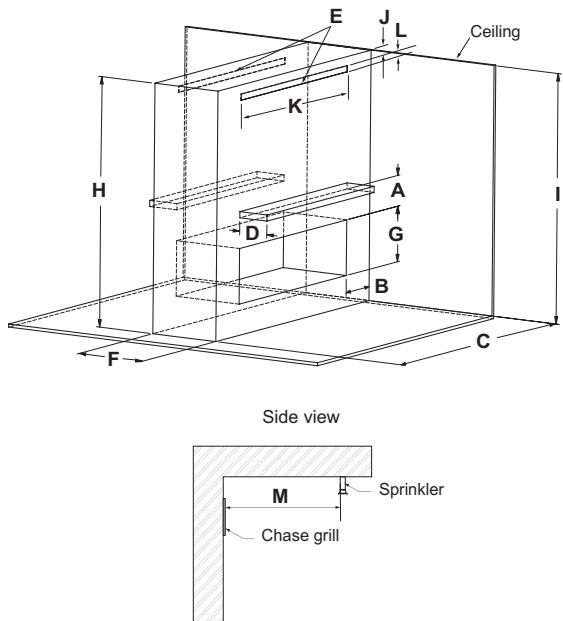

Bench installation is when the chase enclosure height is at a minimum of 52" to a maximum of 81-1/4". If the bench installation is completed at the minimum height, a shelf, countertop, or other finish can be installed.

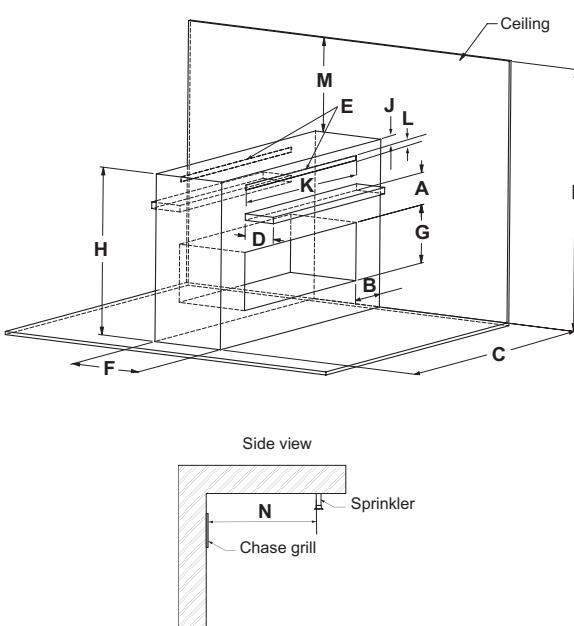

NOTE: Refer to manual for more flush and bench installation examples.

CLEARANCES - FLUSH INSTALLATION		CST60E	CST50E
A	Mantel Height (min.)	**	**
B	Sidewall (on one side)	8"	6"
C	Enclosure Width (min.)	71-3/4"	71-3/4"
D	Mantel Depth (max.)	**	**
E	Convection Air Outlet	120 sq. in.*	120 sq. in.*
F	Framing Depth (min.)	22-1/4"	22-1/4"
G	Opening Height	18"	18"
H	Chase Enclosure (min.)	81-1/4"	81-1/4"
I	Ceiling Height (min.)	81-1/4"	81-1/4"
J	Convection Air Outlet Opening Offset (max.)	2"	2"
K	Convection Air Outlet Opening Width (min.)	10"	10"
L	Convection Air Outlet Opening Height (min.)	1-1/2"	1-1/2"
M	Clearance to Sprinkler Head (min.)	36"	36"

Ventilation Opening requirements: *A minimum of 120 sq. in. of open area, not lower than 0 - 2" from top of enclosure, is required for all installations.

** See mantel clearances chart in the manual.


CLEARANCES - BENCH INSTALLATION		CST60E	CST50E
A	Mantel Height (min.)	**	**
B	Sidewall (on one side)	8"	6"
C	Enclosure Width (min.)	71-3/4"	71-3/4"
D	Mantel Depth (max.)	**	**
E	Convection Air Outlet	180 sq. in.*	175 sq. in.*
F	Framing Depth (min.)	22-1/4"	22-1/4"
G	Opening Height	18"	18"
H	Chase Enclosure (min.)	52" to 81-1/4" max.	52" to 81-1/4" max.
I	Ceiling Height (min.)	81-1/4"	81-1/4"
J	Convection Air Outlet Opening Offset (max.)	2"	2"
K	Convection Air Outlet Opening Width (min.)	10"	10"
L	Convection Air Outlet Opening Height (min.)	1-1/2"	1-1/2"
M	Ceiling Clearance (min.)	3"	3"
N	Clearance to Sprinkler Head (min.)	36"	36"

Ventilation Opening requirements: *A minimum of 180 sq. in. of open area, not lower than 0 - 2" from top of enclosure, is required for all installations.


** See mantel clearances chart in the manual. For clearances greater than 81-1/4", see flush installation clearances in this manual. The size of the ventilation opening is reduced from 180 sq. in. to 120 sq. in.

specifications


San Francisco Bay units :

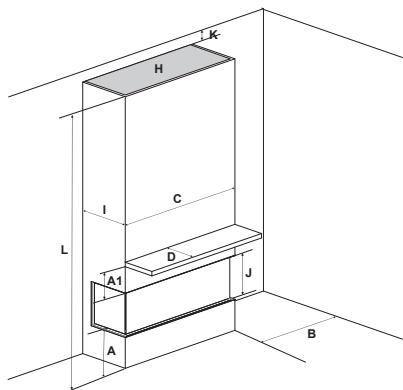


Floor to ceiling with top opening

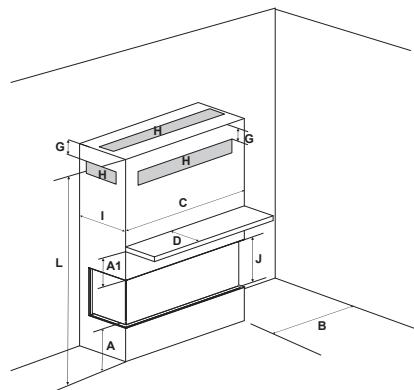


Low framing with vents in front/sides or top

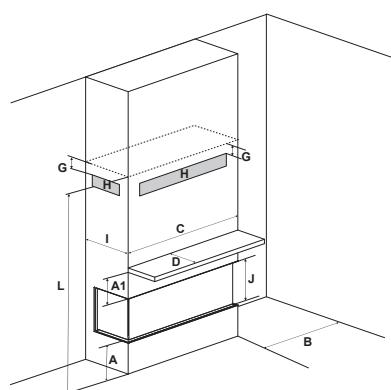


Full framing with low vents in front or sides

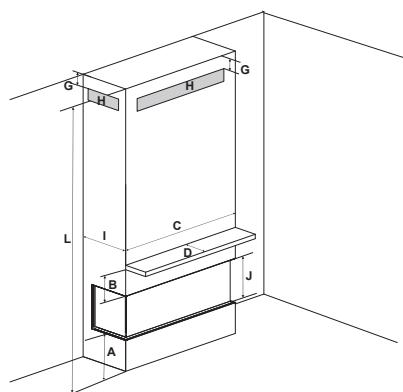

Full framing with vents in front or sides



Alcove




Side view

CLEARANCES		CB40E	CB50E	CB60E	CB72EPV
A	From Floor	Min. 0"	Min. 0"	Min. 0"	Min. 0"
A1	Mantel Height (min.)	**	**	**	**
B	Sidewall (on one side)	8-1/2"	5"	5-7/8"	8"
C	Enclosure Width (min.)	48-7/16"	60"	71-1/4"	82-11/16"
D	Mantel Depth (max.)	**	**	**	**
E	Alcove Width	84"	92"	119-1/2"	120"
F	Alcove Depth	36"	35"	35"	36"
G	To Enclosure Ceiling (min./max.)	0 - 3"	0 - 2"	0 - 2"	0 - 2"
H	Convection Air Outlet	120 sq. in.	152 sq. in.	180 sq. in.	288 sq. in.
I	Enclosure Depth (min.)	19"	20-7/16"	20-5/16"	20-3/8"
J	Opening Height	15-1/16"	18"	18"	15-1/16"
K	To Ceiling (min.) - All 3 sides	1-1/2"	1-3/4"	1-3/4"	2-1/2"
L	Chase Enclosure (min.)	63"	62-7/8"	81-1/4"	87"
M	Clearance to Sprinkler Head (min.)	36"	36"	36"	36"

** See mantel clearances chart in the manual.

specifications


Chicago Corner units :

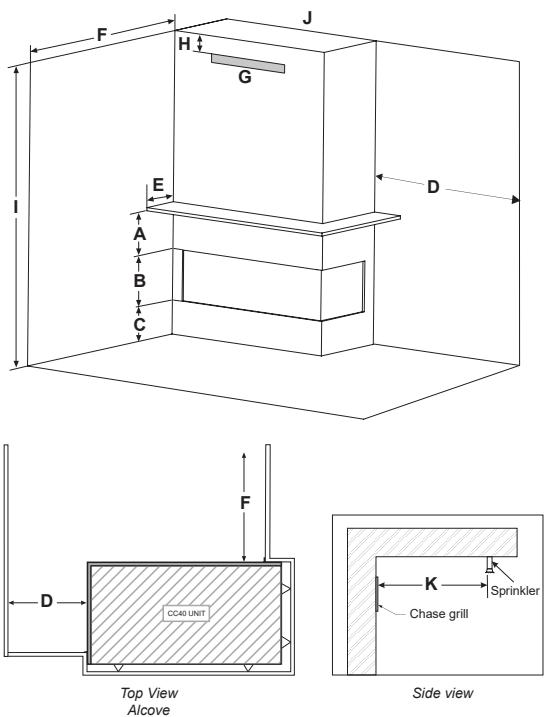

CLEARANCES		CC40RE • CC40LE
A	Mantel Height (min.)	**
B	Opening Height	15-1/16"
C	From Floor	Min. 0"
D	Sidewall (on one side)	Min. 36"
E	Mantel Depth (max.)	**
F	Alcove Depth	Min. 36"
G	Convection Air Outlet	120 sq. in.
H	Convection Air Outlet Opening Offset	0 - 3"
I	Chase Enclosure (min.)	63"
K	Clearance to Sprinkler Head (min.)	36"

** See mantel clearances chart in the manual.

New York View units :

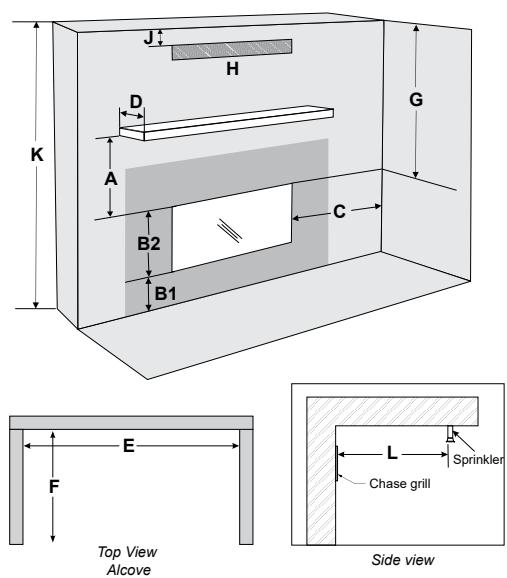


CLEARANCES		CV40E	CV50E	CV60E	CV72E
A	Mantel Height (min.)	**	**	**	**
B1	From Floor	Min. 0"	Min. 0"	Min. 0"	Min. 0"
B2	Opening Height	15-1/16"	18"	18"	15-1/2"
C	Sidewall (on one side)	8-1/2"	5"	8"	8"
D	Mantel Depth (max.)	**	**	**	**
E	Alcove Width	84"	92"	109-1/2"	88"
F	Alcove Depth	36"	35"	35"	36"
G	Ceiling (in front of fireplace)	38-15/16"	38-15/16"	53"	61-3/4"
H	Convection Air Outlet	120 sq. in.	152 sq. in.	180 sq. in.	288 sq. in.
J	Convection Air Outlet Opening Offset	0 - 3"	0 - 2"	0 - 2"	0 - 2"
K	Chase Enclosure (min.)	63"	62-7/8"	81-1/4"	87"
L	Clearance to Sprinkler Head (min.)	36"	36"	36"	36"


** See mantel clearances chart in the manual.

framing

Seattle See-Through unit :

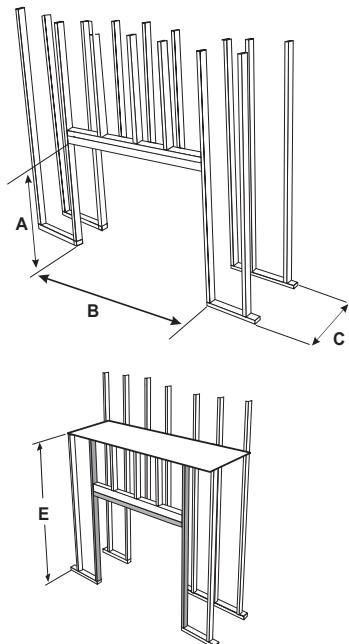


San Francisco Bay units :

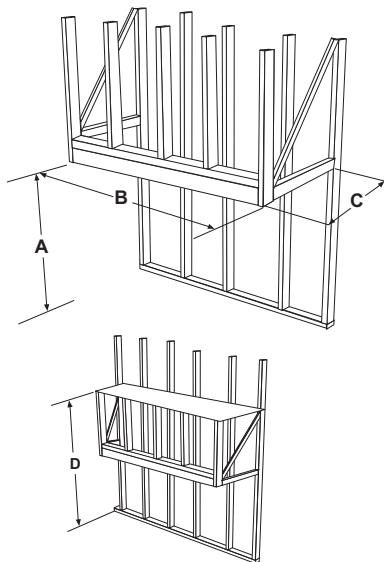

FRAMING	CST60E	CB40E	CB50E	CB60E	CB72EPV
A Framing Height	For 2" x 4": 45-1/8" For 2" x 6": 52"	37-3/8"	For 2" x 4: 44-3/4" For 2" x 6: 51-7/8"	44-3/4"	51"
B Framing Width	71-3/4"	48-1/2"	60"	71-1/4"	82-11/16"
C Framing Depth	22-1/4"	19"	20-7/16"	20-5/16"	20-5/8"
D Minimum Height to Combustibles	Bench: 52" Flush: 81-1/4"	63"	62-7/8"	81-1/4"	87"


Visit www.regency-fire.com/cityseries for City Series downloads including:

- Specifications
- Detailed drawings
- Manuals
- Framing & clearances




framing

Chicago Corner units :

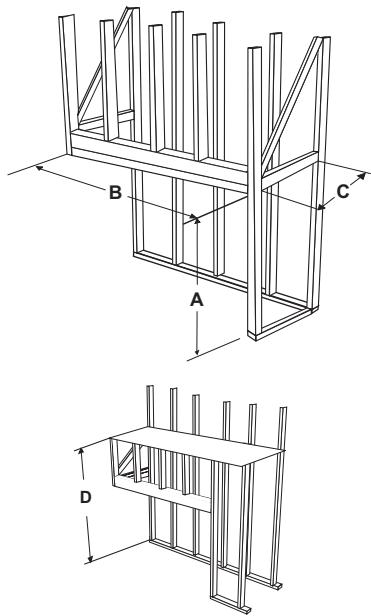

New York View units :

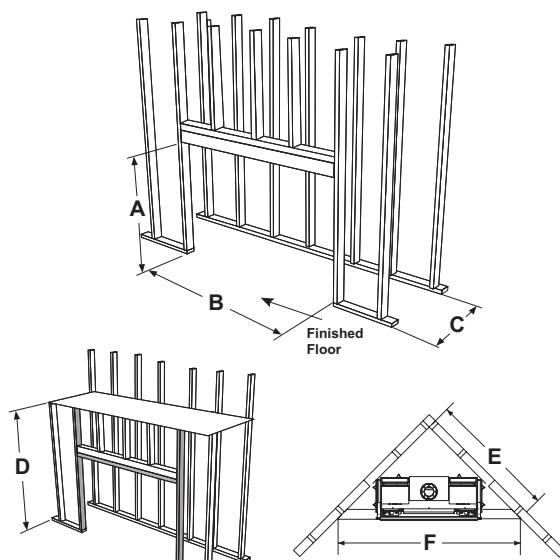

FRAMING	CC40RE • CC40LE	CV40E	CV50E	CV60E	CV72E
A Framing Height	37-3/8"	37-3/8"	For 2" x 4: 44-3/4" For 2" x 6: 51-7/8"	44-3/4"	51"
B Framing Width	48-1/4"	46-3/4"	54-3/8"	65-11/16"	78"
C Framing Depth	19"	19"	20-7/16"	20-5/16"	20-5/8"
D Minimum Height to Combustibles	63"	63"	62-7/8"	81-1/4"	87"
E Corner Wall Depth	-	55"	66"	73-7/16"	82-1/8"
F Corner Facing Wall Width	-	77-3/4"	93-3/8"	103-7/8"	116-3/16"

experience the luxury
& true frameless fire

 **REGENCY[®]**

regency-fire.com/cityseries

©2024 FPI Fireplace Products International Ltd. Regency®, AstroCap® and Heat Wave™ are registered or
proprietary trademarks of FPI Fireplace Products International Ltd. All rights reserved. Printed in Canada (02/25)
Part No. 944-427



CONTEMPORARY GAS FIREPLACES



regency-fire.com

WHY CHOOSE REGENCY?

For the past 40+ years Regency has been focused on creating innovative, high-quality and reliable products that reduce heating costs and add true value to the home. We design all our products to be durable and last a lifetime so that our customers can enjoy them for years to come.

HIGH-QUALITY

Producing a high-quality product has been at the very heart of what we do from when that very first stove rolled off the production line over 40 years ago to today. We are ever-focused on producing quality products for our customers that will last for years to come.

BEST WARRANTY

A fireplace should be reliable and should work right the first time it is used, and the 1,000th. A core part of our business is making sure that we are building long-lasting, durable, high-quality products; we back-up that commitment with the industry's best warranty on all our products.

COST-EFFICIENT

Never before have home heating costs been higher. Turn your furnace way down and zone heat with our beautiful, reliable and convenient Regency products. Not only can you cut your fuel bills in half, but you'll be able to enjoy the timeless comfort of a Regency fire.

Why Regency? Because it's **more** than a fireplace!



TABLE OF CONTENTS

Regency Ultimate™ Gas Fireplaces	
U1500E	04
U900E	06
Regency Horizon® Gas Fireplaces	
HZ54E	08
HZ40E	10
Grandview Gas Fireplaces	
G800 & G600	12
Design Options	14
Accessories	16
Specifications	18



REGENCY ULTIMATE™ U1500E

Large Contemporary Gas Fireplace



U1500E shown with black contemporary inner door frame.**

COST-EFFICIENT HEATING

Enjoy a wide landscape view of our most realistic log sets and glowing ember-bed with the U1500E Ultimate gas fireplace. The Ultimate series features a seamless design, coastal driftwood logs set upon a glowing linear ember-bed, and beautiful wide-angle flames enhanced by reflective black enamel side panels.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	43,000	42,000
Turn down to (BTU)	29,000	33,500
Efficiency (steady state)	73.72%	74.67%
EnerGuide Rating (Canada only)	67.46%	69.64%

DIMENSIONS

Viewing Area	611 sq. in. 45-1/4" x 13-1/2"
Width (Clean finish)	49-11/16"
Height (Clean finish)	18-11/16"

For additional surround dimensions see page 21.
For detailed specifications please see pages 18-20.

**NOTE: The wall above fireplace is non-combustible



U1500E shown with inner door frame and premium glass surround in black.

STANDARD FEATURES

- Natural gas
- Safety screen
- Glowing linear ember bed
- Ceramic burner & driftwood log set
- Black enamel reflective side panels
- Electronic ignition
- Variable speed blower
- Proflame II GTMF remote control system
- Direct vent
- Limited lifetime warranty

OPTIONS

- Contemporary inner door frame & black surround
- Inner door frame in black
- Premium glass surround in black
- Flush finish option (no outer frame required)
- Optional finishing trim for clean edge finish
- Steel stud framing kit (recommended)
- AstroCap® venting system
- HeatWave™ power duct kit
- Propane conversion kit

REGENCY ULTIMATE™ U900E

Medium Contemporary Gas Fireplace



U900E shown with black contemporary inner door frame.**

ULTIMATE FLAME PACKAGE

The Regency ultimate linear gas fireplace showcases our best-in-class flame and log package. Perfect for modern spaces and open concept living areas, clean-burning heat is distributed throughout your home. The black enamel reflective panels accentuate the fire to create the perfect ambiance.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	34,000	31,500
Turn down to (BTU)	23,500	25,000
Efficiency (steady state)	73.31%	73.77%
EnerGuide Rating (Canada only)	68.28%	69.49%

DIMENSIONS

Viewing Area	455 sq. in. 35" x 13"
Width (Clean finish)	39-3/8"
Height (Clean finish)	17-11/16"

For additional surround dimensions see page 21.
For detailed specifications please see pages 18-20.

**NOTE: The wall above fireplace is non-combustible



U900E shown with black contemporary inner door frame.

STANDARD FEATURES

- Natural gas or propane
- Safety screen
- Glowing linear ember bed
- Ceramic burner & driftwood log set
- Black enamel reflective side panels
- Electronic ignition
- Variable speed blower
- Proflame II GTMF remote control system
- Direct vent
- Heat exchanger
- Limited lifetime warranty

OPTIONS

- Contemporary inner door frame & black surround
- Inner door frame in black
- Premium glass surround in black
- Flush finish option (no outer frame required)
- Optional finishing trim for clean edge finish
- Steel stud framing kit (recommended)
- AstroCap® venting system
- HeatWave™ power duct kit

REGENCY HORIZON® HZ54E

Large Contemporary Gas Fireplace



HZ54E shown with stainless steel inner door frame and faceplate, black enamel reflective panels and black crystals.**

STUNNING CONTEMPORARY STYLE

The Regency Horizon HZ54E offers a wide-angle view of our unique and dramatic flame, perfect for contemporary homes and open concept living spaces. Inner reflective panels amplify the appearance of this stunning fire. Contemporary styling is paired with practical function, delivering consistent, controllable heat – even during power outages.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	41,500	37,000
Turn down to (BTU)	29,000	30,000
Efficiency (steady state)	69.36%	72.02%
EnerGuide Rating (Canada only)	64.45%	67.72%

DIMENSIONS

Viewing Area	685 sq. in. 45-7/8" x 14-15/16"
Width (Clean finish)	56-11/16"
Height (Clean finish)	25-1/8"

For additional surround dimensions see page 21.
For detailed specifications please see pages 18-20.

**NOTE: The wall above fireplace is non-combustible



HZ54E shown with black inner door frame and faceplate, black enamel reflective panels, crystals and volcanic stones.



HZ54E shown with inner door frame and verona glass surround in black, black enamel reflective panels, black crystals and driftwood log set.

STANDARD FEATURES

- Natural gas or propane
- Safety screen
- 40" burner covered with crystals (purchased separately)
- Electronic ignition with SureFire™ switch
- Proflame I GTMF remote control
- Direct vent
- Limited lifetime warranty

OPTIONS

- Contemporary inner frame & faceplate in black or brushed stainless steel
- Verona black glass surround
- Black enamel inner reflective panels
- Ceramic spa stones, volcanic stones
- Crystals in various colors
- Firebeads in various colors
- Natural river pebbles
- Driftwood log set
- Wall thermostat
- AstroCap® venting system
- Variable speed blower
- HeatWave™ power duct kit
- Steel stud framing kit (recommended)

REGENCY HORIZON® HZ40E

Medium Contemporary Gas Fireplace



HZ40E shown with inner door frame and Verona glass surround in black, black enamel inner panels, black crystals and driftwood log set.**

IMPRESSIVE FIRE

The HZ40E is a dramatic contemporary fireplace that includes today's sleek, wide contemporary fireplace styling in any medium size living space. You can add a tasteful surround in a variety of modern finishes or enjoy a clean finish with no louvers or faceplates. What sets the Regency Horizon apart from all others is the strong, impressive fire that appears like magic through a firebed of crystals or spa stones.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	26,000	25,500
Turn down to (BTU)	18,000	21,000
Efficiency (steady state)	69.70%	72.03%
EnerGuide Rating (Canada only)	64.44%	66.75%

DIMENSIONS

Viewing Area	444 sq. in. 35-1/2" x 12-1/2"
Width (Clean finish)	39-13/16"
Height (Clean finish)	16-7/8"

For additional surround dimensions see page 21.
For detailed specifications please see pages 18-20.



HZ40E shown with inner door frame and Verona faceplate in stainless steel, black firebeads and black enamel inner panels.**



HZ40E shown with black inner door frame, volcanic stones and black enamel inner panels.

STANDARD FEATURES

- Natural gas or propane
- Safety screen
- 30" burner covered with crystals (purchased separately)
- Electronic ignition with SureFire™ switch
- Proflame I GTMF remote control
- Direct vent
- Limited lifetime warranty

OPTIONS

- Flush finish option (no outer frame required)
- Contemporary outer faceplate in 2 colors (in 2 styles)*
- Contemporary inner door frame in 2 colors
- Verona black glass surround
- Black enamel inner reflective panels
- Ceramic spa stones, volcanic stones
- Crystals in various colors
- Firebeads in various colors
- Natural river pebbles
- Driftwood log set
- Wall thermostat
- Variable speed blower
- AstroCap® venting system
- HeatWave™ power duct kit
- Steel stud framing kit (recommended)

*must also purchase inner door frame with this option

**NOTE: The wall above fireplace is non-combustible

REGENCY GRANDVIEW G600 • G800

Medium and Large Gas Fireplaces with Contemporary Options



G600C shown with driftwood log set and black inner steel panels.

ONE FIREPLACE, UNLIMITED POSSIBILITIES

Designed using customer feedback, the Regency Grandview gas fireplace is our most flexible fireplace yet! The Grandview series offers stunning flame pictures and full customization, allowing homeowners to pick and choose the accessories and elements that best suit their style – with over 960 combinations, there is a Grandview for every home and every style.

Choose from traditional installation or utilize Regency's patented Cool Wall System to provide ultimate design flexibility. The Regency Cool Wall system allows the use of virtually any material to the edge of the fireplace or the placement of TVs or artwork directly above the fire; without any limitations.

COOL WALL SYSTEM ADVANTAGES

- Place a TV above the fireplace without it getting damaged
- Hang artwork without fear of warping
- Paint will not discolor, drywall will not crack
- No internal fans required
- Use any finish right to the edge of the fire, even wood or wallpaper

DIMENSIONS	G600	G800
Viewing Area	600 sq. in.	800 sq. in.
Width	31-7/8"	35-7/8"
Height	29-7/8"	35-7/8"
Depth	14-5/8"	16-7/8"



G800C shown with coal black crushed glass and painted black steel panels installed with a clean front finish using the cool wall system and chase vent.



Iceberg crushed glass, black steel panels and black faceplate



Ginger crushed glass and antique copper faceplate



Iceberg crushed glass, volcanic stones and black steel panels

STANDARD FEATURES

- Clean front design
- Largest viewing area in its class
- Integrated safety screen
- Ceramic glass
- Flame height adjustment control
- Standing Pilot (Direct Spark Ignition available)
- Electronic Ignition with Proflame II
- GTMF remote control
- Rear or top vent for versatile installations
- Natural gas
- Limited lifetime warranty

OPTIONS

- Choose from a variety of media options: Crushed glass, volcanic stones or driftwood log set
- Cool Wall system to allow for any finishing material right to the edge of the fireplace
- Inner reflective panels in black enamel
- Inner painted black steel panels
- Surrounds in various colors
- Finishing trims for easy finishing around the fireplace
- Variable speed blower
- Chase vent (cool wall installations)
- Propane conversion kit
- ON/OFF remote control (Standing Pilot Model)
- AstroCap® venting system

Learn More at regency-fire.com/grandview

INTEGRATED FIREPLACE SOLUTIONS



DESIGN OPTIONS

FLUSH/CLEAN EDGE DESIGN OPTION



METAL SURROUNDS



GLASS SURROUNDS



FIREBED OPTIONS


CRYSTALS & FIREBEADS



Crystals - Black



Crystals - Copper



Crystals - Starfire



Firebeads - Black



Firebeads - Caramel Luster



Firebeads - Glacier Ice

STONES & LOGS



Volcanic Stones - Gray



Volcanic Stones - Tan



Ceramic Spa Stones



Driftwood Ceramic Log Set

INNER PANELS



Reflective
Black Enamel Panels

ACCENT PEBBLES



Natural River Pebbles

FINISHING OPTIONS



Metal Surround - Black



Metal Surround -
Stainless Steel



Glass Surround -
Pure Black

OPTIONS

ACCESSORIES - AT A GLANCE			U1500E	U900E	HZ54E	HZ40E
Clean edge design option			✓	✓	•	✓
Metallic surrounds	Faceplates & Verona surrounds	Black	★	★	★	★
		Brushed stainless steel	•	•	★	★
	Finishing trim	Black	★	★	•	•
Glass surrounds	Verona glass surrounds	Pure black	★	★	★	★
Safety screen			✓	✓	✓	✓
Interior options	Regency Horizon firebed	Crystals - various colors	•	•	★	★
		Firebeads - various colors	•	•	★	★
		Ceramic spa stones	•	•	★	★
		Volcanic stones	•	•	★	★
	Driftwood ceramic logs		✓	✓	★	★
	Accent pebbles (for firebox floor)	Natural river pebbles	•	•	★	★
	Inner panels	Black enamel	✓	✓	★	★
	Remote controls	Proflame GTMF	✓	✓	✓	✓
		Proflame GTMFS	•	•	•	•
Controls	Wall mounted on/off switch		✓	✓	✓	✓
	Thermostat		•	•	★	★
	Variable speed blower		✓	✓	★	★
Venting	Direct vent		✓	✓	✓	✓
	AstroCap® venting system		★	★	★	★
	HeatWave power duct kit		★	★	★	★
LP conversion kit			★	•	•	•

- Not available
- ✓ Standard
- ★ Optional

SPREAD THE WARMTH

ZONE HEATING WITH REGENCY

Add a fireplace to your most frequently used living space and save energy by only heating rooms you use.

HEAT ADJACENT ROOMS WITH THE HEAT WAVE™ - POWER DUCT SYSTEM

Cut down on your heating costs using a Heat Wave kit. The Heat Wave system attaches onto most Regency gas fireplaces, allowing you to direct heat into rooms up to 20 feet away. This kit comes complete with vent, variable speed blower (for HeatWave system only), and vent register.

OPTIONS

REGENCY REMOTES AND THERMOSTATS

Create optimal comfort with ease and convenience at the touch of a button with the Regency comfort control system. Our **user friendly programmable controls** can be set, adjusted and programmed for your fireplace to come on at the temperature you want, when you want it. Regency control systems are available with a variety of features to suit your home heating needs.



Proflame I & II GTMF
Remote Control



Programmable
Thermostat

FEATURE	DESCRIPTION	PROFLAME REMOTE		PROGRAMMABLE THERMOSTAT
		GTMF	GTMFS	
On/Off		✓	✓	✓
Child lock		✓	✓	•
LCD backlit screen		✓	✓	✓
Clock		•	•	✓
Temperature display	°F / °C	✓	✓	✓
Thermostat	one setting (all days)	✓	✓	✓
	5-day weekday & 2-day weekend	•	•	✓
Smart thermostat*		✓	✓	•
Flame adjustment	(6 levels)	✓	✓	•
Split flow burner control	(back burner on/off)	•	✓	•
Fan control**	(6 levels)	✓	✓	•
Accent light (On/Off)***		✓	✓	•

- Not available
- ✓ Standard

* Smart thermostat - Rather than a thermostat that simply turns your fireplace on and off, the Smart Control function allows you to set your desired room temperature. As the room reaches your personal setting, the flame intensity and heat gradually decrease - keeping the ambience of your Regency fire on with less heat output and the option to turn it off at any time.


** For models that have a blower.

*** For models that have an optional accent light.

MAXIMIZING COMFORT AND EFFICIENCY

Regency fireplaces deliver controllable heating solutions by combining the latest in radiant/convection heat technology and innovative features:

- Adjustable flame/heat control
- Heat radiating ceramic glass for maximum radiant heat
- SureFire electronic ignition switch with battery backup features fuel saving intermittent pilot ignition that conserves energy when not in use
- **Power's Out, Heat's On.** All Regency gas fireplaces operate safely without electricity. Never worry about being cold during a power outage again and stay warm all winter long with Regency.

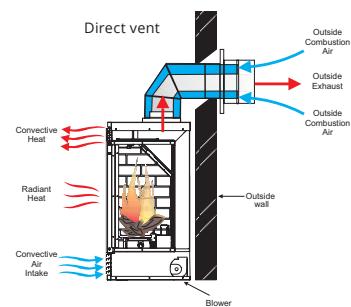

DESIGN VERSATILITY



AstroCap (front)




AstroCap (back)

You can enjoy the convenience of a gas fireplace anywhere in your home with a Regency direct vent fireplace. Regency direct vent fireplaces maintain indoor air quality by drawing fresh combustion air from outside through our specialized venting system into a sealed firebox and sending the used air back outdoors. Direct vent technology allows you to add a fireplace to rooms with no existing chimney. Simply vent your fireplace through an outside wall and finish it with the patented **Regency astroCap flex venting system** (11" x 11" 7-1/2" deep including mounting flange).

SPECIFICATIONS


DIMENSIONS	U1500E	U900E
Flue size	5" x 8"	4" x 6-5/8"
A	49-11/16"	39-3/8"
B	45-1/4"	35"
C	13-1/2"	13-1/16"
D	48"	37-3/4"
E	32-5/8"	31-5/16"
F	22-1/16"	21-13/16"
G	18-1/16"	17-11/16"
H	6-3/16"	6-5/16"
I	1-1/2"	1-1/2"
J	9-7/8"	10-7/8"
K	29-1/16"	28-9/16"
L	23-15/16"	23-5/16"
M	16-1/4"	15-3/4"

REGENCY ULTIMATE™ U1500E/U900E

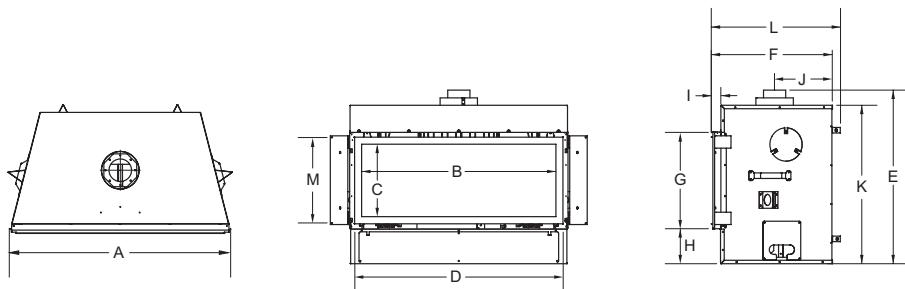


DIMENSIONS	HZ54E	HZ40E
Flue size	5" x 8"	4" x 6-5/8"
A	59"	49-5/16"
B	52-5/8"	45-5/8"
C	31-5/8"	33-3/16"
D	48-3/4"	38-1/4"
E	35-1/4"	31"
F	18-3/8"	18-5/16"
G	22-3/8"	16-7/8"
H	5-11/16"	10"
I	3-1/8"	3-1/4"

REGENCY HORIZON® HZ54E

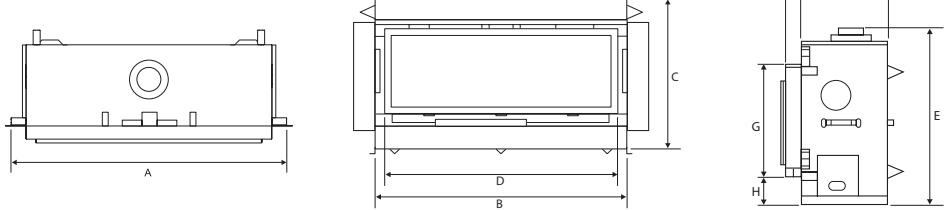

REGENCY HORIZON® HZ40E

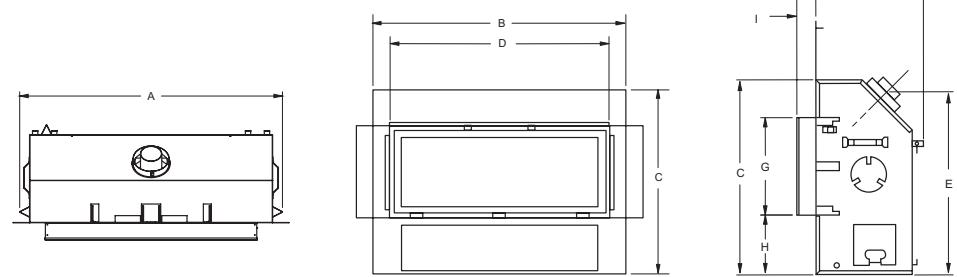


SPECIFICATIONS


FRAMING		U1500E	U900E	HZ54E	HZ40E
A		47"	42-1/4"	46-5/8"	42"
B		55"	45"	60"	49-7/8"
C	horizontal vent	24-1/4"	22-3/4"	23-3/4"	21-3/16"
	vertical vent	24-1/4"	22-3/4"	23-3/4"	25-3/16"
D	flex	69-1/2"	52-1/4"	51"	43-7/8"
	rigid	69-1/2"	52-1/4"	51"	43-7/8"
E		65-3/4"	51-1/2"	69"	61"
F		93"	72-1/2"	97-9/16"	86-1/4"

If using optional steel stud kit refer to manual for details


REGENCY ULTIMATE™ U1500E/U900E & REGENCY HORIZON® HZ54E/HZ40E

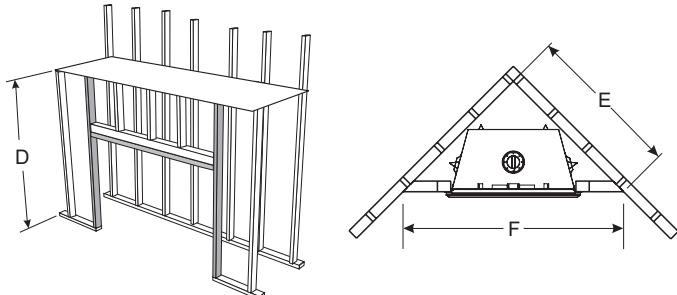

REGENCY ULTIMATE™ U1500E/U900E

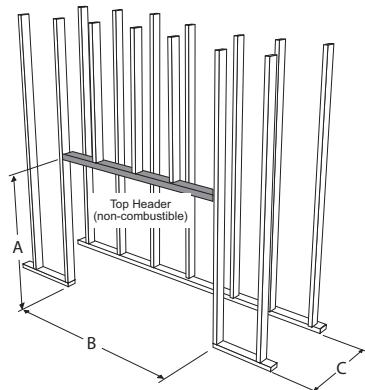


REGENCY HORIZON® HZ54E

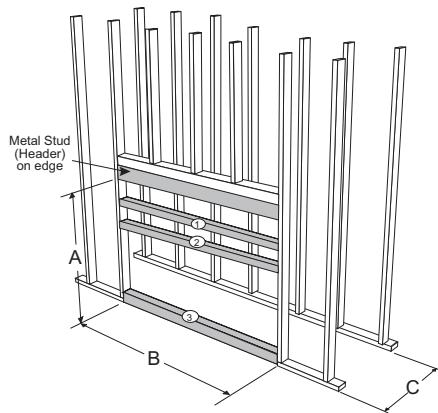

Note: Three horizontal steel studs must be installed after the unit is in position and the venting, gas and electrical is installed. The horizontal studs allow the non-combustible wall board to be attached and supported.

REGENCY HORIZON® HZ40E

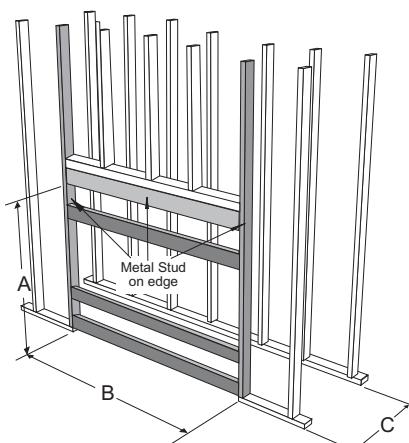

NOTE: All products can be installed in a raised application. Before installing, refer to the relevant product manual for full and up-to-date information. Manuals can be downloaded from our website www.regency-fire.com

SPECIFICATIONS



CLEARANCES	U1500E	U900E	HZ54E	HZ40E
A* (Min.)	25"	20"	20"	17"
B	6"	8"	4"	8"
C	46-1/4"	48"	40-7/8"	22"
D** (Max.)	12"	12"	13"	13"
E	60"	84"	83"	84"
F	36"	36"	36"	36"
G	24-1/4"	24"	28-7/8"	27"

* Minimum at 1" deep

** HZ30E - Minimum at 21-1/4" above

HZ42STE - Minimum at 21-1/2" above

HZ54E - Minimum at 30" above

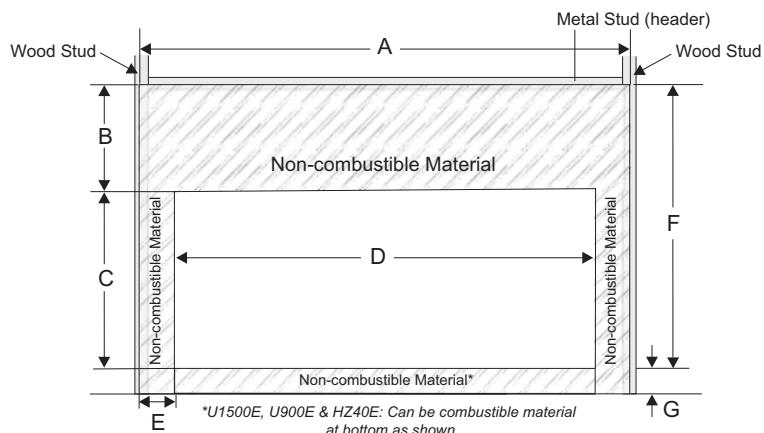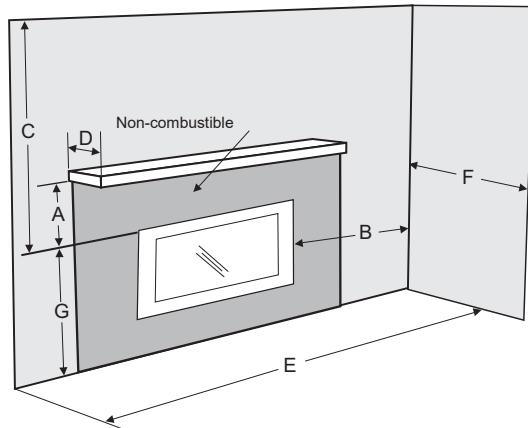

NON-COMBUSTIBLE REQUIREMENTS

	U1500E	U900E	HZ54E	HZ40E
A	56-1/2"	46-1/2"	60-1/2"	51-5/16"
B	23-7/8"	20"	19-7/8"	20"
C	18-1/8"	17-3/4"	22-1/2"	13-13/16"
D	50"	39-7/8"	52-7/8"	39-7/8"
E	3-1/4"	3-7/16"	3-7/8"	5-11/16"
F	42-1/8"	37-3/4"	42-3/8"	33-13/16"
G	6-3/16"	6-1/8"	5-1/2"	10"

NOTE: All products can be installed in a raised application. Before installing, refer to the relevant product manual for full and up-to-date information. Manuals can be downloaded from our website www.regency-fire.com

SPECIFICATIONS

SURROUND DIMENSIONS		A	B	C	D
U1500E	Finishing trim	50-3/4"	19"	n/a	n/a
	Inner and outer frame	53-1/2"	21-3/4"	45-1/4"	13-1/2"
	Verona glass with inner frame	57-1/2"	25-3/4"	49-1/2"	17-3/4"
U900E	Finishing trim	40-1/8"	18-3/8"	39"	17-3/16"
	Inner and outer frame	43-1/16"	20-9/16"	35"	13"
	Verona glass	47"	25-1/4"	38-7/8"	17-1/4"
HZ54E	Verona 54 - glass/metal	58-9/16"	27-1/8"	50-3/4"	19-1/8"
	Inner and outer frame	56-11/16"	25-1/8"	45-3/16"	13-5/8"
HZ40E	Verona 40 - glass/metal	44"	20-7/8"	36"	12-7/8"
	Inner and outer frame	43-1/16"	20-9/16"	35-1/2"	12-1/2"

METAL

GLASS

FINISHING TRIM

Available for models:
U1500E & U900E

INNER & OUTER FRAME





Available for models:
HZ40E, HZ54E,
U1500E & U900E

VERONA

Available for models:
HZ40E

VERONA

Available for models:
HZ54E, U1500E
& U900E





NOTE: All products can be installed in a raised application. Before installing, refer to the relevant product manual for full and up-to-date information.
Manuals can be downloaded from our website www.regency-fire.com



SPECIFICATIONS

INSTALLATION OPTIONS (G800C, G600C)


Non-Combustible Finishing Install

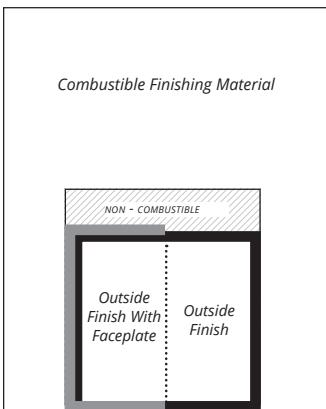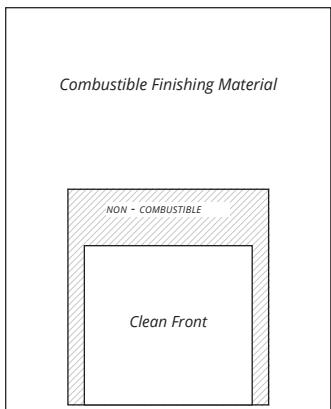


Combustible Finishing Install with Cool Wall

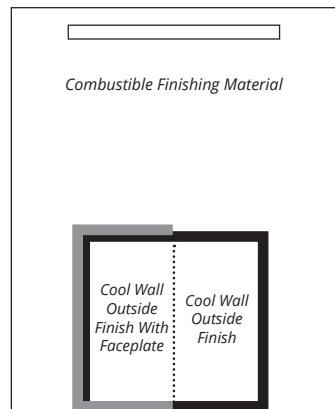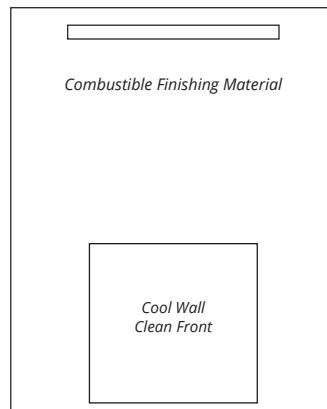

DIMENSIONS - G800C

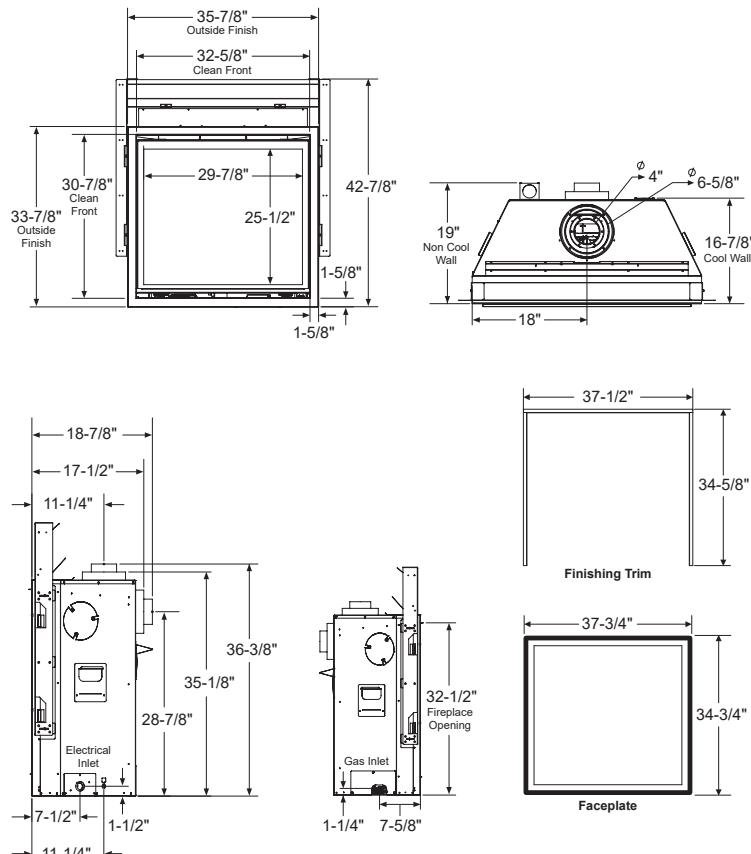

FRAMING - G800C

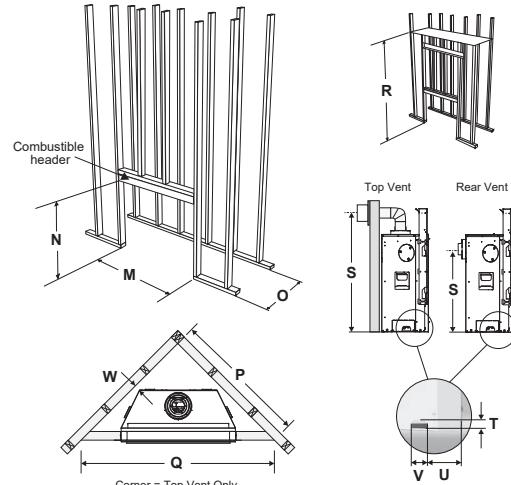

IMPORTANT: Corner applications are vented from the top only - rear venting cannot be used.

FRAMING		COOL WALL	CLEAN FRONT	OUTSIDE FINISH
M	Framing Width	36-1/2"	37-1/2"	36-1/2"
N*	Framing Height	43"	43"	43"
O	Framing Depth	16-7/8"	19-1/4"**	19-1/4"**
P	Corner Facing Wall Width	42-1/2"	46-1/2"	46-1/2"**
Q	Corner Facing Wall Width	60"	65-3/4"	65-3/4"
R	Framed Chase Ceiling Enclosure	80"	62"	62"
S	Vent Centerline Height - Rear	29"	29"	29"
S	Vent Centerline Height - Top	44"	44"	44"
T	Gas Connection Height	1-1/2"	1-1/2"	1-1/2"
U	Gas Connection Inset	6-3/8"	6-3/8"	6-3/8"
V	Gas Connection Width	3"	3"	3"
W	Clearance to Corner of Unit	2-3/4"	2-3/4"	2-3/4"
Non-combustible Material Required Above Appliance		--	11-1/2"	10"


* Important: Framing height requires consideration of the hearth depth. Dimension N = N + the thickness of the installed hearth.

** Top Vent Only

NOTE: For full latest up to date installation and clearances details, please always refer to the manual.


SPECIFICATIONS

DIMENSIONS - G600C

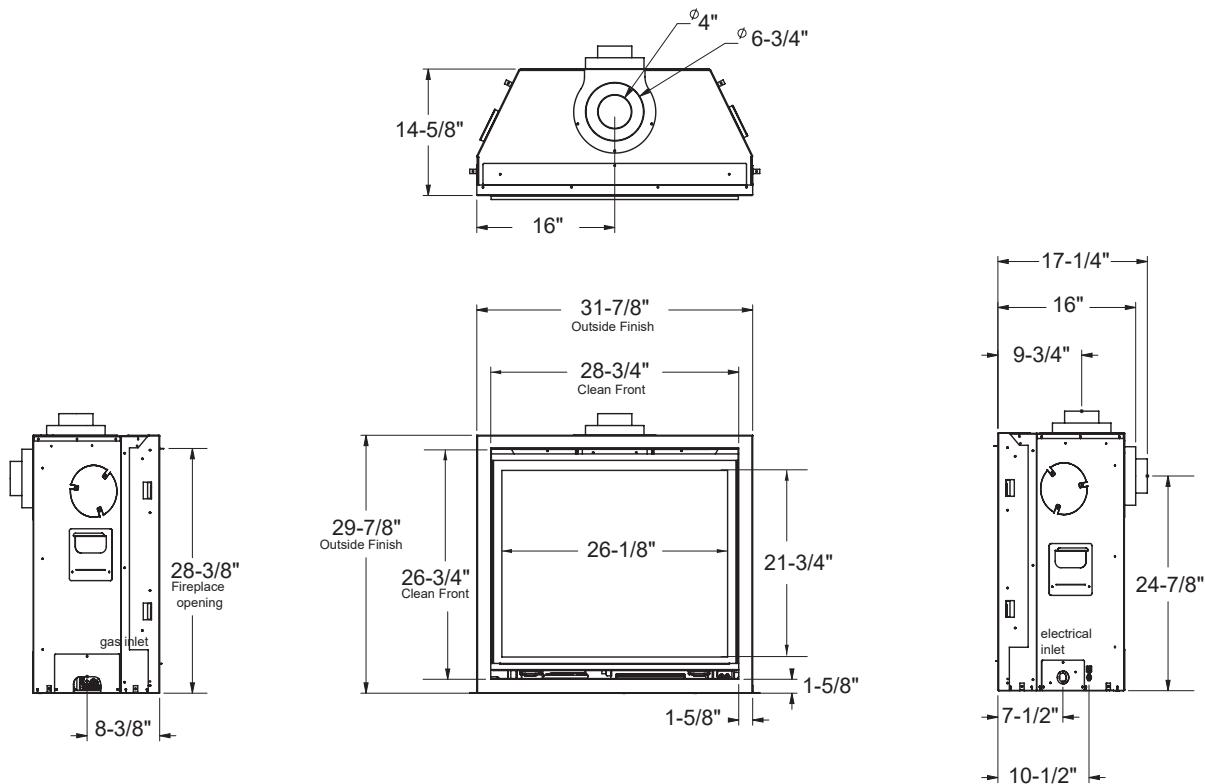

NOTE: For full latest up to date installation and clearances details, please always refer to the manual.

FRAMING - G600C

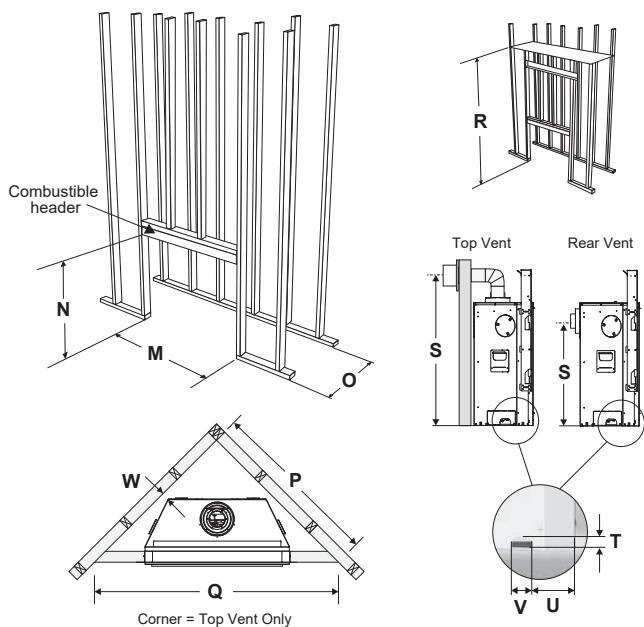


FRAMING	COOL WALL	CLEAN FRONT	OUTSIDE FINISH
M Framing Width	33-1/2"	33-1/2"	33-1/2"
N* Framing Height	40"	40"	40"
O Framing Depth	15"	16-3/4"	16-3/4"
P Corner Facing Wall Width	37-1/4"	40"**	40"**
Q Corner Facing Wall Width	52-1/2"	57"**	57"**
R Framed Chase Ceiling Enclosure - Rear	74-1/2"	43-1/2"	43-1/2"
R Framed Chase Ceiling Enclosure - Top	74-1/2"	60"	60"
S Vent Centerline Height - Rear	25"	25"	25"
S Vent Centerline Height - Top	39-1/2"	39-1/2"	39-1/2"
T Gas Connection Height	1-7/8"	1-7/8"	1-7/8"
U Gas Connection Inset	8-3/8"	8-3/8"	8-3/8"
V Gas Connection Width	3-1/2"	3-1/2"	3-1/2"
W Clearance to Corner of Unit	1/2"	2"	2"
Non-combustible Material Required Above Appliance	no	yes	yes

* Important: Framing height requires consideration of the hearth depth. Dimension N = N + the thickness of the installed hearth.

** Top Vent Only



Find More Products at **REGENCY-FIRE.COM**



©2025 FPI Fireplace Products International Ltd. Regency®, Regency Ultimate™, Regency Horizon®, SureFire™, HeatWave™, HeatRelease™, AstroCap®, are registered or proprietary trademarks of FPI Fireplace Products International Ltd. All rights reserved.
Printed in Canada (01/25) Part no. 944-286

Version No: 2025-1

Your Regency Dealer



TRADITIONAL GAS FIREPLACES



regency-fire.com

WHY CHOOSE REGENCY?

For the past 40+ years Regency has been focused on creating innovative, high-quality, and reliable products that reduce heating costs and add true value to your home. We design all our products to be durable and last a lifetime so that our customers can enjoy them for years to come.

HIGH-QUALITY

Producing a high-quality product has been at the very heart of what we do from when that very first stove rolled off the production line over 40 years ago to today. We are ever-focused on producing quality products for our customers that will last for years to come.

BEST WARRANTY

A fireplace should be reliable and should work right the first time it is used, and the 1,000th. A core part of our business is making sure that we are building long-lasting, durable, high-quality products; we back-up that commitment with the industry's best warranty on all our products.

COST-EFFICIENT

Never before have home heating costs been higher. Turn your furnace way down and zone heat with our beautiful, reliable and convenient Regency products. Not only can you cut your fuel bills in half, but you'll be able to enjoy the timeless comfort of a Regency fire.

Why Regency? Because it's **more** than a fireplace!



TABLE OF CONTENTS

Regency Grandview™ Gas Fireplaces

G1200P	06
G800P	08
G800EC, G800C, G800EH, G600EC, G600C	10

Regency Bellavista® Gas Fireplaces

B36XTCE, B36XTE	12
B41XTCE, B41XTE	14

Regency Panorama® Gas Fireplaces

P36, P36E, P36D	16
P33, P33E, P33CE	18

Regency Excalibur® Gas Fireplace

P90E	20
-------------	-----------

Design Choices & Options	22
-------------------------------------	-----------

Specifications	26
-----------------------	-----------





THE GRANDVIEW SERIES

G800P shown with birch log set, herringbone brick panels in black and clean finish install.

One Fireplace, Unlimited Possibilities


Ignite your imagination with the Regency Grandview™ traditional gas fireplace, offering over 960 design combinations and versatile installation options. Choose a classic setup or opt for our Regency Patented Cool Wall System, which allows safe mounting of art or a TV above the unit while reducing costs and enabling the use of nearly any material right to the edge. With endless styling possibilities and innovative features, the Grandview™ series brings your vision to life with unmatched flexibility.

COOL WALL SYSTEM ADVANTAGES

- Place a TV above the fireplace without it getting damaged
- Hang artwork without fear of warping
- Paint will not discolor, drywall will not crack
- No internal fans required
- Use any finish right to the edge of the fire, even wood or wallpaper

OPTIONS & ACCESSORIES FOR GRANDVIEW


CHOOSE YOUR LOOK

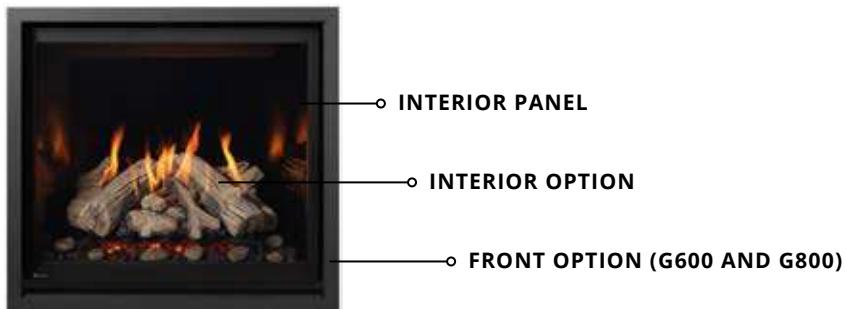

MULTIPLE INTERIOR PANELS



Rustic Brown
Brick Panels




Herringbone - Black
or Rustic Brown
Brick Panels



Volcanic Black
Brick Panels



Castlestone Grey
(available for G600 &
G800 series only)



Painted Black
Steel Panels



Black Enamel or Black
Glass Reflective Panels

MULTIPLE INTERIOR OPTIONS



Birch Log Set



Oak Log Set



Driftwood Log Set

Available for G600 & G800 Series Only



Crushed Glass -
Ginger



Crushed Glass -
Coal Black



Crushed Glass -
Iceberg



Volcanic Stones

MULTIPLE FRONT OPTIONS (Available for G600 & G800 Series Only)



Clean Front
Finishing Trim



Outside
Finishing Trim



Faceplate



REGENCY GRANDVIEW™ - G1200P

Extra Large Premium Gas Fireplace



G1200P shown with Oak log set and herringbone brick panels in rustic brown.



Oak log set with herringbone brick panels



Birch logs with volcanic black brick panels



Driftwood logs, volcanic stones and reflective black glass panels

EXTRA LARGE FLAME PICTURE

Introducing the Regency Grandview™ G1200P — our biggest and most innovative Grandview gas fireplace yet. With cutting-edge Infusion Burner Technology, an impressive panoramic viewing area, and a versatile range of accessories, the G1200P is designed to deliver the ultimate in style, performance, and personalization.

SPECIFICATIONS	NATURAL GAS	PROPANE
Max. Input (BTU)	53,000	53,000
Turn down to (BTU)	13,500	13,500
Efficiency (steady state)	72.58%	74.08%
EnerGuide Rating (Canada only)	66.58%	67.96%

DIMENSIONS	
Viewing Area	1200 sq. in.
Width	55"
Height	42-3/4"
Depth	28-7/8"

For detailed specifications please see page 26.



G1200P shown with Birch logs and volcanic black brick panels.

STANDARD FEATURES

- NEW innovative split flow infusion burner that creates the most realistic flame package
- Largest viewing area in its class
- Standard top down and ember-bed lighting
- Integrated Invisimesh safety screen
- Cool Wall system to allow for flexible finishing options
- Flame height adjustment control
- Electronic ignition with Proflame II GTMF remote control
- Natural gas or propane
- Limited lifetime warranty

OPTIONS

- Multiple log set choices: oak, birch or driftwood
- Interior panels in Rustic Brown, Volcanic Black, and Herringbone
- Finishing trims for easy finishing around the fireplace
- Variable speed blower (Non-combustible finishing install only)
- Chase vent (cool wall installations)
- Outdoor Installation kit
- Propane conversion kit
- Power vent kit
- Wi-Fi Kit provides the ultimate fireplace control from your smart phone

REGENCY GRANDVIEW™ - G800P

Medium Premium Gas Fireplace



G800P shown with Oak log set, rustic brown brick panels and clean finish install.



Birch log set with herringbone brick panels in black



Oak log set with reflective glass black panels



Oak log set, rustic brown brick panels and four sided faceplate in black

PERSONALIZED WARMTH

Transform your living space with the Regency Grandview™ G800P — the perfect blend of style, comfort, and personalization. With its expansive view, customizable accessories, and beautifully crafted flame, this fireplace creates a cozy, welcoming atmosphere that feels uniquely yours.

SPECIFICATIONS	NATURAL GAS	PROPANE
Max. Input (BTU)	36,000	34,000
Turn down to (BTU)	19,500	27,000
Efficiency (steady state)	65.20%	68.16%
EnerGuide Rating (Canada only)	58.73%	58.89%

DIMENSIONS	
Viewing Area	800 sq. in.
Width	35-7/8"
Height	33-7/8"
Depth	18-5/8"

For detailed specifications please see page 26.



G800P shown with Driftwood log set, reflective glass black panels and four sided black faceplate. Installed on a covered patio using the outdoor installation kit.

STANDARD FEATURES

- NEW patent pending infusion burner that creates the most realistic flame package
- Clean front design
- Standard top down and ember-bed lighting
- Integrated Invismesh safety screen
- Ceramic glass
- Flame height adjustment control
- Proflame II GTMF remote control
- Electronic ignition
- Natural gas
- Limited lifetime warranty

OPTIONS

- Cool Wall system to allow for any finishing material right to the edge of the fireplace
- Brick panels in a variety of colors and designs
- Inner reflective panels in black glass
- Surrounds in various colors
- Finishing trims for easy finishing around the fireplace
- Variable speed blower
- Chase vent (cool wall installations)
- Outdoor Installation kit
- Propane conversion kit
- Power vent kit
- AstroCap® venting system
- Wi-Fi Kit

REGENCY GRANDVIEW™

G800EC • G800C • G800EH • G600EC • G600C

Medium & Small Gas Fireplaces



G800EC shown with birch log set and volcanic black brick panels.



Oak log set and rustic brown brick panels



Oak log set and castlestone brick panels



Birch log set, herringbone brick panels and black faceplate

REFINED AMBIANCE

Select your breathtaking flame picture and accessories to craft a truly unique fireplace. With our patented Cool Wall technology, create the perfect look for your home with our pick and choose accessory options.

SPECIFICATIONS	G800EC		G800C		G800EH		G600EC		G600C	
	NATURAL GAS	PROPANE								
Input (BTU)	27,000	25,500	27,000	26,500	36,000	34,000	21,000	20,500	21,000	20,500
Turn down to (BTU)	15,000	21,000	15,000	14,500	19,500	27,000	11,500	16,500	11,500	11,000
Efficiency (steady state)	65.20%	68.16%	61.12%	63.62%	65.20%	68.16%	71.17%	72.80%	71.18%	72.71%
EnerGuide Rating (Canada only)	55.96%	57.74%	55.96%	55.03%	58.73%	57.94%	64.80%	67.22%	64.79%	66.76%

DIMENSIONS	VIEWING AREA	WIDTH	HEIGHT	DEPTH
G800 series	800 sq. in.	35-7/8"	33-7/8"	16-7/8"
G600 series	600 sq. in.	31-7/8"	29-7/8"	14-5/8"

For detailed specifications please see page 26.



G600C shown with coal black crushed glass and painted black steel panels installed with a clean front finish using the cool wall system and chase vent.



Ginger crushed glass and antique copper faceplate



Iceberg crushed glass, volcanic stones and brushed nickel faceplate



Driftwood log set and black steel panels

STANDARD FEATURES

- Clean front design
- Top down and ember-bed lighting (G800EC, G800EH, G600EC)
- Integrated safety screen
- Ceramic glass
- Flame height adjustment control
- Standing Pilot (Direct Spark Ignition - G800C, G600C)
- Proflame II GTMF remote control (G800EC, G800EH, G600EC)
- Electronic ignition (G800EC, G800EH, G600EC)
- Rear or top vent for versatile installations
- Natural gas
- Limited lifetime warranty

OPTIONS

- Choose from a log grate and traditional style log package or contemporary crystal tray
- Cool Wall system to allow for any finishing material right to the edge of the fireplace
- Brick panels in a variety of colors and designs
- Inner reflective panels in black enamel
- Inner painted black steel panels
- Surrounds in various colors
- Finishing trims for easy finishing around the fireplace
- Variable speed blower
- Chase vent (cool wall installations)
- Outdoor Installation kit
- Propane conversion kit
- ON/OFF remote control (G800C, G600C)
- AstroCap® venting system
- Heat Wave™ power duct kit (G800C, G800EC, G800EH)
- Wi-Fi Kit

REGENCY BELLAVISTA® - B36XTCE • B36XTE

Medium Gas Fireplaces



B36XTCE shown with rustic brown brick panels and integrated safety screen.

BOLD STYLE

The B36 Bellevista® combines bold style with reliable performance. Its flush-fit design and edge-to-edge trim options create a clean, modern look. Enjoy up to 31,000 BTUs of heat through ceramic glass, with a 625 sq. in. viewing area that highlights stunning flames and realistic log packages. Built with premium craftsmanship, this fireplace offers easy customization with a variety of accessories—making it a perfect fit for any space.

SPECIFICATIONS	B36XTCE		B36XTE	
	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE
Input (BTU)	31,000	31,000	31,000	31,000
Turn down to (BTU)	21,500	25,000	21,500	25,000
Efficiency (steady state)	70.56%	71.08%	70.56%	71.08%
EnerGuide Rating (Canada only)	65.90%	65.90%	65.90%	65.90%

DIMENSIONS	B36XTCE	B36XTE
Viewing Area	652 sq. in.	652 sq. in.
Width	40-5/8"	36"
Height	38-1/16"	35-1/4"
Depth	23-5/8"	20-7/16"

For detailed specifications please see page 32.



B36XTE shown with Vignette faceplate in platinum, rustic brown brick panels and integrated safety screen.

STANDARD FEATURES

- Natural gas
- Safety screen
- Ceramic glass
- Log set with embers
- Fire grate
- Flame height adjustment control
- Proflame I GTMF remote control
- Electronic ignition with SureFire™ switch
- Top or rear vent for versatile installations
- Limited lifetime warranty

OPTIONS

- Brick panels in a variety of colors and designs
- Inner reflective panels in black enamel
- Vignette surrounds in various colors (B36XTE only)
- Vignette door inlays (B36XTE only)
- Vignette finishing trim (B36XTE only)
- Ember upgrade kit
- Wall thermostat
- Variable speed blower
- Vertical or horizontal vent terminations
- AstroCap® venting system
- Propane conversion kit

REGENCY BELLAVISTA® - B41XTCE • B41XTE

Large Gas Fireplaces



B41XTCE shown with old town red brick panels and integrated safety screen.

EXPANSIVE VIEWING AREA

The B41 Bellevista® brings elegance and powerful performance to medium and large spaces. Choose the B41XTCE for a sleek, frameless look or the B41XTE for edge-to-edge trim options that suit any style. A wide viewing area showcases vibrant flames and detailed log sets, delivering up to 42,500 BTUs of comforting heat through safety-tested ceramic glass. With premium craftsmanship and customizable accessories, the B41 Bellevista® is a stunning, versatile centerpiece for any room.

SPECIFICATIONS	B41XTCE		B41XTE	
	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE
Input (BTU)	42,500	37,500	42,500	37,500
Turn down to (BTU)	30,000	29,500	30,000	29,500
Efficiency (steady state)	70.56%	71.08%	72.76%	72.63%
EnerGuide Rating (Canada only)	65.90%	65.90%	68.15%	68.35%

DIMENSIONS	B41XTCE	B41XTE
Viewing Area	840 sq. in.	840 sq. in.
Width	40-5/8"	41-11/16"
Height	36-3/8"	36-11/16"
Depth	25-9/16"	22-3/8"

For detailed specifications please see page 32.



B41XTE shown with Vignette faceplate in Tuscan Sunset, rustic brown brick panels and integrated safety screen.

STANDARD FEATURES

- Natural gas or propane
- Safety screen
- Ceramic glass
- Log set with embers
- Fire grate
- Flame height adjustment control
- Proflame I GTMF remote control
- Electronic ignition with SureFire™ switch
- Top or rear vent for versatile installations
- Limited lifetime warranty

OPTIONS

- Brick panels in a variety of colors and designs
- Inner reflective panels in black enamel
- Vignette surrounds in various colors (B41XTE only)
- Vignette door inlays (B41XTE only)
- Vignette finishing trim (B41XTE only)
- Ember upgrade kit
- Wall thermostat
- Variable speed blower
- Vertical or horizontal vent terminations
- AstroCap® venting system

REGENCY PANORAMA® - P36 • P36E • P36D

Medium Gas Fireplaces



P36 shown with Vignette faceplate in black, Vignette finishing trim, rustic brown brick panels and integrated safety screen.



Black Louvers and Herringbone brick panels



Vignette faceplate in Tuscan Sunset and Herringbone brick panels



Vignette faceplate in Platinum and rustic brown brick panels

VERSATILE STYLE

Available in slim or deep box designs, the P36 Panorama® offers versatile style and efficient performance. Ideal for family rooms, dens, or bedrooms, it provides reliable warmth and a cozy atmosphere. With its clean design and customizable features, the P36 is a perfect blend of comfort and elegance for any space in your home.

SPECIFICATIONS	P36		P36E		P36D	
	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE
Input (BTU)	30,000	30,000	29,500	28,500	30,000	30,000
Turn down to (BTU)	15,500	15,500	19,500	22,000	15,500	15,500
Efficiency (steady state)	70.55%	70.55%	72.88%	74.40%	71.26%	71.26%
EnerGuide Rating (Canada only)	n/a	n/a	66.86%	67.44%	n/a	n/a

DIMENSIONS	
Viewing Area	451 sq. in.
Width	36"
Height	30-1/2"
Depth	P36/P36E - 12-3/4" P36D - 17-1/8"

For detailed specifications please see page 31.



P36 shown with Vignette faceplate in black, Vignette finishing trim, rustic brown brick panels and integrated safety screen.



Vignette Faceplate in Black, Vignette Door Inlay in Black and Herringbone brick panels



Vignette Faceplate in Black, Vignette Door Inlay in Black Chrome and rustic brown brick panels



Vignette Faceplate in Black, Vignette Door Inlay in Tuscan Sunset and Herringbone brick panels

STANDARD FEATURES

- Natural gas
- Safety screen
- Ceramic glass
- Log set with embers
- Fire grate
- Flame height adjustment control
- Proflame GTMF remote control
- Electronic ignition (P36E)
- Standing Pilot (Direct spark ignition - P36/P36D, available in USA only)
- Limited lifetime warranty

OPTIONS

- Vignette surrounds in various colors
- Vignette door inlays
- Vignette finishing trim
- Brick panels in a variety of colors and designs
- Inner reflective panels in black enamel
- Ember upgrade kit
- Black louvers & mesh guard
- Variable speed blower
- Wall thermostat
- Propane conversion kit
- Vertical or horizontal vent terminations
- Heat Wave™ power duct kit
- AstroCap® venting system

REGENCY PANORAMA® - P33 • P33E • P33CE

Small Gas Fireplaces



P33 shown with Vignette faceplate in black, Vignette finishing trim, Vignette door inlay in black, rustic brown brick panels and integrated safety screen.



P33/P33E Black Louvers and Herringbone brick panels



P33/P33E - Vignette Faceplate in Tuscan Sunset and Herringbone brick panels



P33/P33E - Vignette Faceplate in Platinum and rustic brown brick panels

COMPACT DESIGN

The P33 Panorama® offers a true flush finish for an unobstructed view of its bold, dynamic flames—perfect for small to medium-sized spaces. This fireplace is a complete visual experience, featuring a hand-crafted ceramic log set and glowing embers. With its seamless design and radiant ambiance, the P33 becomes an inviting centerpiece in any room.

SPECIFICATIONS	P33		P33E		P33CE	
	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE
Input (BTU)	20,000	19,500	20,000	19,500	20,000	19,500
Turn down to (BTU)	14,000	15,500	14,000	15,500	14,000	15,500
Efficiency (steady state)	72.57%	74.06%	68.28%	73.82%	68.28%	73.82%
EnerGuide Rating (Canada only)	n/a	n/a	66.49%	69.44%	66.49%	69.44%

DIMENSIONS	
Viewing Area	416 sq.in.
Width	33"
Height	P33/P33E - 29" P33CE - 29-1/4"
Depth	P33/P33E - 12-3/4" P33CE - 16"

For detailed specifications please see page 31.



P33CE shown with oak log set.



P33 - Vignette Faceplate in Black, Vignette Door Inlay in Black and rustic brown brick panels



P33CE - Oak log set and herringbone brick panels



P33CE - Birch log set and Inner black enamel reflective panels

STANDARD FEATURES

- Natural gas
- Safety screen
- Ceramic glass
- Log set with embers
- Fire grate
- Flame height adjustment control
- Proflame I GTMF remote control
- Direct spark ignition (P33, available in USA only)
- Electronic ignition (P33E/P33CE)
- 45° flue for versatile installations
- Limited lifetime warranty

OPTIONS

- Vignette surrounds in various colors (P33/P33E)
- Vignette door inlays (P33/P33E)
- Vignette finishing trim (P33/P33E)
- Black louvers (P33/P33E)
- Brick panels in various colors and designs
- Inner reflective panels in black enamel
- Ember upgrade kit
- Wall thermostat
- Variable speed blower
- Vertical or horizontal vent terminations
- Propane conversion kit
- Heat Wave™ power duct kit
- AstroCap® venting system
- 3-sided finishing trim (when using black louvers - (P33/P33E)

REGENCY EXCALIBUR® P90E

Medium Gas Fireplace



P90E shown with herringbone brick panels and double door inlay with integrated safety screen.

TIMELESS ARCH DESIGN

The Regency Excalibur® P90E features a graceful arched design that frames radiant flames with timeless elegance. Its glowing embers and hand-crafted split logs create the look and feel of a real wood-burning fire. With over 40 customization options, you can tailor every detail to match your style—making the P90E a truly personal and luxurious fireplace experience.

STANDARD FEATURES

- Natural gas
- Ceramic glass
- Log set with embers
- Fire grate
- Black brick panel floor
- Variable speed blower
- Proflame II GTMF remote control
- Electronic Ignition
- Flame height adjustment control
- Limited lifetime warranty

OPTIONS

- Arch surround in black with integrated safety screen
- Brick panels in various colors and designs
- Double door inlay
- Wall thermostat
- Propane conversion kit
- Heat Wave™ power duct kit
- AstroCap® venting system
- Steel stud framing kit

SPECIFICATIONS

	NATURAL GAS	PROPANE
Input (BTU)	35,000	31,500
Turn down to (BTU)	23,500	25,500
Efficiency (steady state)	76.07%	76.07%
EnerGuide Rating (Canada only)	71.36%	72.79%

DIMENSIONS

Viewing Area	455 sq. in.
Width	37"
Height	29-1/4"
Depth	19-1/4"

For detailed specifications please see page 31.

FIREPLACE OPTIONS

MAXIMIZING COMFORT AND EFFICIENCY

Regency fireplaces deliver controllable heating solutions by combining the latest in radiant/convection heat technology and innovative features:


- Adjustable flame/heat control.
- Heat radiating ceramic glass.
- **Intelligent Ignition System** features fuel-saving intermittent pilot ignition (IPI), 7-day continuous pilot mode (CPI), and 5 second **Flame Failure Response Time (FFRT)** for more reliable startups - even in cold weather (Electronic Ignition Models Only).
- Power's Out, Heat's On. All Regency gas fireplaces operate without electricity. Enjoy peace of mind all winter long.
- Variable speed blower to maximize efficiency. Our **quiet blowers** increase the efficiency of your fireplace by pushing the heat produced by your fireplace forward and distributing it throughout the room.
- **Proflame GTMF Remote Controls.** A standard feature included with most traditional gas fireplaces, this user friendly programmable remote can be set to start your Regency fire at your desired room temperature and be easily adjusted with the touch of a button.

COOL WALL SYSTEM

Our patented Cool Wall System utilizes natural convection and innovative design to maintain cool wall surface temperatures without any loss in efficiency or need for fans or additional ducting. The fireplace draws in cooler air from floor level, heating and then distributing the air both in front of the fireplace and at ceiling level, enabling total flexibility in finishing materials and placement of televisions and artwork.




NO CHIMNEY? NO PROBLEM!

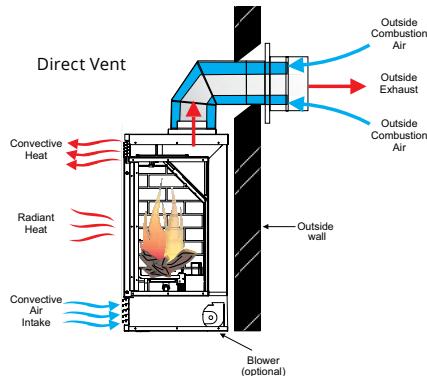

DIRECT VENT TECHNOLOGY allows you to add a fireplace to rooms with no existing chimney. Simply vent your fireplace through an outside wall and finish it with the patented **Regency AstroCap Flex Venting System**. Direct Vent fireplaces are airtight systems that use outside air for combustion, helping maintain indoor air quality and keeping all the warmth generated from your fireplace inside your home. Even when the fireplace is turned off, the sealed system will prevent cold air from entering the home and warm air from leaving. Direct Vent fireplaces allow versatility in **installation and increase fireplace efficiency**.

SPREAD THE WARMTH

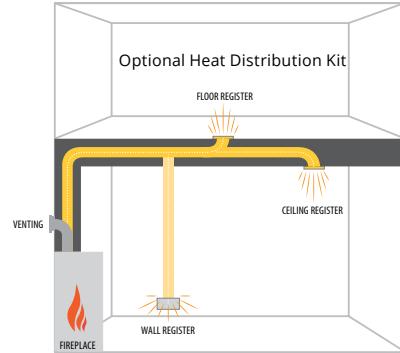

ZONE HEATING WITH REGENCY: Add a fireplace to your most frequently used living space and save energy by only heating rooms you use.

HEAT ADJACENT ROOMS WITH THE HEAT WAVE™ - POWER DUCT SYSTEM: Cut down on your heating costs using a Heat Wave kit. The Heat Wave system attaches onto most Regency gas fireplaces allowing you to direct heat into rooms up to 20 feet away. This kit comes complete with vent, variable speed blower (for Heat Wave system only) and vent register.

DESIGN OPTIONS

UNIT SIZE COMPARISON



P33CE



P33/P33E



P36/P36E/P36D



G600EC/G600C



G800EC/G800C



G800P



B36XTCE



B36XTE



B41XTCE



B41XTE



G1200P

DESIGN OPTIONS

INNER PANEL OPTIONS (NOT AVAILABLE ON ALL MODELS)



Herringbone -
Rustic Brown



Standard -
Rustic Brown



Standard -
Old Town Red



Standard - Charcoal



Castlestone Brown
(Available for B36 &
B41 Bellavista models)



Castlestone Grey
(Available for G600 &
G800 models)



Black Enamel Panels



Ember Upgrade Package

VIGNETTE FACEPLATE OR LOUVERED OPTIONS

FOR UNITS: P33, P33E, P36, P36E, P36D, B36XTE, B41XTE


VIGNETTE FACEPLATES & DOOR INLAY



Shown with black Vignette Faceplate,
Tuscan Sunset Door Inlay & Vignette finishing trim

1 Vignette Faceplate

2 Vignette Inlay



VIGNETTE FACEPLATES & INLAYS FINISHES



Black



Black Chrome



Platinum
(Not available for inlays)



Tuscan Sunset

LOUVERS



Black Louvers
For units: P33/P33E/P36/P36E/P36D



Flush Panels
For units: B36XTE/B41XTE

ACCESSORY OPTIONS

GRANDVIEW UNITS (G1200P, G800P, G800EC, G800EH, G800C, G600EC, G600C)

ACCESSORIES	G1200P ELECTRONIC IGNITION	G800P ELECTRONIC IGNITION	G800EC • G600EC ELECTRONIC IGNITION	G800EH ELECTRONIC IGNITION	G800C • G600C STANDING PILOT
Cool Wall Installation	★	★	★	★	★
Safety Screen	✓	✓	✓	✓	✓
Ceramic Glass	✓	✓	✓	✓	✓
Proflame II Remote Control	✓	✓	✓	•	•
On/Off Remote	•	•	•	•	★
Accent & Ember-bed Lights	✓	✓	✓	✓	•
Inner Panels	Black	★	★	★	★
	Standard - Volcanic Black	★	★	★	★
	Standard - Rustic Brown	★	★	★	★
	Castlestone	•	•	★	★
	Herringbone - Rustic Brown	★	★	★	★
	Herringbone - Black	★	★	★	★
	Black Enamel	•	★	★	★
	Black Glass	★	★	•	•
Faceplates	Black	•	★	★	★
	Brushed Nickel	•	★	★	★
	Antique Copper	•	★	★	★
Finishing Trims	Clean Front	★	★	★	★
	Outside Finish	•	•	★	★
Media	Driftwood Logs	★	★	★	★
	Birch Logs	★	★	★	★
	Oak Logs	★	★	★	★
	Crushed Glass (Various Colors)	•	•	★	★
Blower (with Fan Speed Control)	★	★	★	★	★
Outdoor Installation Kit	★	★	★	★	★
Power Vent Kit	★	★	★	★	★
WiFi Kit	★	★	•	•	•
Propane Conversion Kit	★	★	★	★	★

• Not available ✓ Standard ★ Optional

REMOTES & THERMOSTATS



Proflame I GTMF
Remote Control



Proflame II GTMF
Remote Control



Wall Mount



Programmable
Thermostat

FEATURE	DESCRIPTION	PROFLAME GTMF OR WALL MOUNT	PROGRAMMABLE THERMOSTAT
On/Off		✓	✓
Child lock		✓	•
LCD Backlit Screen		✓	✓
Clock		•	✓
Temperature display	°F / °C	✓	✓
	one setting (all days)	✓	✓
Thermostat	5-day weekday & 2-day weekend	•	✓
Smart thermostat*		✓	•
Flame adjustment	(6 levels)	✓	•
Fan control**	(6 levels)	✓	•
Accent light (On/Off)***		✓	•

* Smart Thermostat - Rather than a thermostat that simply turns your fireplace on and off, the Smart Control function allows you to set your desired room temperature. As the room reaches your personal setting the flame intensity and heat will gradually decrease - keeping the ambience of your Regency fire on with less heat output with the option to turn off at any time.

** For models that have a blower. *** For models that have an optional accent light.

ACCESSORY OPTIONS

ACCESSORIES - AT A GLANCE			B41XTCE	B41XTE	B36XTCE	B36XTE	P90E	P36/ P36D	P36E	P33CE	P33E	P33
Clean front	Glass		✓	•	✓	•	•	•	•	✓	•	•
Faceplates	Vignette	Black	•	★	•	★	•	★	★	•	★	★
		Black Chrome	•	★	•	★	•	★	★	•	★	★
		Platinum	•	★	•	★	•	★	★	•	★	★
		Tuscan Sunset	•	★	•	★	•	★	★	•	★	★
	Vignette Door Inlay	Black	•	★	•	★	•	★	★	•	★	★
		Black Chrome	•	★	•	★	•	★	★	•	★	★
		Tuscan Sunset	•	★	•	★	•	★	★	•	★	★
	Vignette Finishing trim		•	★	•	★	•	★	★	•	★	★
Excalibur Arch Surrounds	Surround	Black	•	•	•	•	★	•	•	•	•	•
	Door Inlay	Black	•	•	•	•	★	•	•	•	•	•
Classic look	Louvers	Black	•	•	•	•	•	★	★	•	★	★
	Flush panels	Black	•	★	•	★	•	•	•	•	•	•
	Finishing Trim	Black	•	★	•	★	•	★	★	•	★	★
Inner panels	Bricks	Standard - Rustic Brown	★	★	★	★	★	★	★	★	★	★
		Standard - Old Town Red	★	★	★	★	★	★	★	★	★	★
		Standard - Charcoal	★	★	•	★	•	•	•	•	•	•
		Herringbone - Rustic Brown	•	•	•	•	★	★	★	★	★	★
		Castlestone	★	★	★	★	•	•	•	•	•	•
	Reflective	Black enamel	★	★	★	★	•	★	★	★	★	★
Safety Screen (included with unit or faceplate)			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Ember upgrade package			★	★	★	★	★	★	★	★	★	★
Blower (with fan speed controller)			★	★	★	★	✓	★	★	★	★	★
Controls	Programmable Thermostat		★	★	★	★	★	★	★	★	★	★
	Proflame GTMF Remote Control		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Venting	Direct vent		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	AstroCap® Venting System		★	★	★	★	★	★	★	★	★	★
	Heat Wave™ Power Duct System		•	•	•	•	★	★	★	★	★	★
Propane conversion kit			•	•	★	★	★	★	★	★	★	★

• Not available



✓ Standard

★ Optional



SPECIFICATIONS

INSTALLATION OPTIONS - G1200P, G800P, G800EH, G800EC, G800C

Non-Combustible Finishing Install







Combustible Finishing Install with Cool Wall



OPTIONS	G800EC	G800C	G800EH	G800P	G1200P
Cool Wall Option	Optional	Optional	Optional	Optional	Optional
Min. Cool Wall Opening	66 sq. in.	66 sq. in.	107 sq. in.	107 sq. in.	180 sq. in.
Min. Enclosure Ceiling	80" Cool Wall or 62" non-Cool Wall	80" Cool Wall or 62" non-Cool Wall	82" Cool Wall or 84" non-Cool Wall	72" Cool Wall or 62" non-Cool Wall	88" Cool Wall or 96" non-Cool Wall

DIMENSIONS - G1200P

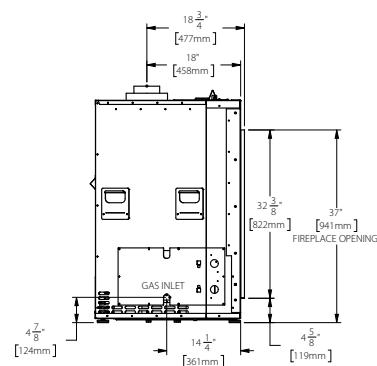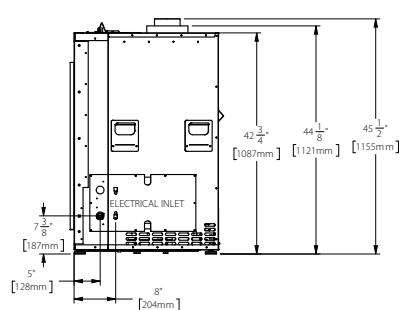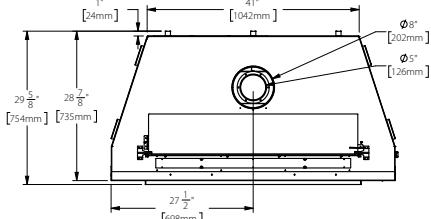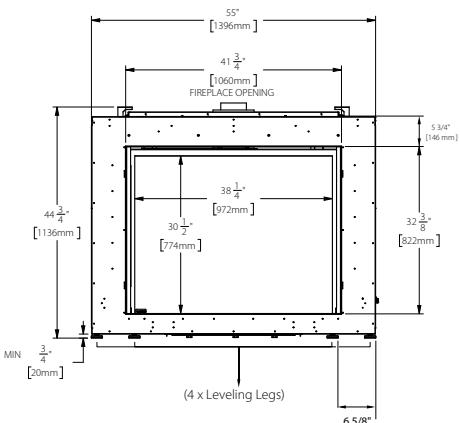


For installation, framing and clearances see manuals on our website: www.regency-fire.com


NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.

SPECIFICATIONS


DIMENSIONS - G800P

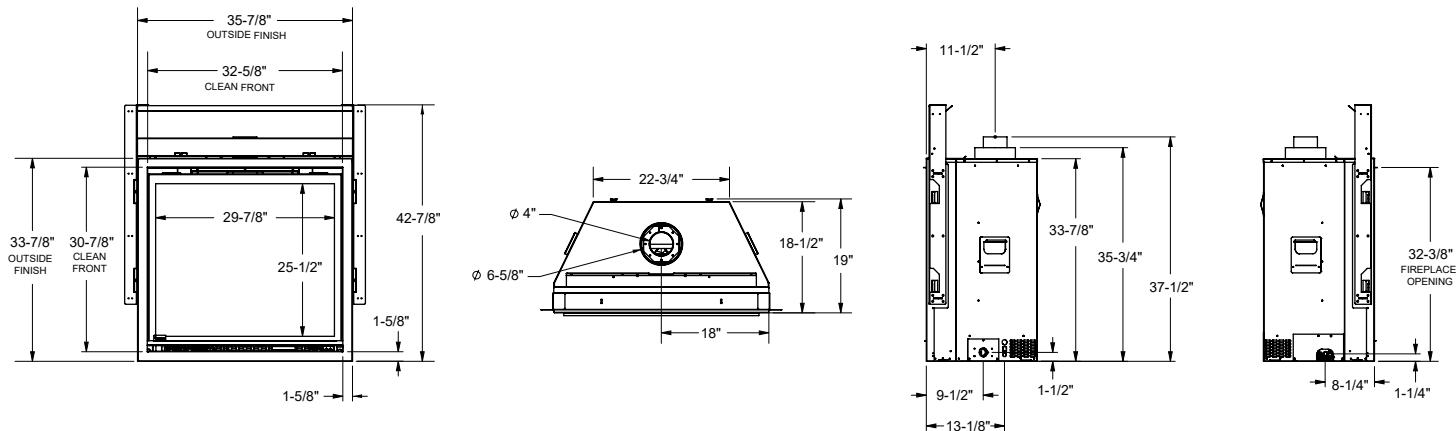


DIMENSIONS - G800EC, G800C

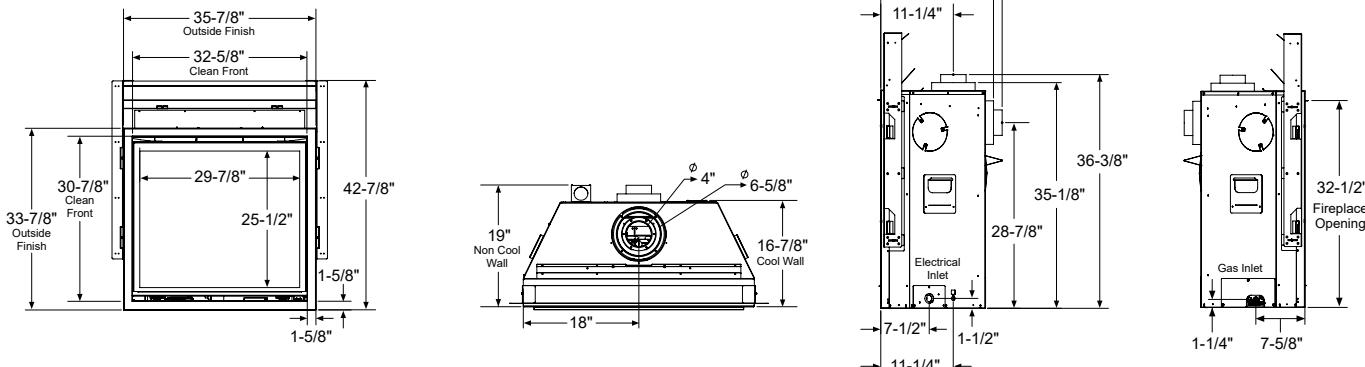

DIMENSIONS - G800EH

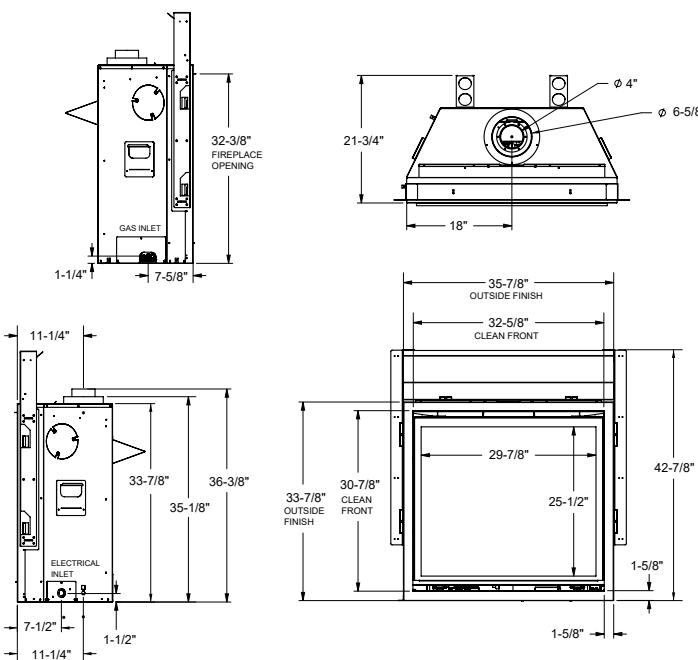


DIMENSIONS - G600EC, G600C

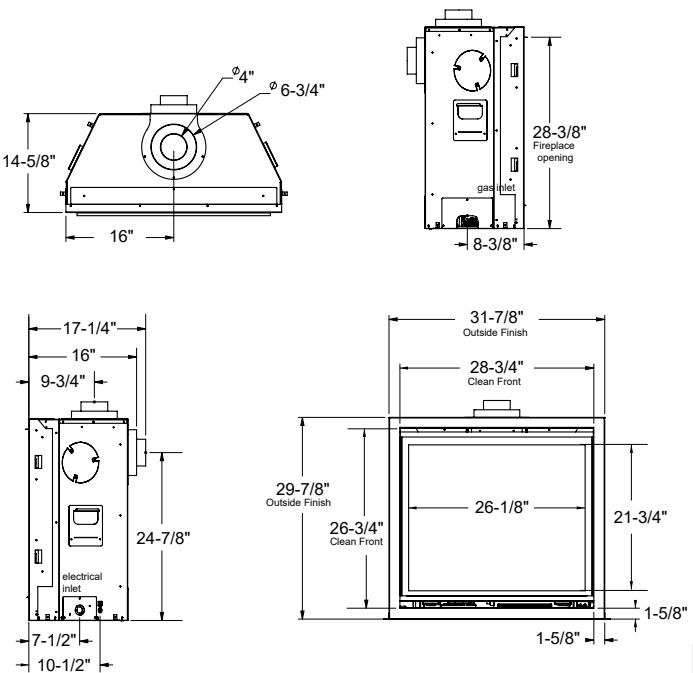

SPECIFICATIONS

FRAMING - G1200P

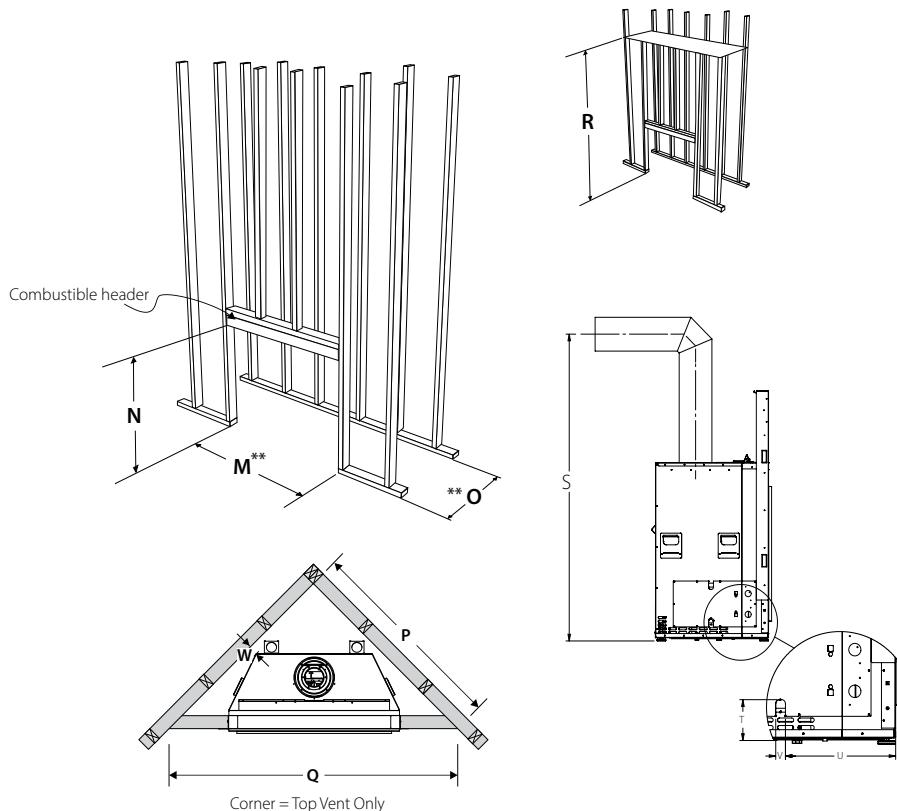

**The framing depth/width does not take into account dry wall/wood or similar materials against the back /side wall.

The framing depth will need to change based on the thickness of the material

(example: M - 57-1/4"/1454 mm framing width + 1/2" drywall x 2 Both Sides = 58-1/4"/1479 mm)

(example: O - 29"/737 mm framing depth + 1/2" drywall = 29-1/2"/749 mm)

FRAMING - G1200P

FRAMING		COOL WALL CLEAN FRONT	NON COOL WALL CLEAN FRONT
M	Framing Width	57-1/4"	57-1/4"
N*	Framing Height	51-1/4"	60-1/4"
O	Framing Depth	29"	29"
P	Corner Facing Wall Width	70-1/2"	70-1/2"
Q	Corner Facing Wall Width	99-3/4"	99-3/4"
R	Framed Chase Ceiling Enclosure	88"	96"
S	Vent Centerline Height - Top	75-1/2"	75-1/2"
T	Gas Connection Height	4-7/8"	4-7/8"
U	Gas Connection Inset	13-3/4"	13-3/4"
V	Gas Connection Width	1-1/4"	1-1/4"
W	Clearance to Corner of Unit	1"	1"




* Important: Framing height requires consideration of the hearth depth.
Dimension N = N + the thickness of the installed hearth.

OPTIONS	G1200P
Cool Wall Option	Optional
Min. Cool Wall Opening	180 sq. in.
Min. Enclosure Ceiling	88" Cool Wall or 96" non-Cool Wall

For installation, framing and clearances see manuals on our website: www.regency-fire.com

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.

SPECIFICATIONS

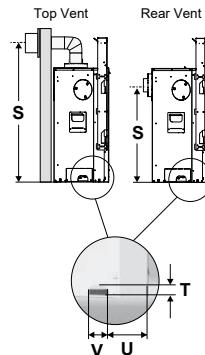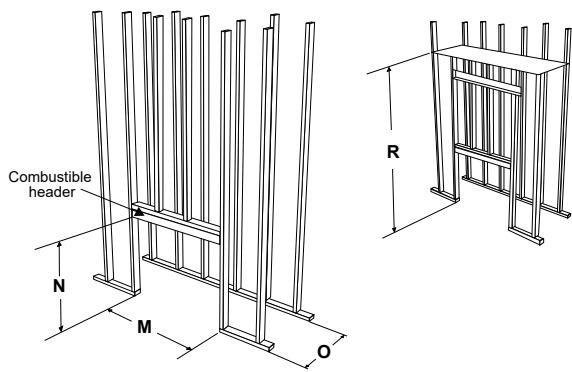

FRAMING - G800P

FRAMING		COOL WALL	CLEAN FRONT	OUTSIDE FINISH
M	Framing Width	37-1/2"	37-1/2"	37-1/2"
N*	Framing Height	43"	49-1/4"	49-1/4"
O	Framing Depth	19"	20"	20"
P	Corner Facing Wall Width	43"	44-3/8"	44-3/8"
Q	Corner Facing Wall Width	60-7/8"	62-7/8"	62-7/8"
R	Framed Chase Ceiling Enclosure	72"	62"	62"
S	Vent Centerline Height - Top	44-1/2"	44-1/2"	44-1/2"
T	Gas Connection Height	1-1/2"	1-1/2"	1-1/2"
U	Gas Connection Inset	6-3/8"	6-3/8"	6-3/8"
V	Gas Connection Width	3"	3"	3"
W	Clearance to Corner of Unit	1-1/2"	1"	1"
	Non-combustible Material Required Above Appliance	Not Required	17-1/2"	16"

* Important: Framing height requires consideration of the hearth depth. Dimension N = N + the thickness of the installed hearth.

FRAMING - G800EC, G800C

FRAMING		COOL WALL	CLEAN FRONT	OUTSIDE FINISH
M	Framing Width	36-1/2"	37-1/2"	36-1/2"
N*	Framing Height	43"	43"	43"
O	Framing Depth	16-7/8"	19-1/4"**	19-1/4"**
P	Corner Facing Wall Width	42-1/2"	61-1/4"**	46-1/2"**
Q	Corner Facing Wall Width	60"	86-5/8"	65-3/4"
R	Framed Chase Ceiling Enclosure	80"	62"	62"
S	Vent Centerline Height - Rear	29"	29"	29"
S	Vent Centerline Height - Top	44"	44"	44"
T	Gas Connection Height	1-1/2"	1-1/2"	1-1/2"
U	Gas Connection Inset	6-3/8"	6-3/8"	6-3/8"
V	Gas Connection Width	3"	3"	3"
W	Clearance to Corner of Unit	2-3/4"	2-3/4"	2-3/4"
	Non-combustible Material Required Above Appliance	Not Required	11-1/2"	10"

* Important: Framing height requires consideration of the hearth depth.

Dimension N = N + the thickness of the installed hearth.

** Top Vent Only

FRAMING - G800EH

FRAMING		COOL WALL	CLEAN FRONT	OUTSIDE FINISH
M	Framing Width	36-1/2"	37-1/2"	36-1/2"
N*	Framing Height	43"	52"	52"
O	Framing Depth	22"	22"	22"
P	Corner Facing Wall Width	42-1/2"	46-1/2"	46-1/2"
Q	Corner Facing Wall Width	60"	65-3/4"	65-3/4"
R	Framed Chase Ceiling Enclosure	82"	84"	84"
S	Vent Centerline Height - Top	44"	44"	44"
T	Gas Connection Height	1-1/2"	1-1/2"	1-1/2"
U	Gas Connection Inset	6-3/8"	6-3/8"	6-3/8"
V	Gas Connection Width	3"	3"	3"
W	Clearance to Corner of Unit	2-3/4"	2-3/4"	2-3/4"
	Non-combustible Material Required Above Appliance	Not Required	11-1/2"	10"

* Important: Framing height requires consideration of the hearth depth.


Dimension N = N + the thickness of the installed hearth.

For installation, framing and clearances see manuals on our website: www.regency-fire.com

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.

SPECIFICATIONS

FRAMING - G600EC, G600C

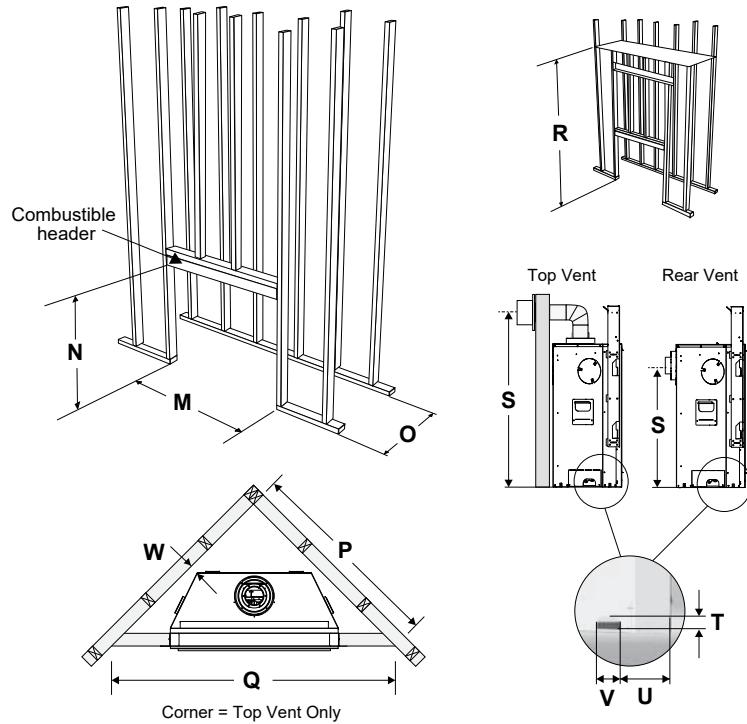

IMPORTANT: Corner applications are vented from the top only - rear venting cannot be used.

FRAMING		COOL WALL	CLEAN FRONT	OUTSIDE FINISH
M	Framing Width	33"	33-1/2"	33-1/2"
N*	Framing Height	40"	40"	40"
O	Framing Depth	15"	16-3/4"	16-3/4"
P	Corner Facing Wall Width	37-1/4"	40"**	40"**
Q	Corner Facing Wall Width	52-1/2"	57"**	57"**
R	Framed Chase Ceiling Enclosure - Rear	74-1/2"	43-1/2"	43-1/2"
R	Framed Chase Ceiling Enclosure - Top	74-1/2"	60"	60"
S	Vent Centerline Height - Rear	24-7/8"	24-7/8"	24-7/8"
S	Vent Centerline Height - Top	40"	40"	40"
T	Gas Connection Height	1-7/8"	1-7/8"	1-7/8"
U	Gas Connection Inset	8-3/8"	8-3/8"	8-3/8"
V	Gas Connection Width	3-1/2"	3-1/2"	3-1/2"
W	Clearance to Corner of Unit	1/2"	2"	2"
	Non-combustible Material Required Above Appliance	no	yes	yes

* Important: Framing height requires consideration of the hearth depth.

Dimension N = N + the thickness of the installed hearth.




** Top Vent Only

For installation, framing and clearances see manuals on our website: www.regency-fire.com

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.

SPECIFICATIONS

EXCALIBUR P90E






	P90E
A	31"
B1	35-1/8"
B2	42"
C	38"
D*	22-1/2"
E	45"
F	19-1/8"

* Without faceplate




PANORAMA DIRECT VENT FIREPLACES

P36D
P36E
P36






	P36D	P36E/ P36	P33E/ P33	P33CE
A	33-1/16"	33-1/8"	23"	23"
B	36-1/16"	36-1/16"	33"	34-9/16"
C	30-1/2"	14-3/4"	14-1/2"	29-1/4"
D*	19-1/8"	15"	14-3/4"	--
E	36"	36"	31-1/2"	31-3/4"
F	17-1/8"	12-3/4"	12-3/4"	16"
G	--	--	--	29-7/16"
H	--	--	--	21-3/8"

P33
P33E



P33CE



* Includes Vignette faceplate

See manual for Vignette finishing trim dimensions




For installation, framing and clearances see manuals on our website: www.regency-fire.com

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.




SPECIFICATIONS

BELLAVISTA DIRECT VENT FIREPLACES

**B41XTE
B36XTE**



**B41XTCE
B36XTCE**




	B41XTCE	B41XTE	B36XTCE	B36XTE
A	38-3/8"	38-3/8"	33-1/16"	33-1/16"
B	46-11/16"	41-11/16"	40-5/8"	36"
C	44-1/4"	36-11/16"	38-1/16"	34-5/8"
D*	--	24-9/16"	--	22-5/16"
E	49-1/2"	36-3/8"	41-5/16"	33-1/8"
F	26-3/16"	22-3/8"	23-5/8"	20-7/16"
G	38-7/16"	--	32-7/8"	--
H	29-1/8"	--	25-5/8"	--

* Includes Vignette Faceplate

For installation, framing and clearances see manuals on our website: www.regency-fire.com

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.

SPECIFICATIONS

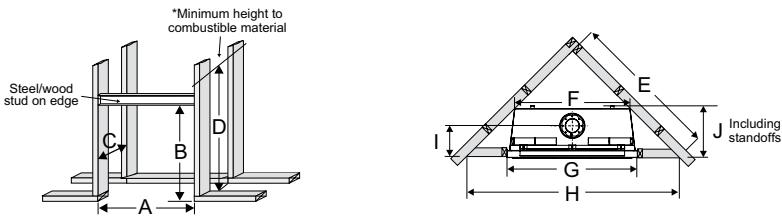

P36/P36E/P36D

INSTALLATION	UNITS	A	B	C	D*	E	F	G	H	I	J
Framing with Vignette Faceplate Stepped Finish	P36/P36E	36-1/4"	40-3/4"	12-3/4"	46"	42-7/16"	33-1/4"	36-1/4"	60"	7-1/4"	12-3/4"
	P36D	36-1/4"	40-3/4"	17-3/8"	46"	48"	33-1/4"	36-1/4"	68"	11-1/4"	17-1/8"
Framing with Vignette Faceplate & Finishing Trim Finished Flush	P36/P36E	38"	41-5/8"	14-3/4"	46"	43-11/16"	33-1/4"	38"	61-13/16"	9-1/4"	14-3/4"
	P36D	38"	41-5/8"	19-3/8"	46"	50-9/16"	33-1/4"	38"	71-9/16"	13-1/4"	-
Framing with Louvers and safety screen	P36/P36E	36-1/4"	36-1/4"	12-3/4"	46"	42-7/16"	33-1/4"	36-1/4"	60"	7-1/4"	12-3/4"
	P36D	36-1/4"	37-1/4"	17-3/8"	46"	48"	33-1/4"	36-1/4"	68"	11-1/4"	17-1/8"

* 'D' is minimum height to combustible materials including the minimum 2" top clearance to the horizontal vent.

P90E


INSTALLATION	UNIT	A	B	C	D	E	F	G	H	I	J
Framing and Finishing	P90E	46-1/2"	45-1/4" 46-3/8"*	21-1/2"	53-3/4"	51-1/8"	31"	46-1/2"	72-1/4"	13-11/16"	19-1/4"

* If raised 1-1/8" using base standoffs.

P33/P33E


VERTICAL TERMINATION OR VERTICAL RISE WITH HORIZONTAL TERMINATION
Vignette and Vignette Finishing Trim - Finished Flush

For Both Rigid & Flex

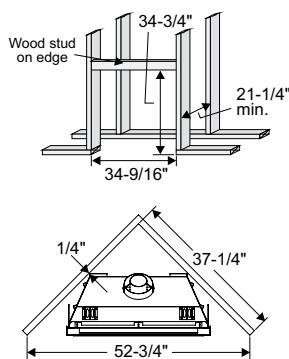


VERTICAL TERMINATION OR VERTICAL RISE WITH HORIZONTAL TERMINATION
Vignette and Vignette Finishing Trim
Stepped Finish or Safety Screen and Louvers

For Both Rigid & Flex




REAR TERMINATION
Vignette and Vignette Finishing Trim - Finished Flush

For Rigid Vent




REAR TERMINATION
Vignette and Vignette Finishing Trim
Stepped Finish or Safety Screen and Louvers


For Rigid Vent




For Flex Vent




For Flex Vent



For Both Rigid & Flex



For Both Rigid & Flex




For installation, framing and clearances see manuals on our website: www.regency-fire.com

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.


SPECIFICATIONS

P33CE

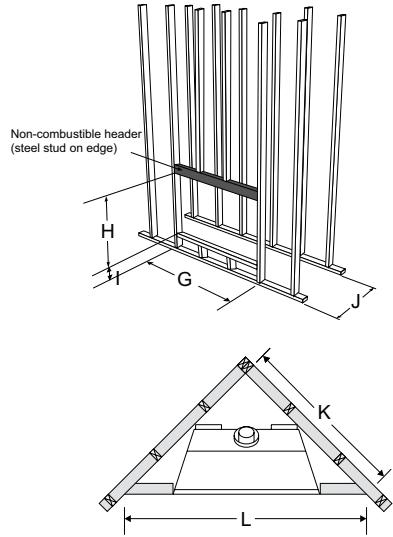

FRAMING	P33CE WITH NON-COMBUSTIBLE BOARD ONLY	P33CE WITH TILE, STONE, BRICK, SLATE, VERONA SURROUND OR OTHER NON-COMBUSTIBLE FINISH
G	35"	35"
H	31-3/4"	31-3/4"
I	0" (when not using a surround)	0" 3-5/16" min (w/ verona surround)
J	23-1/4" Vertical Rise 20-1/4" Rigid 16-1/2" Flex	22-3/4" Vertical Rise 19-3/4" Rigid 16" Flex
K	39-1/4"	38-15/16"
L	55-1/2"	54-1/2"

B36XTCE

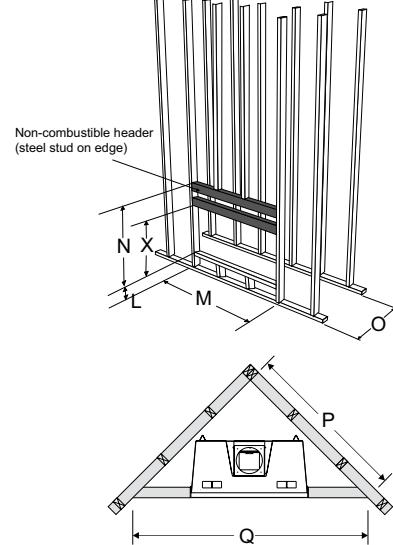


FRAMING	B36XTCE
L	0"
M	41-1/4"
N	46-3/4"
O (Rear Vent)	23-7/8"
O (Top Vent)	23-7/8"
P (Rear Vent)	57-7/8" AstroCapXL 66-1/8" other approved caps
P (Top Vent)	53-1/4"
Q (Rear Vent)	81-1/2" AstroCapXL 93-1/2" other approved caps
Q (Top Vent)	75-1/4"
X	41" (Optional steel stud)

For installation, framing and clearances see manuals on our website: www.regency-fire.com

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.


SPECIFICATIONS

B41XTCE

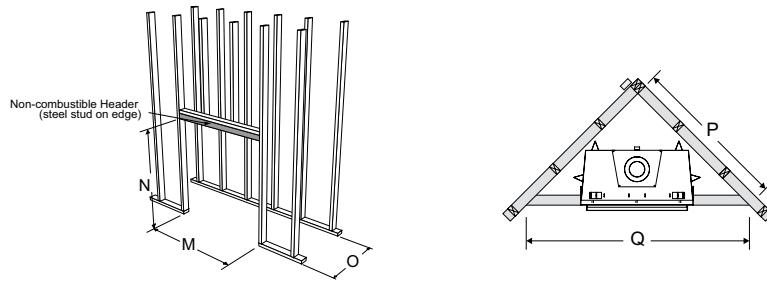

INSTALLATION	M	N	O (REAR VENT)	O (TOP VENT)	P	Q
Framing	47-1/4"	49-1/2"	26-1/2"	25-7/8"	65-1/4"	91-11/16"

B36XTE & B41XTE

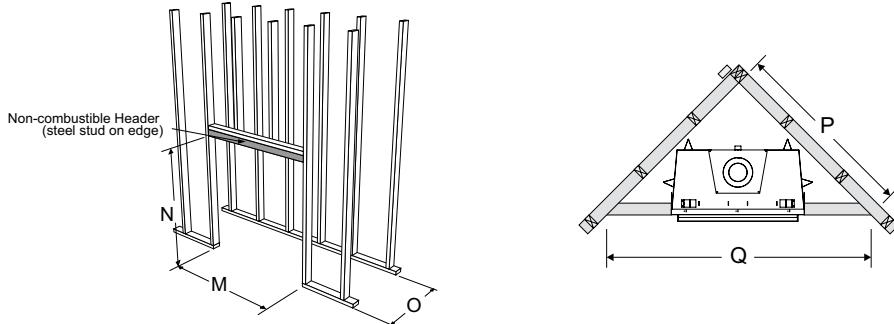

INSTALLATION	UNITS	M	N	O (REAR VENT)	O (TOP VENT)	P (REAR VENT)	P (TOP VENT)	Q (REAR VENT)	Q (TOP VENT)
Framing with Vignette (Stepped Finish) or with flush panels and safety screen	B36XTE	40-5/8"	42"	20-3/4"	20-1/2"	53" - AstroCapXL 61-1/2" - other approved caps	48-5/8"	75" - AstroCapXL 87" - other approved caps	68-3/4"
	B41XTE	47-1/4"	49-1/2"	23-1/4"	22-5/8"	60-1/4"	-	85-3/16"	-
Framing with Vignette & Vignette Trim Finished Flush	B36XTE	42-1/4"	42"*	22-1/8"	21-7/8"	55-11/16" - AstroCapXL 64-3/16" - other approved caps	51-5/16"	78-3/4" - AstroCapXL 90-3/4" - other approved caps	72-1/2"
	B41XTE	48-15/16"	50-1/4"	24-7/8"	24-7/8"	63-3/8"	-	89-5/8"	-

* NOTE: When using the optional Vignette finishing trim, this can be installed as a 3-sided or 4-sided finish trim. If choosing to use this as a 4-sided finish trim the framing would need to be increased by 11/16" minimum in order for this to fit. This must be to the finished floor.


For installation, framing and clearances see manuals on our website: www.regency-fire.com

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.



Find More Products at **REGENCY-FIRE.COM**

Your Regency Dealer



©2025 FPI Fireplace Products International Ltd. Regency®, Panorama®, Excalibur®, Bellavista®, SureFire®, Heat Wave™, Heat Release™, and AstroCap® are registered or proprietary trademarks of FPI Fireplace Products International Ltd.

All rights reserved.

Printed in Canada (08/25) Part No. 944-227

Version No: 2025-2



GAS INSERTS



regency-fire.com

WHY CHOOSE REGENCY?

At Regency, our past 40 years have been focused on providing a high-level of service while building high-quality and reliable products that our customers can enjoy for years to come.

HIGH-QUALITY

Producing a high-quality product has been at the very heart of what we do ever-since that very first stove rolled off the production line over 40 years ago. We are ever-focused on producing quality products for our customers that will last for years to come.

BEST WARRANTY

A fireplace should be reliable and should work right the first time it is used, and the 1,000th. A core part of our business is making sure that we are building long-lasting, durable, high-quality products; we back-up that commitment with the industry's best warranties on our products.

COST-EFFICIENT

Never before have home heating costs been higher. Turn your furnace way down and zone heat with our beautiful, reliable and convenient Regency products. Not only can you cut your fuel bills in half, but you'll be able to enjoy the timeless comfort of a Regency fire.

Why Regency? Because it's **more** than a fireplace!



TABLE OF CONTENTS

Regency Atmosphere Gas Inserts

Gi25LE	06
Gi27LE	08
Gi29	10
Gi33LE	12

Regency Liberty® Radiant Gas Inserts

Regency Horizon® Radiant Gas Inserts

LRi3E	14
HRi3E	16
LRi4E	18
HRi4E	20
LRi6E	22
HRi6E	24

Regency Energy™ Standing Pilot Gas Inserts

Regency Liberty® Standing Pilot Gas Inserts


E33	26
L234	27
U31	28

Specifications	31
----------------	-----------





EXPERIENCE THE
GI29 (VIDEO):





GAS INSERTS REDEFINED

Experience The Atmosphere Collection

Re-defining what's possible with a gas insert; the Atmosphere Collection was designed from the ground up to deliver more.

Sized and designed to fit into more spaces while still maintaining an industry-leading viewing area and provide unmatched views of our new revolutionary infusion burner technology.

Pick your look with mix & match accessories totaling almost 450 different combinations of logs, faceplates, surrounds, and interior panels, so you get the look that best suits your unique style and your unique home.

Enjoy more standard features with built-in fan to help improve room heating capacity and ember-bed lighting standard on most models.

More technology, more options, more realism, and more value. With Regency's Atmosphere collection you get more!

INFUSION BURNER

Experience The Most Realistic Fire



Inspired by nature and fueled by innovation, Regency's new patent-pending infusion burner technology delivers an unparalleled realistic flame and log set.

By cleverly infusing the burner into the logs, our team of engineers have created an unmatched flame picture that wraps naturally around the logs and dances effortlessly in the firebox - giving you the appearance and beauty of a real wood fire, with all the convenience of gas.

Experience the new Infusion burner throughout our Atmosphere lineup and enjoy flames so realistic your guests will have a hard time telling whether it's wood or gas!

REGENCY ATMOSPHERE Gi25

Extra Small Gas Insert



Gi25 shown with 3-sided faceplate and oak log set and black brick panels.



Gi25LE shown with 3-sided finishing trim, painted black inner panels, and driftwood log set.



Gi25LE shown with a regular faceplate, 4-sided finishing trim, painted black inner panels, and oak log set.



Gi25LE shown with a regular 3-sided faceplate, painted black inner panels, and oak log set.

NEW Gi25LE • Extra Small Gas Insert

This unit personifies the expression, "Great things come in small packages." Designed to fit into smaller spaces, the Gi25LE sports an impressive viewing area highlighting its infusion burner, an improved high-definition artisan-crafted log set, and a modern, flush design.

SPECIFICATIONS Gi25LE	NATURAL GAS	PROPANE
Input (BTU)	20,500	20,500
Turn down to (BTU)	14,500	17,000
Efficiency (steady state)	63.33	68.33%
EnerGuide Rating (Canada only)	63.60%	63.60%

DIMENSIONS	
Height	17"
Width	25"
Depth	15"
Viewing Area	212 sq. in.

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.



Gi25LE shown with 3-Sided finishing trim, brown brick panels and oak log set.



Gi25LE shown with a regular 4-sided faceplate, painted black inner panels, and oak log set.



Gi25LE shown with a regular faceplate, adjustable hearth riser, and birch log set.



Gi25LE shown with 3-sided trim, oversized backing plate, and oak log set.

STANDARD FEATURES

- NEW: innovative, patented infusion burner
- Invisimesh safety screen for a clear view of the fire
- Proflame II GTMF remote control system
- Variable speed blower for max heat distribution
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Limited lifetime warranty

OPTIONS

- Multiple faceplate styles
- Multiple log set choices: oak, birch or driftwood
- Interior panels in Rustic Brown, Volcanic Black, and Herringbone
- Premium and traditional surrounds in various colors
- Wifi Kit for app control
- Flush installation options
- Mantel deflector for reduced clearances
- Oversized and custom backing plates
- Hearth trim kit for raised hearth installations
- Regency flex liners
- Propane conversion kit
- Proflame II Gas insert hardware kit

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.

REGENCY ATMOSPHERE Gi27

Small Gas Insert



Gi27 shown with 4-sided faceplate and oak log set and black brick panels



Gi27LE shown with 3-sided finishing trim, herringbone inner panels, and driftwood log set



Gi27LE shown with a regular faceplate, 4-sided finishing trim, painted black inner panels, and oak log set.



Gi27LE shown with a regular 3-sided faceplate, painted black inner panels, and birch log set.

NEW Gi27LE • Small Gas Insert

This unit personifies the expression, "Great things come in small packages." Designed to fit into smaller spaces, the Gi27LE sports an impressive viewing area highlighting its infusion burner design, an improved high-definition artisan-crafted log set, and a modern, flush design.

SPECIFICATIONS	NATURAL GAS	PROPANE
Gi27LE		
Input (BTU)	25,000	22,000
Turn down to (BTU)	17,000	17,500
Efficiency (steady state)	69.11	68.58
EnerGuide Rating (Canada only)	63.6%	64.15%

DIMENSIONS

Height	18"
Width	27"
Depth	15"
Viewing Area	258 sq. in.

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.



Gi27LE shown with 3-sided finishing trim, black panels and driftwood logs



Gi27LE shown with a regular 4-sided faceplate, herringbone inner panels, and oak log set.



Gi27LE shown with a regular faceplate, adjustable hearth riser, and birch log set.



Gi27LE shown with 3-sided trim, oversized backing plate, and driftwood log set.

STANDARD FEATURES

- NEW: innovative, patented infusion burner
- Invisimesh safety screen for a clear view of the fire
- Ember bed lighting for a realistic glow
- Proflame II GTMF remote control system
- Variable speed blower for max heat distribution
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Limited lifetime warranty


Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.

OPTIONS

- Multiple faceplate styles
- Multiple log set choices: oak, birch or driftwood
- Interior panels in Rustic Brown, Volcanic Black, and Herringbone
- Premium and traditional surrounds in various colors
- Wifi Kit for app control
- Flush installation options
- Mantel deflector for reduced clearances
- Oversized and custom backing plates
- Hearth trim kit for raised hearth installations
- Regency flex liners
- Propane conversion kit
- Proflame II Gas insert hardware kit

REGENCY ATMOSPHERE Gi29

Medium Gas Insert

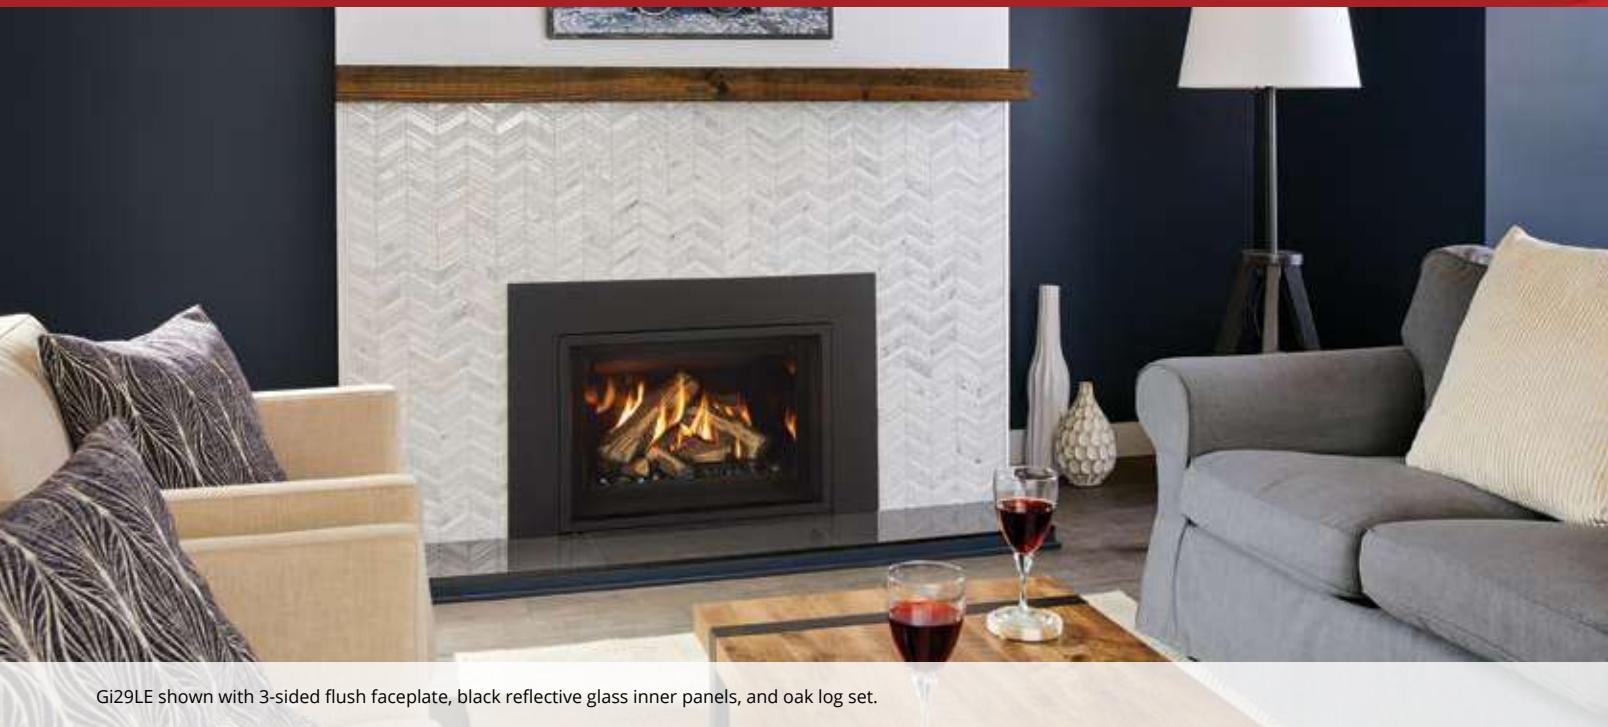

Gi29LE shown with 3-sided flush faceplate, black reflective glass inner panels, and oak log set.



Gi29LE shown with 3-sided finishing trim, black inner panels, and oak log set.



Gi29LE shown with a regular faceplate, premium brushed nickel surround, black inner panels, and oak log set.



Gi29LE shown with a regular 3-sided faceplate, painted black inner panels, and oak log set.

Gi29LE | Gi29LU • Medium Gas Inserts

Experience beauty in a standard sized firebox. The first of our Atmosphere Collection, the Gi29 exemplifies luxury with a dynamic flame filled firebox designed to fit into the most commonly occurring fireplace openings.

SPECIFICATIONS Gi29LE

	NATURAL GAS	PROPANE
Input (BTU)	31,500	31,500
Turn down to (BTU)	17,000	17,000
Efficiency (steady state)	71.70%	70.20%
EnerGuide Rating (Canada only)	63.88%	62.33%

MINIMUM FIREPLACE OPENING

Width (front)	29"
Width (rear)	20"
Height	20-1/4"
Depth	16-3/4"

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.



Gi29LE shown with a regular faceplate with traditional antique copper surround, volcanic black brick inner panels, and oak log set.



Gi29LE shown with a regular 4-sided faceplate, painted black inner panels, and driftwood log set.



Gi29LE shown with a regular faceplate, adjustable hearth riser, herringbone inner panels and birch log set.



Gi29LE shown with 3-sided trim, oversized backing plate, castlestone inner panels and oak log set.

STANDARD FEATURES

- NEW: innovative, patent-pending infusion burner
- Invisimesh safety screen for a clear view of the fire
- Ember bed lighting for a realistic glow (LE units only)
- Proflame II GTMF remote control system (LE units only)
- Standing pilot (Direct spark ignition - LU units only)
- Variable speed blower for max heat distribution
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Limited lifetime warranty

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.

OPTIONS

- Oak, birch or driftwood log sets
- Faceplates in various designs
- Premium and traditional surrounds in various colors
- Interior panels in Herringbone, Castlestone, Brown, Volcanic Black or Painted Black
- Reflective black glass interior panels
- Oversized and custom backing plates
- Mantel deflector for reduced clearances
- Hearth trim kit for raised hearth installations
- Wifi Kit for app control
- Regency flex liners
- Propane conversion kit
- Proflame II Gas insert hardwire kit

REGENCY ATMOSPHERE Gi33

Large Gas Insert



Gi33LE shown with a regular faceplate, premium sunset bronze surround, painted black inner panels, and birch log set.



Gi33LE shown with 3-sided finishing trim, black inner panels, and oak log set



Gi33LE shown with a regular faceplate, premium traditional surround in antique copper, painted black inner panels, and oak log set.



Gi33LE shown with a regular 3-sided faceplate, painted black inner panels, and oak log set.

NEW Gi33LE • Large Gas Insert

Experience beauty enlarged. The large version of our stunning Atmosphere Collection, the Gi33LE offers luxurious flame pictures and flame pictures in a big firebox. Designed to maximize heat output and flame enjoyment of the most commonly occurring large fireplace openings.

SPECIFICATIONS Gi33LE

	NATURAL GAS	PROPANE
Input (BTU)	38,500	36,500
Turn down to (BTU)	20,500	20,000
Efficiency (steady state)	68.60%	69.50%
EnerGuide Rating (Canada only)	64.30%	64.32%

MINIMUM FIREPLACE OPENING

Width (front)	33"
Width (rear)	22-3/8"
Height	24"
Depth	18"

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.



Gi33LE shown with 4-sided finishing trim, herringbone brick inner panels, and oak log set.



Gi33LE shown with a regular 4-sided faceplate, painted black inner panels, and driftwood log set.



Gi33LE shown with a regular faceplate, adjustable hearth riser, herringbone inner panels and birch log set.



Gi33LE shown with 3-sided trim, oversized backing plate, castlestone inner panels and oak log set.

STANDARD FEATURES

- NEW: innovative, patented infusion burner
- Invisimesh safety screen for a clear view of the fire
- Ember bed lighting for a realistic glow
- Proflame II GTMF remote control system
- Variable speed blower for max heat distribution
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Limited lifetime warranty

OPTIONS

- Oak, birch or driftwood log sets
- Faceplates in various designs
- Premium and traditional surrounds in various colors
- Interior panels in Herringbone, Castlestone, Brown, Volcanic Black or Painted Black
- Reflective black glass interior panels
- Oversized and custom backing plates
- Mantel deflector for reduced clearances
- Hearth trim kit for raised hearth installations
- Wifi Kit for app control
- Regency flex liners
- Propane conversion kit
- Proflame II Gas insert hardwire kit

REGENCY LIBERTY® RADIANT LRi3E

Compact Gas Fireplace Insert



LRi3E shown with Vignette faceplate in Black and Rustic Brown interior panels.



Small backing plate and Vignette faceplate in Platinum



Regular backing plate and Vignette faceplate in Tuscan Sunset



Arched backing plate and arched Vignette faceplate in Black

COMPACT AND EFFICIENT

Regency is proud to present the newest addition to the Liberty gas insert family, now available in a smaller size to fit a larger array of spaces. Enjoy timeless, artisan-crafted logs with the combined power of radiant & convective heat. Vignette designer faceplates provide you with the choice to create a modern transitional look or a traditional look with Georgian & Tudor styles.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	20,500	19,000
Turn down to (BTU)	14,000	15,500
Efficiency (steady state)	73.12%	74.59%
EnerGuide Rating (Canada only)	66.25%	66.70%

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)

Width (front)	28-1/2"
Width (rear)	21-5/8"
Height	19-1/2"
Depth	14-1/2"

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace. See product specifications on page 31.



LRi3E shown with 4-sided regular backing plate and Vignette faceplate in Platinum.



Regular backing plate, Vignette faceplate in Black and Craftsman inlay in Black



Regular backing plate, Vignette faceplate and Door inlay in Black



Arched backing plate and arched Vignette Tudor faceplate in Black

STANDARD FEATURES

- Sleek and compact size to accommodate for a variety of spaces
- Versatile design choices to create a traditional or modern transitional look
- Log set with ceramic ember bed
- Heat radiating ceramic glass with safety screen
- Variable speed blower for max heat distribution
- Proflame II GTMF remote control system
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Natural gas
- Limited lifetime warranty

OPTIONS

- Vignette faceplates in various designs and colors
- Vignette inlays in various designs and colors
- Interior panels in Old Town Red, Rustic Brown or Volcanic Black
- Reflective black enamel interior panels
- Small, regular, arched, oversized and custom backing plates
- Hearth trim kit and mantel deflector
- Regency flex liners
- Propane conversion kit
- Proflame II Gas insert hardwire kit

REGENCY HORIZON® RADIANT HRi3E

Compact Gas Fireplace Insert



HRi3E shown with Vignette faceplate in Black, Black Crystals with Volcanic Stones and Black Reflective Enamel panels.



Small backing plate and Vignette faceplate in Black Chrome with Starfire Crystals



Arched backing plate and arched Vignette faceplate in Black with optional volcanic stones



4-sided regular backing plate and Vignette faceplate in Platinum with Black Crystals

COMPACT AND CUSTOMIZABLE

Designed for contemporary spaces, the HRi3E is as versatile as it is beautiful. The HRi3E gas insert delivers heat efficiently and with a captivating style. Choose the look you want with a wide selection of accent options. Colored glass crystals or firebeads combine elegantly with spa stones or driftwood logs.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	19,500	19,000
Turn down to (BTU)	14,000	15,500
Efficiency (steady state)	71.73%	72.87%
EnerGuide Rating (Canada only)	64.36%	66.24%

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)

Width (front)	28-1/2"
Width (rear)	21-5/8"
Height	19-1/2"
Depth	14-1/2"

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace. See product specifications on page 31.



HRi3E shown with regular backing plate, Vignette faceplate in Platinum with Black Crystals and optional Driftwood log set.



Regular backing plate, Vignette faceplate in Black, Craftsman inlay in Black with Black Crystals and optional Driftwood log set



Regular backing plate, Vignette faceplate in Black, Door inlay in Black with Black Crystals and optional Volcanic Stones



Regular backing plate, Vignette Tudor faceplate in Black with Black Crystals and optional Volcanic Stones

STANDARD FEATURES

- Horizon contemporary linear fire bed with a generous range of media options
- Heat radiating ceramic glass with safety screen
- 6-tube heat exchanger for max efficiencies
- Variable speed blower for max heat distribution
- Electronic ignition with SureFire™ switch
- Proflame I GTMF remote control
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Natural gas
- Limited lifetime warranty

OPTIONS

- Vignette faceplates in various designs and colors
- Vignette inlays in various designs and colors
- Firebeads and crystals in various colors
- Driftwood log set, Volcanic Stones, Spa Stones or River Pebbles
- Reflective black enamel interior panels
- Small, regular, arched, oversized and custom backing plates
- Hearth trim kit and mantel deflector
- Regency flex liners
- Propane conversion kit
- Proflame II Gas insert hardwire kit

REGENCY LIBERTY® RADIANT LRi4E

Medium Gas Fireplace Insert



LRi4E shown with regular backing plate, Vignette faceplate in Black, Door Inlay in Black and Rustic Brown Brick Panels.



Small backing plate and Vignette faceplate in Platinum



Regular backing plate and Vignette faceplate in Tuscan Sunset



4-sided regular backing plate and Vignette faceplate in Black

PERFORMANCE AND STYLE

The Liberty Radiant LRi4E gas insert exemplifies Regency's renowned commitment to quality. A source of both radiant and convective heat, the LRi4E delivers high-efficiency heat safely and reliably throughout your home. Turn on the integrated circulating fan to intensify the warming effect. This statement fireplace can be customized with Regency's selection of accent trim options.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	31,000	31,000
Turn down to (BTU)	22,000	26,000
Efficiency (steady state)	71.45%	73.01%
EnerGuide Rating (Canada only)	70.27%	69.36%

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)	
Width (front)	30"
Width (rear)	22"
Height	20"
Depth (without spacer)	18"
Depth (with spacer)	15-3/4"

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.
See product specifications on page 31.



LRi4E shown with arched backing plate and decorative arched Vignette faceplate in Black.



Regular backing plate, Vignette faceplate in Black and Craftsman inlay in Black



Regular backing plate, Vignette faceplate in Black and Door inlay in Black



Regular backing plate and Vignette Georgian faceplate in Black

STANDARD FEATURES

- A variety of trims available to add a unique design touch
- Log set with ceramic ember bed
- Heat radiating ceramic glass with safety screen
- 6-tube heat exchanger for max efficiencies
- Variable speed blower for max heat distribution
- Electronic ignition with SureFire™ switch
- Proflame I GTMF remote control
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Natural gas
- Limited lifetime warranty

OPTIONS

- Vignette faceplates in various designs and colors
- Vignette inlays in various designs and colors
- Faceplate spacer for shallow fireplace installations
- Interior panels in Old Town Red, Rustic Brown or Volcanic Black
- Reflective black enamel interior panels
- Small, regular, arched, oversized and custom backing plates
- Mantel deflector for reduced clearances
- Hearth trim kits for raised hearth installations
- Wall thermostat
- Regency flex liners
- Propane conversion kit

REGENCY HORIZON® RADIANT HRi4E

Medium Gas Fireplace Insert



HRi4E shown with 4-sided regular backing plate, Vignette faceplate in Platinum with Black Crystals and optional Driftwood log set.



Small backing plate and Vignette faceplate in Black with Black Crystals and optional Driftwood log set



Arched backing plate and arched Vignette faceplate in Black with optional Starfire Crystals



Regular backing plate and Vignette faceplate in Black with optional Black Crystals

MODERN AND ELEGANT

Add comfort and update the look of your home with a Regency Horizon Radiant medium-sized gas insert. Radiant inserts deliver heat efficiently and can be customized with captivating firebed options. Simply choose the style you want: combine colored glass crystals or firebeads with spa stones for natural elegance or select driftwood logs for a coastal look.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	31,000	31,000
Turn down to (BTU)	22,000	26,000
Efficiency (steady state)	71.45%	73.01%
EnerGuide Rating (Canada only)	70.27%	69.36%

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)

Width (front)	30"
Width (rear)	22"
Height	20"
Depth (without spacer)	18"
Depth (with spacer)	15-3/4"

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.
See product specifications on page 31.



HRi4E shown with regular backing plate, Vignette faceplate in Platinum and Black Crystals.



Regular backing plate, Vignette faceplate in Black, Craftsman inlay in Black with Black Crystals and optional Volcanic Stones



Regular backing plate, Vignette faceplate in Black and Door inlay in Black with Black Crystals



Regular backing plate and Vignette Tudor faceplate in Black with Black Crystals

STANDARD FEATURES

- Horizon contemporary linear fire bed with a generous range of media options
- Heat radiating ceramic glass with safety screen
- 6-tube heat exchanger for max efficiencies
- Variable speed blower for max heat distribution
- Electronic ignition with SureFire™ switch
- Proflame I GTMF remote control
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Natural gas
- Limited lifetime warranty

OPTIONS

- Vignette faceplates in various designs and colors
- Vignette inlays in various designs and colors
- Faceplate spacer for shallow fireplace installations
- Driftwood log set, crystals or firebeads in various colors
- Volcanic Stones, Spa Stones, or accent River Pebbles
- Reflective black enamel interior panels
- Small, regular, arched, oversized and custom backing plates
- Mantel deflector for reduced clearances
- Hearth trim kits for raised hearth installations
- Wall thermostat
- Regency flex liners
- Propane conversion kit

REGENCY LIBERTY® RADIANT LRi6E

Large Gas Fireplace Insert



LRi6E shown with decorative arched Vignette and arched backing plate in Black.



Small backing plate and Vignette faceplate in Tuscan Sunset



Regular backing plate and Vignette faceplate in Black



4-sided regular backing plate and Vignette faceplate in Platinum

RADIANT CONVECTIVE HEAT

This large, high-efficiency heater provides intense radiant heat instantly. Enjoy strong heat in the area directly in front of your fireplace or turn on the included heat circulating blower to distribute comforting warmth into the far corners of your room. The Regency Liberty LRi6E large gas insert is a stylish, reliable source of warmth and ambiance, even during a power outage.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	38,000	38,000
Turn down to (BTU)	25,000	30,000
Efficiency (steady state)	73.01%	73.01%
EnerGuide Rating (Canada only)	70.37%	70.37%

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)

Width (front)	34"
Width (rear)	25"
Height	24"
Depth (without spacer)	19-1/2"
Depth (with spacer)	16-3/4"

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.
See product specifications on page 31.



LRi6E shown with regular backing plate, Vignette faceplate in Black, Craftsman inlay in Black.



Regular backing plate, Vignette faceplate in Black, Door inlay in Black



Regular backing plate, Vignette Tudor faceplate in Black



Arched backing plate and arched Vignette faceplate in Black

STANDARD FEATURES

- A generous range of media options, inlays, and faceplates available to customize to your liking
- Black steel interior panels
- Log set with ceramic ember bed
- Heat radiating ceramic glass with safety screen
- 6-tube heat exchanger for max efficiencies
- Variable speed blower for max heat distribution
- Electronic ignition with SureFire™ switch
- Proflame I GTMF remote control
- 6-tube heat exchanger for max efficiencies
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Natural gas
- Limited lifetime warranty

OPTIONS

- Vignette faceplates in various designs and colors
- Vignette inlays in various designs and colors
- Faceplate spacer for shallow fireplace installations
- Interior panels in Old Town Red, Rustic Brown or Volcanic Black
- Reflective black enamel interior panels
- Small, regular, arched, oversized and custom backing plates
- Mantel deflector for reduced clearances
- Hearth trim kits for raised hearth installations
- Wall thermostat
- Regency flex liners
- Propane conversion kit

REGENCY HORIZON® RADIANT HRi6E

Large Gas Fireplace Insert



HRi6E shown with regular backing plate, Vignette faceplate in Black Chrome, Black Crystals with Volcanic Stones and Black Reflective Enamel panels.



Small backing plate, Vignette faceplate in Platinum with Black Crystals and optional Volcanic Stones



Arched backing plate, arched Vignette faceplate in Black with Black Crystals and optional Driftwood log set



4-sided regular backing plate, Vignette faceplate in Black with Black Crystals

SLEEK AND CONTEMPORARY

The Regency Horizon Radiant Series introduces a sleek, contemporary large gas insert designed to transform your existing fireplace.

Choose from a selection of modern Vignette faceplates and firebed options to create a unique look. Backed by the industry's best warranty, the HRi6E provides reliable, high-efficiency heat with exceptional styling.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	38,000	38,000
Turn down to (BTU)	25,000	30,000
Efficiency (steady state)	73.01%	73.01%
EnerGuide Rating (Canada only)	70.37%	70.37%

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)

Width (front)	34"
Width (rear)	25"
Height	24"
Depth (without spacer)	19-1/2"
Depth (with spacer)	16-3/4"

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.
See product specifications on page 31.



HRI6E shown with regular backing plate, Vignette faceplate in Black with Black Crystals and optional Driftwood log set.



Regular backing plate, Vignette faceplate in Black and Door inlay in Black with Black Crystals



Regular backing plate, Vignette faceplate in Black and Craftsman inlay in Black with Starfire Crystals



Regular backing plate, Vignette Tudor faceplate in Black with Black Crystals and optional Volcanic Stones

STANDARD FEATURES

- Horizon contemporary linear fire bed with a generous range of media options
- Heat radiating ceramic glass with safety screen
- 6-tube heat exchanger for max efficiencies
- Variable speed blower for max heat distribution
- Electronic ignition with SureFire™ switch
- Proflame I GTMF remote control
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Natural gas
- Limited lifetime warranty

OPTIONS

- Vignette faceplates in various designs and colors
- Vignette inlays in various designs and colors
- Faceplate spacer for shallow fireplace installations
- Driftwood log set, crystals or firebeads in various colors
- Volcanic Stones, Spa Stones, or Accent River Pebbles
- Reflective black enamel interior panels
- Small, regular, arched, oversized and custom backing plates
- Mantel deflector for reduced clearances
- Hearth trim kits for raised hearth installations
- Wall thermostat
- Regency flex liners
- Propane conversion kit

REGENCY ENERGY™ E33

Large Gas Fireplace Insert



E33 shown with Vignette faceplate in Black, Door inlay in Black and brick panels.

AN ATTRACTIVE HEAT SOURCE

The E33 large gas fireplace insert is a high-efficiency heat source that is designed to seal old drafty fireplaces and provide controllable gas heat. With a standard variable-speed blower, the E33 helps circulate air within the room, distributing it further than radiant heat alone. This unit is a sealed system that uses outside air for combustion – making it perfect for airtight homes.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	38,000	35,500
Turn down to (BTU)	20,000	19,000
Efficiency (steady state)	70.14%	70.73%
EnerGuide Rating (Canada only)	60.70%	61.49%

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)

Width (front)	32-1/4"
Width (rear)	25"
Height	24"
Depth (without spacer)	18"
Depth (with spacer)	16-3/4"

STANDARD FEATURES

- Heat radiating ceramic glass with safety screen
- Log set with glowing embers
- Flame height adjustment control
- Variable speed blower
- Proflame I GTM remote control
- 30° angled flue for versatile installations
- Standing pilot system
- Direct spark ignition
- Natural gas
- Limited lifetime warranty

OPTIONS

- Faceplates in low profile or Vignette design
- Vignette door inlay in various colors
- Custom backing plate
- Brick panels
- Wall thermostat
- Installation spacer
- Regency flex liners
- Propane conversion kit

REGENCY LIBERTY® L234

Small Gas Fireplace Insert



L234 shown with Low Profile faceplate and brick panels.

COMPACT SIZE FOR TIGHTER OPENINGS

Designed to fit smaller openings in existing masonry fireplaces, and inefficient steel fireplaces, the L234 small gas insert delivers efficient heat with stylish good looks. Highly realistic logs make this quality, small gas insert an excellent choice for small to medium size spaces.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	23,500	21,500
Turn down to (BTU)	16,500	17,000
Efficiency (steady state)	73.94%	74.67%
EnerGuide Rating (Canada only)	63.34%	64.73%

STANDARD FEATURES

- Heat radiating ceramic glass with safety screen
- Log set with glowing embers
- Flame height adjustment control
- Variable speed blower
- Proflame I GTM remote control
- Standing pilot system with 7-Day timed shut off
- Direct spark ignition
- Direct vent to increase efficiency & warmth retention
- Installation spacer
- Natural gas
- Limited lifetime warranty

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)

Width (front)	25"
Width (rear)	16"
Height	17"
Depth (without spacer)	14"
Depth (with spacer)	--

OPTIONS

- Low profile faceplate
- Custom backing plate
- Adjustable hearth riser
- Brick panels
- Basic or programmable thermostat
- 3" to 2" air intake reducer
- Regency flex liners
- Propane conversion kit

Note: This unit is only available in select markets.

REGENCY ENERGY™ U31

Medium Gas Fireplace Insert



U31 shown with Low Profile faceplate and brick panels.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	30,000	28,000
Turn down to (BTU)	20,600	22,000
Efficiency (steady state)	58.45%	59.29%
EnerGuide Rating (Canada only)	51.42%	47.41%

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)

Width (front)	26-1/2"
Width (rear)	22-1/2"
Height	21"
Depth (without spacer)	--
Depth (with spacer)	15"

STANDARD FEATURES

- Heat radiating ceramic glass with safety screen
- Log set with glowing embers
- Flame height adjustment control
- Variable speed blower
- Proflame I GTM remote control
- Standing pilot system
- Direct spark ignition
- B vent
- Installation spacer
- Natural gas
- Limited lifetime warranty

OPTIONS

- Low profile faceplates
- Custom backing plate
- Contour faceplate
- Hearth trim kit
- Black louvers
- Brick panels
- Basic or programmable wall thermostat
- Regency flex liners
- Propane conversion kit


Note: This unit is only available in select markets.

OTHER OPTIONS

DIRECT VENT TECHNOLOGY


A Regency gas insert is a specially engineered, sealed fireplace that slips into your existing masonry or pre-fab fireplace to create a high-efficiency heating system with a beautiful fire. The airtight firebox uses outside air for combustion, helping maintain indoor air quality and keeping all the warmth generated from your fireplace in your home.

Even when the fireplace is turned off, the sealed system will prevent cold air from entering the home and warm air from leaving.



PROFLAME II GAS INSERT HARDWIRE KIT

This kit allows you to have a hard-wire electrical connection within your existing fireplace for a safe and cord free installation.




INTELLIGENT IGNITION SYSTEM*

Regency gas fireplace inserts feature an Intelligent Ignition System that lights the pilot only when needed, reducing gas usage and costs. In colder climates, it can be set to Continuous Pilot Mode (CPI), keeping the pilot lit for up to seven days. With a new 5-second Flame Failure Response Time (FFRT) sensor, it ensures reliable ignition even in cold conditions, enhancing performance and efficiency.

*Not available on L234, U31, E33, Gi29LU.

SPREAD THE WARMTH

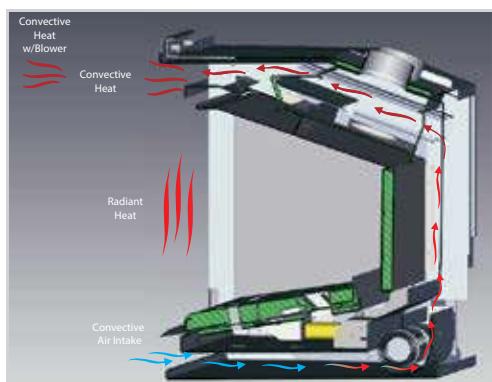

Blower

Note: This unit is only available in select markets.

REMARKABLE EFFICIENCY

The precision-engineered heat exchanger systems dramatically increase the overall heating efficiency of these Regency gas inserts. The cold air from your room passes through the pre-heated heat exchanger system, which is then re-distributed back into your room as comforting warm air (also known as convection heat).

POWERFUL RADIANT HEAT

Not only do these gas inserts include the latest innovations in fireplace technology and efficiencies, they also generate a large amount of radiant heat from the flames of the fire package. The heat from the fire radiates through the ceramic glass and transfers that warmth to you, providing the perfect combination of radiant and convective heat distribution.

VARIABLE SPEED BLOWER TO MAXIMIZE EFFICIENCY

Regency blowers are a standard feature with all gas inserts. A blower will let you enjoy the warmth of your fireplace from any corner of your living space. Our quiet blowers increase the efficiency of your fireplace by pushing the heat produced by your fireplace forward, distributing it further, and evenly into your room.

ATMOSPHERE COLLECTION – ACCESSORIES

Mix & match accessories along with almost 450 different combinations create the look you desire. The modular accessory system, featured in our most flexible gas inserts ever, enables you to tailor your fireplace to match your home and décor perfectly.

FRONT OPTIONS



3-sided & 4-sided Finishing Trim



Regular Faceplate with Premium Sunset Bronze Surround



Flush 3-Sided Faceplate



Flush 4-Sided Faceplate



Flush Faceplate with Traditional Surround


PREMIUM SURROUNDS



Black



White



Sunset Bronze



Grey



Brushed Nickel



Black




Brushed Antique Copper

INTERIOR PANEL OPTIONS



Brown Brick




Herringbone Brick



Castlestone Brick



Volcanic Black Brick



Painted Black



Reflective Black Glass

FIREBED OPTIONS



Oak Log Set



Birch Log Set



Driftwood Log Set

BACKING PLATES



Custom 3-sided



Custom 4-sided



Oversized

ATMOSPHERE COLLECTION – SPECIFICATIONS


ACCESSORIES	Gi25 (ELECTRONIC IGNITION)	Gi27 (ELECTRONIC IGNITION)	Gi29LU STANDING PILOT 820 (US ONLY)	Gi29LE • Gi33LE ELECTRONIC IGNITION
Ceramic Glass	✓	✓	✓	✓
Proflame II Remote Control	✓	✓	•	✓
On/Off Remote Control with Thermostat	•	•	✓	•
Blower (with Fan Speed Control)	✓	✓	✓	✓
Emberbed Lights	•	•	•	✓
Inner Panels (must choose 1)	Brown Brick	★	★	★
	Herringbone Brick	★	★	★
	Castlestone Brick	•	•	★
	Volcanic Black Brick	★	★	★
	Reflective Black Glass	•	★	★
	Painted Black	✓	✓	★
Faceplates with Safety Screen (must choose 1)	Regular	★	★	★
	Flush 3-Sided	★	★	★
	Flush 4-Sided	★	★	★
	3-Sided Finishing Trim	★	★	★
	4-Sided Finishing Trim	★	★	★
Premium Surrounds	Black	★	★	★
	Grey	★	★	★
	White	★	★	★
	Sunset Bronze	★	★	★
	Brushed Nickel	★	★	★
Traditional Surrounds	Black	★	★	★
	Brushed Antique Copper	★	★	★
Backing Plates	Oversized	★	★	★
	Custom 3-Sided	★	★	★
	Custom 4-Sided	★	★	★
Media (must choose 1)	Driftwood Log Set	★	★	★
	Birch Log Set	★	★	★
	Oak Log Set	★	★	★
	*Log Grate/Ember Media (Must order when purchasing either oak or Birch log set)	•	•	★
Wall Thermostat	Basic	★	★	★
	Programmable	★	★	★
Wifi Kit	★	★	•	★
Mantel Deflector	★	★	★	★
Adjustable Hearth Trim	★	★	★	★
Turn down flame modulator	✓	✓	✓	✓
Intelligent ignition system	✓	✓	•	✓
Propane Conversion Kit	★	★	★	★
30° angled flue	✓	✓	✓	✓
Gas Insert Hardwire Kit	★	★	•	★

• Not available ✓ Standard ★ Optional


NOTE: The premium surrounds may only be used on the regular faceplate and the traditional surrounds on the flush 3-sided faceplate.

LIBERTY AND HORIZON OPTIONS


VIGNETTE FACEPLATE OPTIONS (NOT AVAILABLE ON ALL MODELS)




Vignette with 3-sided
Backing Plate




Vignette with 4-sided
Backing Plate



Tudor Rustic Vignette Faceplate



Arched Vignette Faceplate




Decorative Arched
Vignette Faceplate


BACKING PLATE OPTIONS*




Small Backing Plate




Arched Backing Plate



Regular Backing Plate



4-sided Regular Backing Plate



Oversized Backing Plate

*Custom sizes also available

VIGNETTE INLAY OPTIONS



Vignette Door Inlay**




Vignette Craftsman Inlay**


VIGNETTE FACEPLATE & VIGNETTE INLAY FINISHES



Black



Black Chrome



Tuscan Sunset



Platinum
(Not available
for inlays)

CRYSTALS & FIREBEADS



Crystals - Black



Crystals - Copper



Crystals - Starfire



Firebeads - Black



Firebeads - Caramel Luster



Firebeads - Glacier Ice

STONES & LOGS



Volcanic Stones - Gray



Volcanic Stones - Tan



Ceramic Spa Stones



Natural River Pebbles



Driftwood Ceramic Log Set

INNER PANELS



Reflective Black
Enamel Panels



Standard -
Rustic Brown



Standard -
Old Town Red



Standard -
Volcanic Black



Black Steel
(Available for LRi4E and
HRi4E only)

ACCESSORIES

ACCESSORIES - AT A GLANCE		LRi3E	HRi3E	LRi4E	HRi4E	LRi6E	HRi6E	E33	U31	L234
Horizon firebed	Crystals in various colors	•	★	•	★	•	★	•	•	•
	Firebeads in various colors	•	★	•	★	•	★	•	•	•
	Ceramic spa stones	•	★	•	★	•	★	•	•	•
	Volcanic stones	•	★	•	★	•	★	•	•	•
	Driftwood log set (natural gas only on HRi4E & HRi6E)	•	★	•	★	•	★	•	•	•
Backing plates	Small	★	★	★	★	★	★	•	•	•
	Regular	★	★	★	★	★	★	•	•	•
	4-sided regular	★	★	★	★	★	★	•	•	•
	Oversized	★	★	★	★	★	★	•	•	•
	Arched	★	★	★	★	★	★	•	•	•
Vignette faceplates	Vignette		Black	★	★	★	★	★	•	•
	Vignette - 4-sided		Black chrome	★	★	•	•	•	•	•
	Rustic Vignette		Platinum	★	★	★	★	★	•	•
	Arched		Tuscan sunset	★	★	★	★	★	•	•
	Arched Vignette		Black	•	•	•	•	•	★	•
	Decorative		Black	★	★	★	★	★	•	•
	Arched		Black	★	★	★	★	★	•	•
	Door inlay		Black	★	★	★	★	★	★	•
	Craftsman inlay		Black	★	★	★	★	★	•	•
	Low profile - 3-sided		Black	•	•	•	•	•	★	★
Low profile faceplates	Low profile - 3-sided - oversize		Black	•	•	•	•	•	★	•
	Low profile - 3-sided - custom		Black	•	•	•	•	•	★	★
	Contour faceplate		Black	•	•	•	•	•	•	★
Louvers		Black	•	•	•	•	•	•	•	★
Inner panels	Bricks		Rustic brown	★	•	★	•	★	★	★
	Old town red		Old town red	★	•	★	•	★	★	★
	Volcanic black		Volcanic black	★	•	★	•	★	•	•
	Steel		Black	•	✓	★	★	✓	✓	✓
	Reflective		Black enamel	★	★	★	★	★	•	•
Safety screen		✓	✓	✓	✓	✓	✓	✓	✓	✓
Spacer		•	•	★	★	★	★	•	•	✓
Hearth trim		★	★	★	★	★	★	★	★	★
Variable speed blower		✓	✓	✓	✓	✓	✓	✓	✓	✓
Wall thermostat		★	★	★	★	★	★	★	★	★
Remote control	Proflame GT	•	•	•	•	•	•	•	✓	•
	Proflame GTM	•	•	•	•	•	•	✓	•	✓
	Proflame GTMF	✓	✓	✓	✓	✓	✓	✓	•	•
Turn down flame modulator		✓	✓	✓	✓	✓	✓	✓	✓	✓
Direct vent		✓	✓	✓	✓	✓	✓	✓	•	✓
B-Vent		•	•	•	•	•	•	•	✓	•
Intelligent Ignition system		✓	✓	✓	✓	✓	✓	✓	•	•
Propane conversion kit		★	★	★	★	★	★	★	★	★

- Not available
- ✓ Standard
- ★ Optional

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up to date information.

OTHER OPTIONS

MAXIMIZING COMFORT AND EFFICIENCY

Regency Fireplace Inserts deliver controllable heat solutions that combine the latest in radiant and convection heat technology with innovative features:

- Adjustable flame/heat control with Proflame remote controls (not available for U31)
- Heat radiating ceramic glass for maximum radiant heat
- Safety screen
- Variable speed blower to distribute heat into the farthest corners of your room
- Intelligent Ignition System* features fuel-saving intermittent pilot ignition (IPI), 7-day continuous pilot mode (CPI), and 5-second Flame Failure Response Time (FFRT) for more reliable startups, even in cold weather.
- Power's Out, Heat's On. Never worry about being cold during a power outage again! All Regency gas fireplaces operate without electricity. Enjoy peace of mind all winter long.

*Not available for L234, U31, E33, Gi29LU.

REMOTE CONTROL - INCLUDED



Proflame I GTMF Remote Control

*May be black on select models.



Proflame II GTMF Remote Control

Create optimal comfort with ease and convenience at the touch of a button with a Regency remote control. Our **user-friendly programmable controls** can be set, adjusted, and programmed for your fireplace to turn on at the temperature you want, when you want it.

FEATURE	DESCRIPTION	PROFLAME REMOTES		
		GT	GTM	GTMF
On/off		✓	✓	✓
Child lock		✓	✓	✓
LCD backlit screen		✓	✓	✓
Temperature display	°F / °C	✓	✓	✓
Thermostat	one setting (all days)	✓	✓	✓
Smart thermostat**		✓	✓	✓
Flame adjustment	(6 levels)	•	✓	✓
Fan control	(6 levels)	•	•	✓


• Not available

✓ Standard

**Smart Thermostat - Rather than a thermostat that simply turns your fireplace on and off, the smart control function allows you to set your desired room temperature. As the room reaches your personal setting, the flame intensity and heat will gradually decrease - keeping the ambiance of your Regency fire on with less heat output, and the option to turn it off at any time.

SAFETY SCREEN

Regency has integrated a custom designed safety screen into each faceplate design that meets or exceeds current North American safety legislation.



APP CONTROL*


The optional Wifi enabled module provides the ultimate fireplace control with the ProFlame Connect Plus App.




*Available on select units.

Gi25, Gi27, Gi29 & Gi33 SPECIFICATIONS

Three-Sided Faceplate

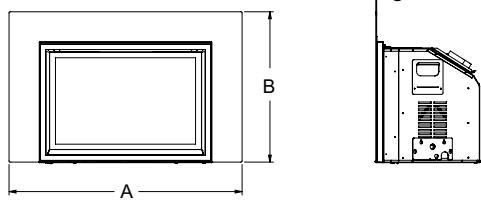

Four-Sided Faceplate

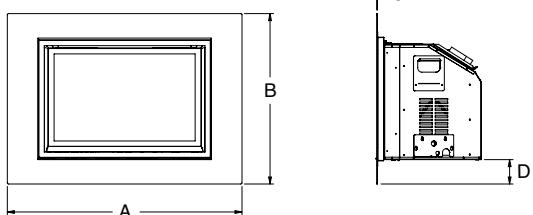


	FACEPLATE	DIMENSIONS		C - DEPTH	D - BOTTOM HEIGHT
		A - WIDTH	B - HEIGHT		
Gi25	Regular Faceplate	35-3/4"	23-1/4"	1-1/4"	--
	3-Sided Flush Faceplate	35-3/4"	23-1/4"	1/8"	--
	4-Sided Flush Faceplate	35-3/4"	26-3/8"	1/8"	4-3/16"
	Screen with 3-Sided Finishing Trim	28-1/4"	18-3/4"	1/16"	--
	Screen with 4-Sided Finishing Trim	28-1/4"	20"	1/16"	1-1/8"
	Oversized Backing Plate	44-5/8"	29-5/8"	1/8"	--
	3-Sided Custom Backing Plate	30-1/4"	19-3/4" - 44-7/8"	1/8"	--
	4-Sided Custom Backing Plate	30-1/4"	22-1/8" - 45"	1/8"	2-1/8" minimum
Gi27	Regular Faceplate	35-3/4"	23-1/4"	1-1/4"	--
	3-Sided Flush Faceplate	35-3/4"	23-1/4"	1/8"	--
	4-Sided Flush Faceplate	35-3/4"	26-3/8"	1/8"	3-5/8"
	Screen with 3-Sided Finishing Trim	31-7/8"	19-3/4"	1/16"	--
	Screen with 4-Sided Finishing Trim	30-1/4"	21"	1/16"	1-1/8"
	Oversized Backing Plate	44-5/8"	29-5/8"	1/8"	--
	3-Sided Custom Backing Plate	30-1/4" - 56-7/8"	19-3/4" - 44-7/8"	1/8"	--
	4-Sided Custom Backing Plate	30-1/4" - 69"	22-1/8" - 45"	1/8"	2-1/8"
Gi29	Regular Faceplate	40-3/16"	26"	1-1/4"	--
	Regular Faceplate w/ Premium Surround	40-13/16"	26-3/8"	1-11/16"	--
	3-Sided Flush Faceplate	40-3/16"	26"	1/8"	--
	4-Sided Flush Faceplate	40-3/16"	29-1/4"	1/8"	4-3/16"
	Screen with 3-Sided Finishing Trim	31-7/8"	21-7/8"	1/16"	--
	Screen with 4-Sided Finishing Trim	31-7/8"	23-1/8"	1/16"	1-1/8"
	Oversized Backing Plate	47-1/2"	31-1/2"	1/8"	--
	3-Sided Custom Backing Plate	33-7/8" - 56-7/8"	22-7/8" - 44-7/8"	1/8"	--
	4-Sided Custom Backing Plate	33-7/8" - 69"	25-1/8" - 45"	1/8"	2-1/8" minimum
	Flush Faceplate w/Traditional Surround	45-3/4"	28-3/4"	2-1/4"	--
Gi33	Regular Faceplate	46-5/16"	30-7/8"	1-5/16"	--
	Regular Faceplate w/ Premium Surround	46-3/4"	31-1/8"	1-11/16"	--
	3-Sided Flush Faceplate	46-1/8"	30-3/4"	1/8"	--
	4-Sided Flush Faceplate	46-1/8"	37-1/16"	1/8"	6"
	Screen with 3-Sided Finishing Trim	35-15/16"	25-11/16"	1/16"	--
	Screen with 4-Sided Finishing Trim	35-15/16"	26-15/16"	1/16"	1-1/8"
	Oversized Backing Plate	50-1/4"	33"	1/8"	--
	3-Sided Custom Backing Plate	38" - 56-7/8"	26-3/4" - 44-7/8"	1/8"	--
	4-Sided Custom Backing Plate	38" - 69"	29" - 45"	1/8"	2-1/8" minimum
	Flush Faceplate w/Traditional Surround	51-5/8"	30-3/4"	2-3/16"	--

NOTE: All product specifications are subject to change without notice.
Always refer to the relevant product manual for full and up-to-date information.


Gi25, Gi27, Gi29 & Gi33 SPECIFICATIONS

MINIMUM FIREPLACE DIMENSIONS

DIMENSIONS							
MODEL	A - HEIGHT	B - MAX. LINTEL BAR DEPTH	C - DEPTH	D - DAMPER OPENING	E - FRONT DEPTH TO TAPER	F - WIDTH (REAR)	G - WIDTH (FRONT)
Gi25	17"	10-1/2"	15"	8" x 4" min	1-5/8"	15"	25"
Gi27	18"	10-1/2"	15"	8" x 4" min	1-5/8"	17-1/2"	27"
Gi29	20-1/4"	11-3/8"	16-3/4"	8" x 4" min.	2-5/8"	20"	29"
Gi33	24"	12-1/4"	18"	9" x 5" min.	3-1/2"	22-3/8"	33"

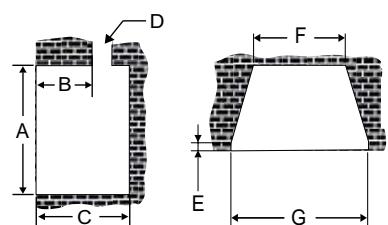


	FACEPLATE	DIMENSIONS				
		A - MINIMUM INSTALL WIDTH	B - MINIMUM INSTALL HEIGHT	C - MINIMUM INSTALL DEPTH	D - MINIMUM REAR WIDTH	E - TAPER DEPTH
Gi25	Regular Faceplate	25"	17"	15"	15"	1-5/8"
	Regular Faceplate w/ Backing Plate	26-3/4"	18-1/4"	15"	15"	3-1/8"
	Flush Faceplate	26-1/2"	18"	16-1/4"	15"	2-5/8"
	Flush Faceplate w/ Backing Plate	26-3/4"	18-1/8"	16-1/8"	15"	4"
	4-Sided Flush Faceplate	26-1/2"	18-1/8"	16-1-4"	15"	2-5/8"
	Finishing Trim	26-1/2"	18"	16-1-4"	15"	2-5/8"
	Finishing Trim w/ Backing Plate	26-1/4"	18-1/4"	16-1/8"	15"	4-1/4"
	4-Sided Finishing Trim	26-1/2"	18-1/8"	16-1/4"	15"	2-5/8"
Gi27	Regular Faceplate	27"	18"	15"	17-1/2"	1-5/8"
	Regular Faceplate w/ Backing Plate	29"	19-1/4"	14-7/8"	17-1/2"	3-1/8"
	Flush Faceplate	29"	19"	16-1/4"	17-1/2"	2-5/8"
	Flush Faceplate w/ Backing Plate	29"	19-1/4"	14-1/8"	17-1/2"	5/8"
	4-Sided Flush Faceplate	28-1/2"	19-1/4"	16-1/4"	17-1/2"	2-5/8"
	Finishing Trim	28-1/2"	19"	16-1/4"	17-1/2"	2-5/8"
	Finishing Trim w/ Backing Plate	29"	19-1/4"	16-1/8"	17-1/2"	4-1/2"
	4-Sided Finishing Trim	28-1/2"	19-1/4"	16-1/4"	17-1/2"	2-5/8"
Gi29	Regular Faceplate	28-7/16"	20-1/4"	16-11/16"	20"	2-13/16"
	Regular Faceplate w/ Backing Plate	30-7/8"	21-7/16"	16-3/4"	20"	2-11/16"
	Regular Faceplate w/ Premium Surround	28-7/16"	20-1/4"	16-5/8"	20"	2-5/8"
	Regular Faceplate w/ Premium Surround and Backing Plate	30-7/8"	21-7/16"	16-1/2"	20"	2-1/2"
	Flush Faceplate	30"	21-1/16"	17-15/16"	20"	3-7/8"
	Flush Faceplate w/ Backing Plate	30-7/8"	21-7/16"	17-13/16"	20"	3-3/4"
	4-Sided Flush Faceplate	30"	21-5/16"	17-15/16"	20"	3-7/8"
	Finishing Trim	30"	21-1/16"	18"	20"	3-15/16"
Gi33	Finishing Trim w/ Backing Plate	30-7/8"	21-7/16"	17-7/8"	20"	3-7/8"
	4-Sided Finishing Trim	30"	21-5/16"	18"	20"	3-15/16"
	Flush Faceplate w/Traditional Surround	28-7/16"	20-1/4"	15-15/16"	20"	1-7/8"
	Regular Faceplate	33"	24"	18"	22-3/8"	3-1/2"
	Regular Faceplate w/ Backing Plate	30-7/8"	21-7/16"	17-7/8"	22-3/8"	2-11/16"
	Regular Faceplate w/ Premium Surround	28-7/16"	20-1/4"	17-3/4"	22-3/8"	2-5/8"
	Regular Faceplate w/ Premium Surround and Backing Plate	30-7/8"	21-7/16"	17-5/8"	22-3/8"	2-1/2"
	Flush Faceplate	30"	21-1/16"	19-3/16"	22-3/8"	3-7/8"

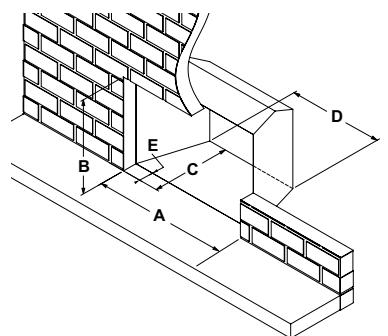


DIMENSIONS


LRI6E, HRI4E, LRI4E, HRI3E, LRI3E, E33, L234, U31 SPECIFICATIONS




FRONT VIEW



TOP VIEW



SIDE VIEW OF HRI6E,
LRI6E, HRI4E, LRI4E,
HRI3E, LRI3E, E33, L234



SIDE VIEW
OF U31

UNIT	A	B	A1	B1	C	D	F	G
HRi6E	33-15/16"	23-5/8"	28-3/16"	18-5/16"	19-3/16"	14-11/16"	--	24-1/2"
LRi6E	33-15/16"	23-5/8"	28-3/16"	18-5/16"	19-3/16"	14-11/16"	--	24-1/2"
HRi4E	30"	20"	24-3/16"	14-3/4"	17-7/8"	14-5/16"	--	21-11/16"
LRi4E	30"	20"	24-3/16"	14-3/4"	17-7/8"	14-5/16"	--	21-11/16"
HRi3E	28"	19"	22-11/16"	14-1/4"	14"	10-3/8"	--	21-1/4"
LRi3E	28"	19"	22-11/16"	14-1/4"	14"	10-3/8"	--	21-1/4"
E33	32-1/4"	23-3/4"	30-3/8"	14-3/4"	16-1/4"	11-1/16"	--	24-1/2"
U31	26-1/16"	20-1/4"	24-1/2"	13"	13-1/2"	11"	11/16"	22-1/2"
L234	24-3/4"	16-7/8"	17-3/4"	12-1/2"	14-11/16"	11-3/4"	--	14-3/4"


BACKING PLATE DIMENSIONS

BACKING PLATE	HRi6E		LRi6E		HRi4E		LRi4E		HRi3E		LRi3E	
	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT
Small	41"	27-3/4"	41"	27-3/4"	37-1/8"	23-5/8"	37-1/8"	23-5/8"	31-1/4"	23-3/8"	31-1/4"	23-3/8"
Regular (3-sided)	47-3/8"	30-1/2"	47-3/8"	30-1/2"	41-5/8"	26"	41-5/8"	26"	35-3/4"	25-5/8"	35-3/4"	25-5/8"
Regular (4-sided)	47-3/8"	34-1/8"	47-3/8"	34-1/8"	41-5/8"	29-1/4"	41-5/8"	29-1/4"	35-3/4"	28-5/8"	35-3/4"	28-5/8"
Oversized	48-3/8"	33"	48-3/8"	33"	44"	30"	44"	30"	38-3/16"	29-5/8"	38-3/16"	29-5/8"
Custom Backing Plate	Custom Order Only											

BACKING PLATE	HRi6E/LRI6E			HRi4E/LRI4E			HRi3E/LRI3E		
	WIDTH	CENTRE HEIGHT	CORNER HEIGHT	WIDTH	CENTRE HEIGHT	CORNER HEIGHT	WIDTH	CENTRE HEIGHT	CORNER HEIGHT
Arched	50-7/8"	33-1/16"	29-13/16"	45-7/8"	28-15/16"	25-15/16"	40-15/16"	27-11/16"	24-1/2"

SPECIFICATIONS

LRI6E, HRI4E, LRI4E, HRI3E, LRI3E, E33, L234, U31 SPECIFICATIONS

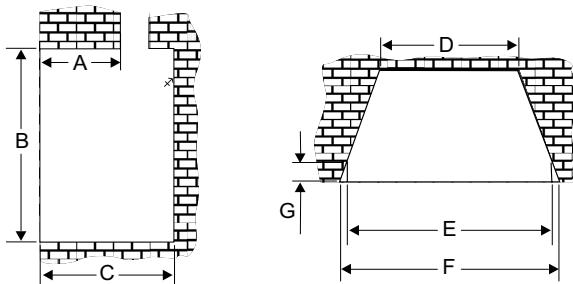

MINIMUM FIREPLACE OPENINGS		A	B	C	D	E	F	G	
HRi6E	Vignette Faceplate	12-1/2"	24"	19-1/2"	25"	34"	37"	4-3/4"	
	Vignette Faceplate + Spacer	10"	24"	16-3/4"	25"	34"	35-3/8"	2-1/4"	
	Arched Vignette Faceplate	13-1/2"	25-3/4"	22-3/8"	25"	35-3/4"	37"	6"	
	Arched Vignette Faceplate + Spacer	12"	24"	19-1/2"	25"	34"	36-1/4"	4-3/4"	
LRi6E	Vignette Faceplate	12-1/2"	24"	19-1/2"	25"	34"	37"	4-3/4"	
	Vignette Faceplate + Spacer	10"	24"	16-3/4"	25"	34"	35-3/8"	2-1/4"	
	Arched Vignette Faceplate	13-1/2"	25-3/4"	22-3/8"	25"	35-3/4"	37"	6"	
	Arched Vignette Faceplate + Spacer	12"	24"	19-1/2"	25"	34"	36-1/4"	4-3/4"	
HRi4E	Vignette Faceplate	12-1/4"	20"	18"	22"	30"	35-5/8"	4-3/8"	
	Vignette Faceplate + Spacer	10"	20"	15-3/4"	22"	30"	31-1/4"	2-1/8"	
	Arched Vignette Faceplate	14"	21-1/2"	21-1/8"	22"	30-1/2"	37"	5-3/8"	
	Arched Vignette Faceplate + Spacer	12-1/2"	20"	17-1/2"	22"	30"	36-1/4"	4"	
LRi4E	Vignette Faceplate	12-1/4"	20"	18"	22"	30"	35-5/8"	4-3/8"	
	Vignette Faceplate + Spacer	10"	20"	15-3/4"	22"	30"	31-1/4"	2-1/8"	
	Arched Vignette Faceplate	14"	21-1/2"	21-1/8"	22"	30-1/2"	37"	5-3/8"	
	Arched Vignette Faceplate + Spacer	12-1/2"	20"	17-1/2"	22"	30"	36-1/4"	4"	
HRi3E	Vignette Faceplate	8-5/8"	19-1/2"	14-1/2"	21-5/8"	28-1/2"	31-1/8"	4"	
	Arched Vignette Faceplate	8-5/8"	19-1/2"	14-1/2"	21-5/8"	28-5/8"	31-1/8"	4"	
LRi3E	Vignette Faceplate	8-5/8"	19-1/2"	14-1/2"	21-5/8"	28-1/2"	31-1/8"	4"	
	Arched Vignette Faceplate	8-5/8"	19-1/2"	14-1/2"	21-5/8"	28-5/8"	31-1/8"	4"	
E33	Low Profile Faceplate	9-1/4"	25-1/2"	18"	25"	N/A	35-1/4"	N/A	
	Low Profile Faceplate + Spacer	8"	24-3/16"	16-3/4"	25"	N/A	32-1/4"	N/A	
U31	Low Profile Faceplate	8-1/8"	21"	15"	22-1/2"	N/A	26-1/2"	N/A	
L234	Low Profile Faceplate	N/A		17"	14" (with spacer) 15-5/8" (without spacer)	16"	N/A	25"	N/A

A - Max. lintel bar depth

G - Front depth prior to taper

FACEPLATES	HRi6E		LRi6E		HRi4E		LRi4E		HRi3E		LRi3E	
	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT
Vignette and Rustic Vignette	40-1/16"	26-13/16"	40-1/16"	26-13/16"	35-1/16"	22-11/16"	35-1/16"	22-11/16"	29-1/4"	22-1/8"	29-1/4"	22-1/8"
Vignette Spacer	39-15/16"	26-3/4"	39-15/16"	26-3/4"	34-15/16"	22-5/8"	34-15/16"	22-5/8"	--	--	--	--
Hearth Trim - Sizes	Please See Manual For Details											

FACEPLATES	HRi6E/LRi6E			HRi4E/LRi4E			HRi3E/LRi3E		
	WIDTH	CENTRE HEIGHT	CORNER HEIGHT	WIDTH	CENTRE HEIGHT	CORNER HEIGHT	WIDTH	CENTRE HEIGHT	CORNER HEIGHT
Arched Vignette	45-3/8"	30-7/16"	27-13/16"	40-1/4"	26-1/8"	23-3/4"	35-15/16"	25-3/16"	22-3/4"
Spacer	45-3/8"	30-7/16"	27-13/16"	40-1/4"	26-1/8"	23-3/4"	--	--	--

NOTE: All product specifications are subject to change without notice. Always refer to the relevant product manual for full and up-to-date information.

DIMENSIONS

FACEPLATES	E33		U31		L234	
	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT
Vignette (3-Sided)	46-1/2"	28-3/4"	--	--	--	--
Vignette (4-Sided)	46-1/2"	30-7/8"	--	--	--	--
Custom Faceplate (3-Sided Vignette Only)	Custom Order Only	--	--	--	--	--
Spacer (3-Sided Vignette Only)	45"	28"	--	--	--	--
Low Profile (3-Sided)	Front Plate	42-7/16"	26-3/4"	36"	22-1/8"	29-1/8"
	Rear Plate	46-1/2"	28-11/16"	40-13/16"	24"	32-7/8"
Low Profile (3-Sided Oversize)	Front Plate	42-7/16"	26-3/4"	--	--	--
	Rear Plate	49-9/16"	33-1/8"	--	--	--
Low Profile (3-Sided) Custom	Rear Plate	Custom Order Only				
Low Profile (4-Sided) Custom	Rear Plate	Custom Order Only				
Hearth Trim - Sizes	Please See Manual For Details					


MINIMUM CLEARANCES

MINIMUM CLEARANCE TO COMBUSTIBLES	Gi25LE	Gi27LE	Gi29LE	Gi29LU	Gi33LE
A Side Wall	8"	8"	8"	8"	8"
B Ceiling	60"	60"	60"	60"	60"
C Mantel Height (Min.)	29-5/8"	30"	32-3/4"	32-3/4"	36-1/2"
(With Optional Deflector)	26-5/8"	28"	30-3/4"	30-3/4"	34-1/2"
D Mantel Depth (Min.)	1-1/2"	9"	1-1/2"	1-1/2"	1-1/2"
(With Optional Deflector)	1-1/2"	9"	1-1/2"	1-1/2"	1-1/2"
E Alcove Width	54"	54"	54"	54"	56"
F Max. Alcove Depth	36"	36"	36"	36"	36"

NON-COMBUSTIBLE HEARTH REQUIREMENT

G	Hearth Height	0"	0"	0"	0"	*0-2"
H	Hearth Width	0"	0"	0"	0"	*36"
I	Hearth Depth	0"	0"	0"	0"	*12"

* Hearth not required if appliance is raised off the ground 2" from Finished Floor.

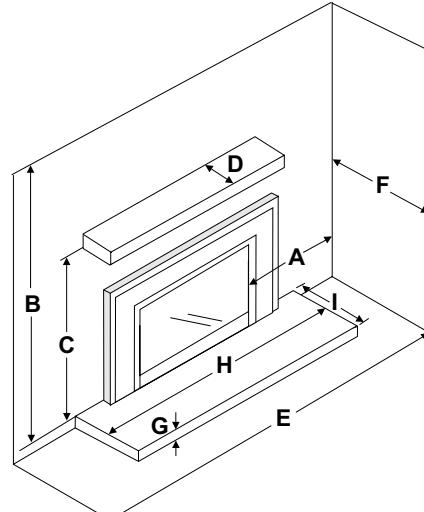

MINIMUM CLEARANCE TO COMBUSTIBLES	HRi6E	LRi6E	HRi4E	LRi4E	HRi3E	LRi3E	E33	U31	L234
A Side Wall	12"	12"	8"	8"	6"	6"	8"	10"	8"
B Ceiling	60"	60"	60"	60"	60"	60"	72"	67"	73"
C Mantel Height (Min.)	40"	40"	35"	35"	38"	38"	40"	32-1/2"	38"
(With Optional Deflector)	36"	36"	32"	32"	28"	28"	N/A	N/A	N/A
D Mantel Depth (Min.)	1"	1"	1"	1"	1"	1"	0 - 3-1/2"	0 - 3-1/2"	1"
(With Optional Deflector)	1"	1"	1"	1"	1"	1"	N/A	N/A	N/A
E Alcove Width	56"	56"	54"	54"	54"	54"	76"	48"	60"
F Max. Alcove Depth	36"	36"	36"	36"	36"	36"	36"	36"	36"


NON-COMBUSTIBLE HEARTH REQUIREMENT

G	Hearth Height	1-3/8"	1-3/8"	1/2"	1/2"	1/2"	1/2"	1-1/4"	0"	1-1/2"
H	Hearth Width	44"	44"	40"	40"	36"	36"	45-1/2"	0"	28"
I	Hearth Depth	14"	14"	14"	14"	12"	12"	13"	0"	12"

NOTE: All product specifications are subject to change without notice. Always refer to the relevant product manual for full and up-to-date information.



Find More Products at **REGENCY-FIRE.COM**



©2024 FPI Fireplace Products International Ltd. Regency®, Regency Liberty®, Regency Horizon®, Regency Energy™ and Surefire™ are registered or proprietary trademarks of FPI Fireplace Products International Ltd. All rights reserved.
Printed in Canada (07/25) Part no. 944-072

Your Regency Dealer



GAS STOVES



regency-fire.com

REGENCY CONTURA RC500E

Medium Gas Stove



RC500E shown in black cast with volcanic stones and rear venting (unit shown without mandatory safety screen).

3-SIDED GAS STOVE

The Regency Contura RC500E gas stove boasts a sleek and fresh design that complements any contemporary space. The fire is presented in a curved 3-sided panoramic view where clean lines and monochrome colors serve to emphasize the tall and radiant flames. Available in black or white, you can customize this modern gas stove with a bed of crushed glass, volcanic stones or a traditional log.

SPECIFICATIONS	NATURAL GAS	PROPANE
Maximum BTU	23,000	22,000
Turn down to (BTU)	16,000	18,000
Efficiency (steady state)	67.13%	66.85%
EnerGuide rating (Canada only)	60.38%	61.42%



RC500E shown in white cast with glass door & top with traditional logs and top venting (unit shown without mandatory safety screen).

STANDARD FEATURES

- View the stunning flame from three sides
- Interior lights for added ambiance
- Variable speed blower
- Natural gas
- Safety screen
- Electronic ignition with remote control
- Modulating flame adjustment
- Battery back up system keeps the heat on in the event of a power outage
- Direct vent
- Reversible flue for top or rear venting

OPTIONS

- Available in black cast or white with glass door & top
- Your choice of crystals, volcanic stones or traditional logs
- Propane conversion kit
- AstroCap® venting system
- Vertical or horizontal direct vent terminations



RC500E shown with safety screen

REGENCY ULTIMATE™ U38 • U39 • U39E

Medium Gas Stoves



U39E shown with wrap around brushed nickel door, brushed nickel louvers and traditional log set (unit shown without mandatory safety screen).

MODERN FIRE

The Ultimate Gas Stoves Series is framed with clean, modern lines that provide exceptional views of a stunning fire accentuated by the wraparound design to enhance your enjoyment of the flames. With controllable heat settings, your Ultimate fire can be set to the maximum to provide high efficiency or turned down to maintain ambiance with less heat. Warm-up your kitchen, bedroom, or den with these efficient and versatile gas stoves.

SPECIFICATIONS (NATURAL GAS)	U38	U39	U39E
Maximum BTU	38,000	38,000	38,000
Turn down to (BTU)	26,000	26,000	26,000
Efficiency (steady state)	71.63%	77%	77%
EnerGuide rating (Canada only)	63.94%	73.45%	73.45%

SPECIFICATIONS (PROPANE)	U38	U39	U39E
Maximum BTU	34,000	38,000	38,000
Turn down to (BTU)	27,500	30,000	30,000
Efficiency (steady state)	71.71%	77.80%	77.80%
EnerGuide rating (Canada only)	64.59%	75.68%	75.68%



U38 shown with wrap around black door, black louvers and driftwood log set (unit shown without mandatory safety screen).

STANDARD FEATURES

- Natural gas
- Safety screen
- Flame height adjustment
- Electronic Ignition (U39E)
- Millivolt system with proflame remote control (U38, U39)
- Proflame II Remote Control (U39E)
- B-vent (U38)
- Direct Vent (U39, U39E)
- Black steel pedestal
- Variable speed blower
- 1-piece wrap around door in brushed nickel or black
- Battery back up system keeps the heat on in the event of a power outage

OPTIONS

- Choose between natural oak or driftwood logs
- Brushed nickel or black louvers
- Wall thermostat
- BTU reduction kit
- Propane conversion kit
- AstroCap® venting system (U39, U39E)
- Vertical or horizontal direct vent terminations (U39, U39E)



U38 shown with safety screen

REGENCY HAMPTON H15 • H27 • H35

Small, Medium & Large Gas Stoves



H27 shown with decorative glass grille in charcoal gray finish.

HIGH-EFFICIENCY HEAT

Our Hampton series of gas stoves combines the timeless charm of cast iron stoves with unmatched fire and log packages for a truly stunning experience. Enjoy the ultimate convenience of instant gas fire at the touch of a button with the mesmerizing view of tall flames in a freestanding cast iron stove. Available in three sizes, Hampton gas stoves bring warmth to your home while providing high efficiency heat to save money on heating bills.

SPECIFICATIONS (NATURAL GAS)	H15 SMALL	H27 MEDIUM	H35 LARGE
Maximum BTU	18,000	25,000	30,000
Turn down to (BTU)	12,700	18,000	21,500
Efficiency (steady state)	61.97%	67.63%	75.27%
EnerGuide rating (Canada only)	55.33%	61.22%	70.86%

SPECIFICATIONS (PROPANE)	H15 SMALL	H27 MEDIUM	H35 LARGE
Maximum BTU	18,000	22,000	29,500
Turn down to (BTU)	15,500	17,500	24,000
Efficiency (steady state)	63.69%	66.51%	75.77%
EnerGuide rating (Canada only)	57.46%	63.07%	71.97%



H35 shown with decorative glass grille in timberline brown enamel finish.

STANDARD FEATURES

- Natural Gas
- Accent light
- ProFlame II remote control (GTMFL)
- Thermostat (built into remote)
- Modulating flame adjustment
- Light
- Safety screen
- Cast grille
- Ceramic glass
- Reversible flue for top or rear venting

OPTIONS

- Charcoal gray or timberline brown enamel finish
- Brick panels in red or brown (H35)
- Variable speed blower
- Wall thermostat
- AstroCap® venting system
- Color match vent paint
- Propane conversion kit
- Standing pilot models available in select regions

REGENCY CLASSIC™ C34 • C34E

Small Gas Stove



C34 shown with black legs, black door and safety screen.

CLASSIC FIRE

The Regency Classic gas stoves seamlessly blends the classic aesthetics of wood stoves with the modern convenience of gas. These stoves do not require an existing chimney and can be installed with a direct vent to use outside air for combustion, allowing your home to maintain an everlasting cozy ambiance. This Classic series, like all Regency gas stoves, operates safely without electricity - keeping you warm with radiant heat.

SPECIFICATIONS (NATURAL GAS)	C34	C34E
Maximum BTU	32,000	32,000
Turn down to (BTU)	21,000	21,000
Efficiency (steady state)	71.68%	71.68%
EnerGuide rating (Canada only)	n/a	64.89%

SPECIFICATIONS (PROPANE)	C34	C34E
Maximum BTU	29,000	29,000
Turn down to (BTU)	23,000	23,000
Efficiency (steady state)	72.02%	72.03%
EnerGuide rating (Canada only)	n/a	65.82%

STANDARD FEATURES

- Natural gas or propane
- Beautiful fire with glowing logs
- Safety screen
- Flame height adjustment
- Millivolt system with Proflame remote control (C34)
- Electronic Ignition with Proflame II remote control (C34E)
- Direct Vent
- Convector Airmate
- Heavy-duty ceramic safety glass
- Battery back up system keeps the heat on in the event of a power outage


OPTIONS

- Wall thermostat
- Variable speed blower
- Black steel pedestal base
- Cast iron door in black** or nickel accent
- Cast iron legs in brushed nickel or black
- Bottom heat shield (when using legs)
- AstroCap® venting system
- Vertical or horizontal direct vent terminations


** Black doors come with black wood handles & black hinge caps

SPECIFICATIONS


DIMENSIONS

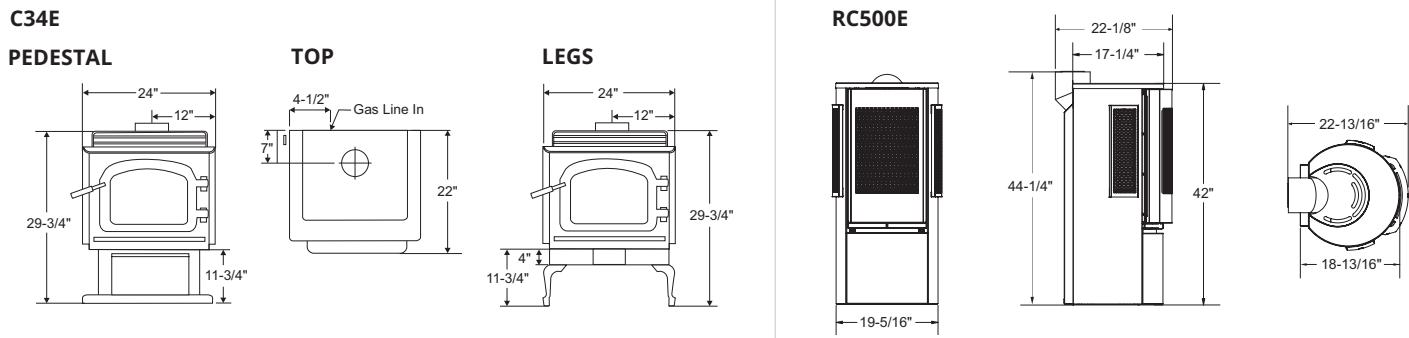

U38, U39 FRONT & SIDE

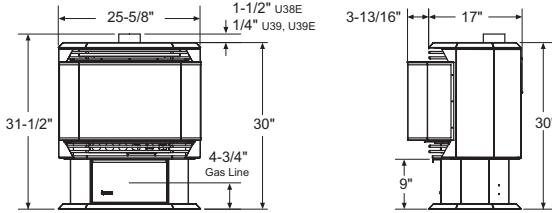


H15, H27, H35 FRONT & SIDE



	H15	H27	H35
A	20-11/16"	24-9/16"	27-1/2"
B	23-1/8"	27-3/16"	28-1/8"
C	14-1/4"	15-5/8"	21-3/16"
D	17-13/16"	18-13/16"	22-13/16"
Shipping Weight	198 lbs	227 lbs	322 lbs

VENTING OPTIONS

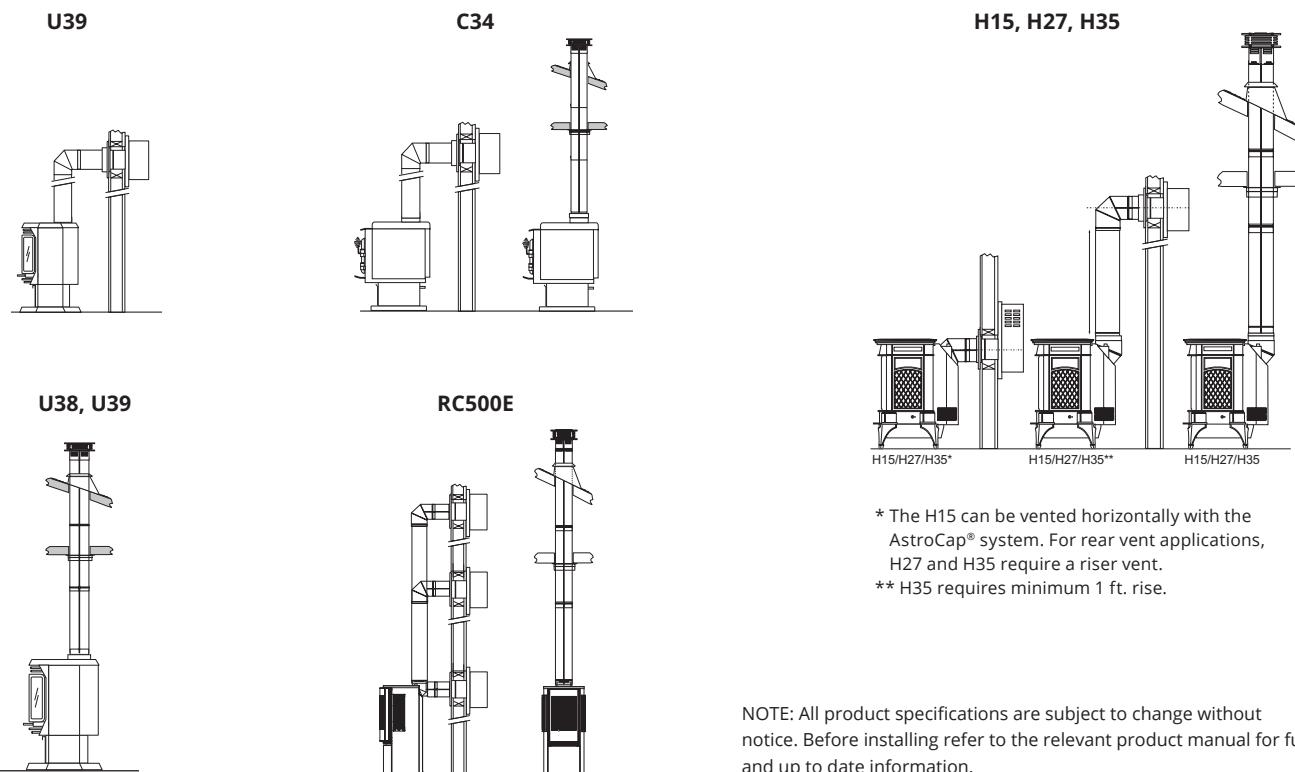


* The H15 can be vented horizontally with the AstroCap® system. For rear vent applications, H27 and H35 require a riser vent.

** H35 requires minimum 1 ft. rise.

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up to date information.

CLEARANCES


CLEARANCES TO COMBUSTIBLES - U38, U39 & C34

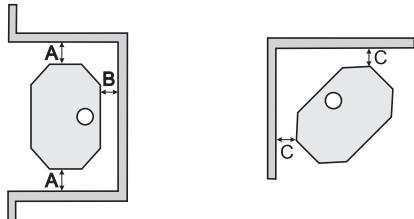

CLEARANCES TO COMBUSTIBLES	U38 B-VENT	U39 DV TOP	C34 DV
A - Side Wall To Unit	7-1/2"	7-1/2"	10"
B - Back Wall To Unit	6"	6"	6"
C (corner) - Side Wall to Unit	2"	2"	1-1/2"


B* - Rear wall clearance is a temperature issue and necessary for drafting purposes. Do not reduce clearance under any circumstances.

CLEARANCES - RC500E

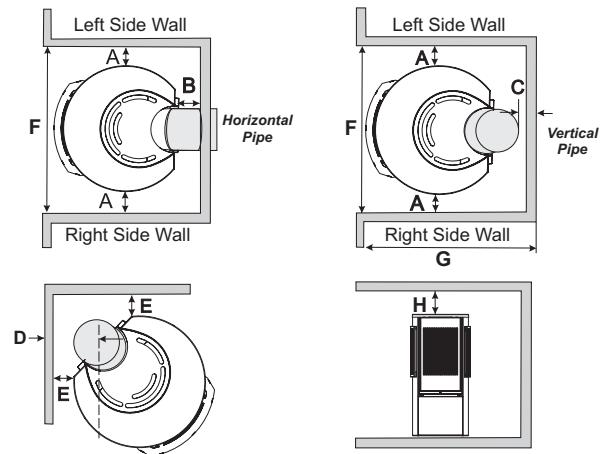

CLEARANCES		
A	Left/Right Side Wall to Unit	9"
B	Back Wall to Unit	2"
C	Vertical Vent Pipe to Back Wall	2"
D	Wall to Centerline of Pipe	8-3/4"
E	Unit Corner to Wall (Top Vent)	4"
	Unit Corner to Wall (Rear Vent)	5-3/4"
F	Alcove Width	50"
G	Alcove Depth	36"
H	Minimum Ceiling from Top of Unit	15"

CLEARANCES - H15, H27, H35

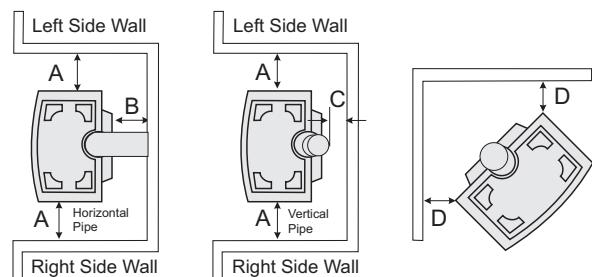

CLEARANCES TO COMBUSTIBLES	H15	H27	H35
A - Side Wall To Unit	6"	6"	6-1/2"
B - Back Wall To Unit	0**	3"	6"
C - Vertical Vent to Back Wall	2"	2"	2"
D - Side Wall To Unit (Corner)	2"	2"	2"

Minimum clearance of vent terminal to outside corner and inside corner:
AstroCap® 6", Dura-Vent Cap 12".

*It is recommended that the unit is moved away from wall, if installing the blower option so the fan can be easily installed/serviced.

OPTIONS

FEATURES & ACCESSORIES	RC500E	C34	C34E	U39	U39E	U38	H15U	H15E	H27U	H27E	H35U	H35E
Standing Pilot*	•	✓	•	✓	•	✓	✓	•	✓	•	✓	•
Electronic Ignition	✓	•	✓	•	✓	•	•	✓	•	✓	•	✓
Handheld Remote GTMF	✓	✓	✓	✓	✓	✓	•	✓	•	✓	•	✓
Handheld On/Off Thermostat Remote	•	•	•	•	•	•	*910-399	•	*910-399	•	*910-399	•
On/Off Switch	•	•	•	•	•	•	✓	•	✓	•	✓	•
Flame Modulation	✓	✓	✓	✓	✓	✓	manual	✓	manual	✓	manual	✓
Stepper Motor	✓	✓	✓	✓	✓	✓	•	✓	•	✓	•	✓
Fan Kit	✓	★	★	✓	✓	✓	★	★	★	★	★	★
Fan Control	remote	remote	remote	remote	remote	remote	manual	remote	manual	remote	manual	remote
Wall Thermostat	Basic - 911-138	★	★	★	★	★	★	★	★	★	★	★
	Programmable - 910-404/p	★	★	★	★	★	★	★	★	★	★	★

• Not available ✓ Standard ★ Optional

*Standing Pilot 821 models available in select regions.

COMFORT CONTROLS



Fire Genie Remote



Proflame remote



Proflame II remote



Programmable Wall Thermostat

Turn your fire on and off with our comfort remote controls. They can be used as a thermostat, allowing you to set and automatically maintain the desired temperature no matter where in the room you are sitting.

A Regency wall thermostat is a hands-free solution that helps you maintain a constant temperature in your home. Choose the programmable wall thermostat and set different temperatures throughout the day to match your lifestyle.

MAXIMIZING COMFORT AND EFFICIENCY

Direct vent technology allows you to install a Regency stove almost anywhere in your home - no chimney is needed. From the top of the unit, simply vent your stove through an exterior wall. Direct vent units have a sealed combustion chamber; outside air is used for combustion resulting in a warmer home and improved indoor air quality.

ENJOY YOUR REGENCY — FOR LIFE

You'll be happy with your Regency for years to come; our Limited Lifetime Warranty guarantees it.

Not only have we invested in quality workmanship, the finest materials, and durable, heavy-duty


construction, but we have carefully selected a dealer network that is committed to your satisfaction.

We know that you will be as proud of your Regency as we are.





Find More Products at **REGENCY-FIRE.COM**



Your Regency Dealer

© 2025 FPI Fireplace Products International Ltd. Regency®, Regency Ultimate™, Regency Classic™, Hampton®, Contura™ and AstroCap® are the registered and/or proprietary trademarks of FPI Fireplace Products International Ltd.

Printed in Canada (06/25) Part no. 944-220

Version No: 2025-2



GAS LOGS



regency-fire.com

Gas Logs

INDOOR • Vented & Vent-Free

Enjoy all the benefits of a wood-burning fireplace without the extra time and effort.

Forget about chopping, storing, and hauling wood. Simply turn on the gas logs and enjoy the ambiance and warmth of an amazing fire whenever you desire.

Our Regency Vented and Vent-Free Gas Logs provide a range of options that replicate the natural beauty of a log with meticulous attention to detail. When paired with our high-quality burners, our individually cast and hand-painted logs provide enchanting flame patterns that create a serene and breathtaking view. Immerse yourself in the comfort of a beautiful, realistic fire as you create unforgettable memories with your loved ones.



TABLE OF CONTENTS

Indoor Vented Gas Logs

Oak **04**

Driftwood **05**

Birch **06**

Indoor Vent-Free Gas Logs (*USA* Only*)

Oak **08**

Birch **09**

Options **11**

* Some regional restrictions may apply.

INDOOR VENTED GAS LOGS – OAK

Available in 3 Sizes



30" Oak logs with Indoor Vented Burner.



Vented 18" Oak Logs
GL18V



Vented 24" Oak Logs
GL24V



Vented 30" Oak Logs
GL30V

FEATURES

- Durable logs made of high-temperature concrete, ceramic refractory, and stainless-steel fiber mesh
- Oak Logs are available in sizes 18", 24", and 30"
- Millivolt* and Electronic Ignition control systems available
- 18" available with Indoor Vented 2-Burner
- 24" and 30" available with Indoor Vented 3-Burner

MINIMUM FIREPLACE OPENING	2-BURNER MILLIVOLT*		3-BURNER MILLIVOLT + ELECTRONIC		
	18"	18"	18"	24"	30"
Width (front)	30"		36"	36"	42"
Width (rear)	18"		24"	24"	30"
Height	14"		14"	16"	16"
Depth	14"		14"	14"	16"

* Some regional restrictions may apply.

INDOOR VENTED GAS LOGS – DRIFTWOOD

Available in 3 Sizes



30" Driftwood logs with Indoor Vented Burner.



Vented 18" Driftwood Logs
GL18V



Vented 24" Driftwood Logs
GL24V



Vented 30" Driftwood Logs
GL30V

FEATURES

- Durable logs made of high-temperature concrete, ceramic refractory, and stainless-steel fiber mesh
- Driftwood Logs are available in sizes 18", 24", and 30"
- Millivolt* and Electronic Ignition control systems available
- 18" available with Indoor Vented 2-Burner
- 24" and 30" available with Indoor Vented 3-Burner

MINIMUM FIREPLACE OPENING	2-BURNER MILLIVOLT*		3-BURNER MILLIVOLT + ELECTRONIC	
	18"	24"	18"	24"
Width (front)	30"	36"	36"	42"
Width (rear)	18"	24"	24"	30"
Height	14"	14"	14"	16"
Depth	14"	14"	14"	16"

* Some regional restrictions may apply.

INDOOR VENTED GAS LOGS – BIRCH

Available in 3 Sizes



30" Birch logs with Indoor Vented Burner.



Vented 18" Birch Logs
GL18V



Vented 24" Birch Logs
GL24V



Vented 30" Birch Logs
GL30V

FEATURES

- Durable logs made of high-temperature concrete, ceramic refractory, and stainless-steel fiber mesh
- Birch Logs are available in sizes 18", 24", and 30"
- Millivolt* and Electronic Ignition control systems available
- 18" available with Indoor Vented 2-Burner
- 24" and 30" available with Indoor Vented 3-Burner

MINIMUM FIREPLACE OPENING	2-BURNER MILLIVOLT*		3-BURNER MILLIVOLT + ELECTRONIC	
	18"	24"	18"	24"
Width (front)	30"	36"	36"	42"
Width (rear)	18"	24"	24"	30"
Height	14"	14"	16"	16"
Depth	14"	14"	14"	16"

* Some regional restrictions may apply.

ASSEMBLED INDOOR VENTED BURNERS

Our indoor vented burner systems feature factory-tested and installed control systems.

- **Millivolt***: Standing Pilot system, On/Off Remote
- **Electronic Ignition**: Pilot on demand, On/Off Remote
- Available for natural gas
- Propane conversion kit available
- All burners include lava rock, black embers, flex line, and a damper clamp
- **2-Burner**: Rear and Front burners will provide beautiful and even flame distribution
- **3-Burner**: Increased flame height and a middle burner to add flame depth

BTU RATINGS	2-BURNER		3-BURNER	
	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE
18" GL18V	52,000	49,000	--	--
24" GL24V	--	--	74,000	64,000
30" GL30V	--	--	102,000	91,000

GL18V BURNERS

2-BURNER - MILLIVOLT*



Available in size 18"

GL24V & GL30V BURNERS

3-BURNER - MILLIVOLT*



Available in size 24" & 30"

2-BURNER - ELECTRONIC IGNITION



Available in Size 18"

3-BURNER - ELECTRONIC IGNITION



Available in Size 24" & 30"

INDOOR VENT-FREE GAS LOGS – OAK

Available in 2 Sizes – **USA* ONLY**



24" Oak logs with Indoor Vent-Free Burner.



Vent-Free 18" Oak Logs
GL18VF



Vent-Free 24" Oak Logs
GL24VF

FEATURES


- Durable logs made of high-temperature concrete, ceramic refractory, and stainless-steel fiber mesh
- Oak Logs are available in sizes 18" and 24"
- Millivolt Variable and Electronic Ignition control systems available

MINIMUM FIREPLACE OPENING	18"	24"
Width (front)	22"	28"
Width (rear)	20"	20"
Height	18"	18"
Depth	13"	14"

* Some regional restrictions may apply.

INDOOR VENT-FREE GAS LOGS – BIRCH

Available in 2 Sizes – **USA* ONLY**

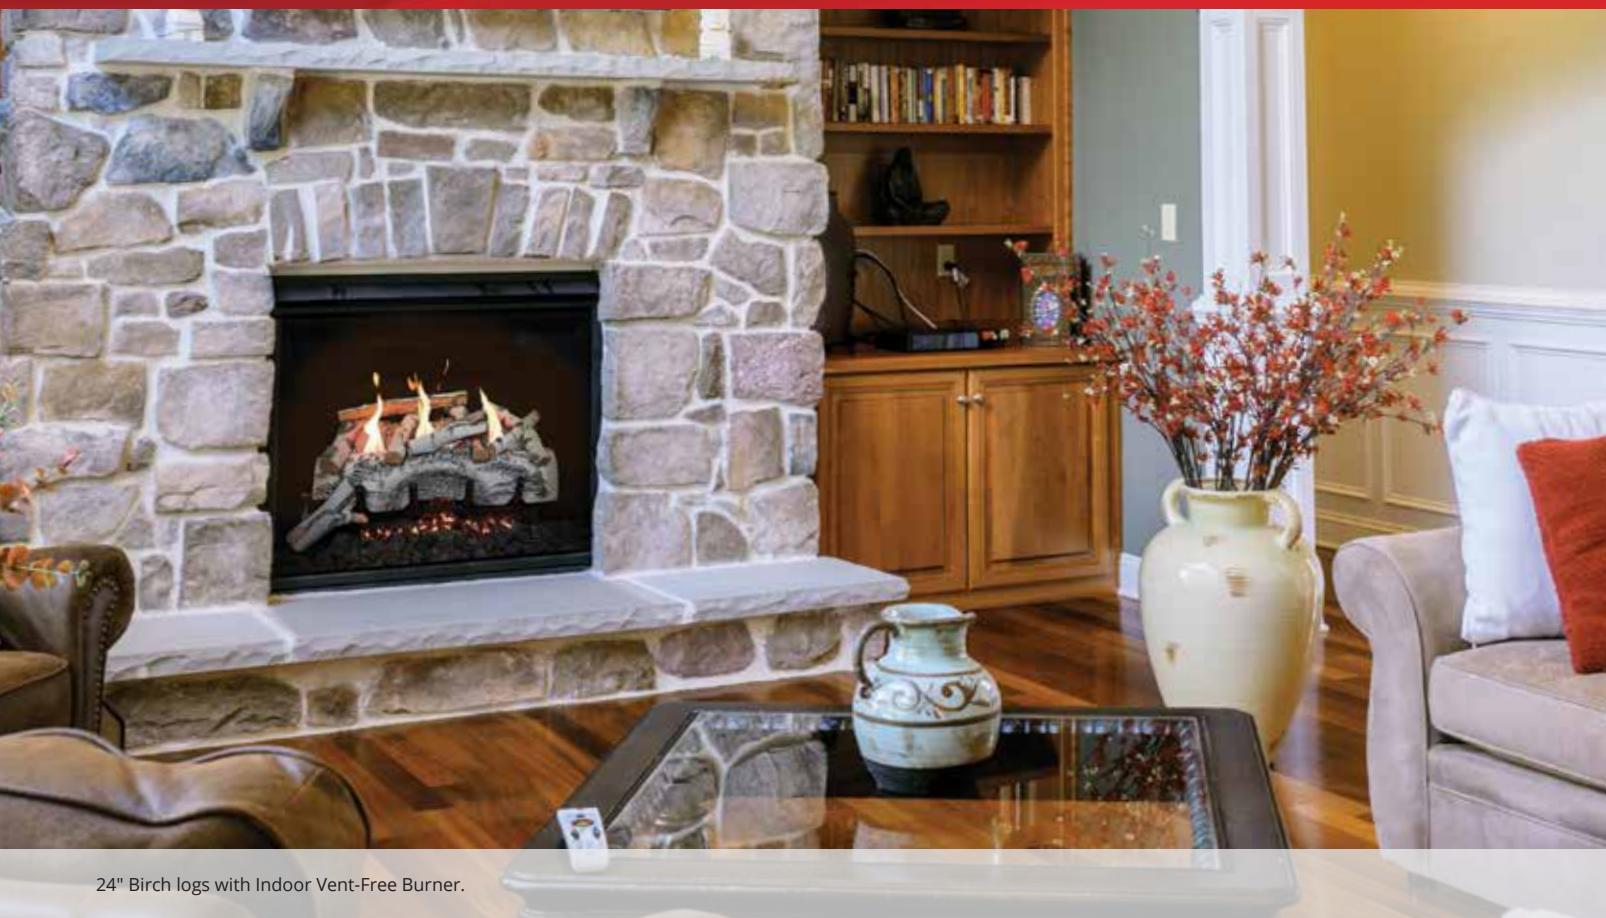

24" Birch logs with Indoor Vent-Free Burner.



Vent-Free 18" Birch Logs
GL18VF



Vent-Free 24" Birch Logs
GL24VF

FEATURES

- Durable logs made of high-temperature concrete, ceramic refractory, and stainless-steel fiber mesh
- Birch Logs are available in sizes 18" and 24"
- Millivolt Variable and Electronic Ignition control systems available

MINIMUM FIREPLACE OPENING	18"	24"
Width (front)	22"	28"
Width (rear)	20"	20"
Height	18"	18"
Depth	13"	14"

* Some regional restrictions may apply.

ASSEMBLED INDOOR VENT-FREE BURNERS

Our indoor vent-free burner systems feature factory-tested and installed control systems.

- **Millivolt Variable:** Manual spark standing pilot system, On/Off and flame adjustment remote
- **Electronic Ignition:** Pilot on demand, On/Off and flame adjustment remote
- Available for natural or propane gas
- All burners include lava rock, platinum embers, black embers, and flex line

SIZE	NATURAL GAS		PROPANE	
	BTU - LOW	BTU - HIGH	BTU - LOW	BTU - HIGH
18" GL18VF	26,000	35,000	24,000	32,000
24" GL18VF	19,000	37,000	19,000	37,000

GL18VF & GL24VF BURNERS

MILLIVOLT VARIABLE



Available in size 18" & 24"

ELECTRONIC IGNITION



Available in size 18" & 24"

OPTIONS

ACCESSORIES	VENTED			VENT-FREE	
	18"	24"	30"	18"	24"
Lava Rock - 10lbs bag	★	★	★	★	★
Black Embers - 6oz bag	★	★	★	★	★

- Not available
- ✓ Standard
- ★ Optional



Lava Rock



Black Embers

ENJOY YOUR REGENCY — FOR LIFE

You'll be happy with your Regency for years to come; our Limited Lifetime* Warranty guarantees it. Not only have we invested in quality workmanship, the finest materials, and durable, heavy-duty construction, but we have carefully selected a dealer network that is committed to your satisfaction. We know that you will be as proud of your Regency as we are.

*Conditions apply. Visit regency-fire.com for more details.





Find More Products at **REGENCY-FIRE.COM**

Your Regency Dealer



OUTDOOR GAS FIREPLACES



regency-fire.com

WHY CHOOSE REGENCY?

At Regency, our past 40 years have been focused on providing a high-level of service while building high-quality and reliable products that our customers can enjoy for years to come.

HIGH-QUALITY

Producing a high-quality product has been at the very heart of what we do from when that very first stove rolled off the production line over 40 years ago to today. We are ever-focused on producing quality products for our customers that will last for years to come.

BEST WARRANTY

A fireplace should be reliable and should work right the first time it is used, and the 1,000th. A core part of our business is making sure that we are building long-lasting, durable, high-quality products; we back-up that commitment with the industry's best warranty on all our products.

COST-EFFICIENT

Enjoy the outdoors for longer. Controllable zone heating allows you to extend your patio season earlier in the spring and later into the fall. Enjoy your patio all night long with Regency's outdoor gas fireplaces.

Why Regency? Because it's **more** than a fireplace!



TABLE OF CONTENTS

Regency Grandview Outdoor Fireplaces

G1200P	04
G800EC	06
G600EC	08

Regency Plateau® Firetable

PTO30CFT	12
-----------------	-----------

Regency Horizon™ Outdoor Gas Fireplaces

HZ042	14
HZ060	16

Regency Plateau® Gas Burners

PTO30, PTO50	18
---------------------	-----------

Design Choices & Options

22



REGENCY GRANDVIEW™ - G1200P

Large Gas Fireplace



PREMIUM TRADITIONAL FIREPLACE

Experience the stunning flame picture of the G1200 traditional gas fireplace. Featuring our latest burner technology, this split flow infusion burner provides unmatched realism and flame control. Customize with mix-and-match accessories and 3 log set options.

The Grandview G1200 is a beautiful and powerful fireplace that will make any home feel warm and stylish. It's designed to fit perfectly in any room and offers great flexibility with many options to customize its look

STANDARD FEATURES

- NEW innovative split flow infusion burner that creates the most realistic flame package
- Largest viewing area in its class
- Standard top down and ember-bed lighting
- Integrated Invisimesh safety screen
- Cool Wall system to allow for flexible finishing options
- Flame height adjustment control
- Electronic ignition with Proflame II GTMF remote control
- Natural gas
- Limited lifetime warranty

OPTIONS

- Multiple log set choices: oak, birch or driftwood
- Interior panels in Rustic Brown, Volcanic Black, and Herringbone
- Finishing trims for easy finishing around the fireplace
- Variable speed blower (Non-combustible finishing install only) (Outdoor conversion kit required)
- Chase vent (cool wall installations)
- Propane conversion kit
- Outdoor conversion kit



G1200P - Oak log set with herringbone brick panels



G1200P - Birch logs with volcanic black brick panels



G1200P - Driftwood logs, volcanic stones and reflective black glass panels

SPECIFICATIONS	NATURAL GAS	PROPANE
Max. Input (BTU)	53,000	53,000
Turn down to (BTU)	13,500	13,500
Efficiency (steady state)	72.58%	74.08%
EnerGuide Rating (Canada only)	66.58%	67.96%

DIMENSIONS	
Width	55"
Height	42-3/4"
Depth	28-7/8"
Glass Viewing Area	1200 sq. in.

REGENCY GRANDVIEW™ - G800EC • G800C • G800EH

Medium Gas Fireplaces



YOUR FIREPLACE, YOUR WAY

Select your breathtaking flame picture and accessories to craft a truly unique fireplace. With our patented Cool Wall technology, the Regency Grandview™ G800 is the first of our Grandview™ series of gas fireplaces designed to maximize choice and customization.

STANDARD FEATURES

- Clean front design
- Largest viewing area in its class
- Top down and ember-bed lighting (G800EC/G800EH)
- Integrated safety screen
- Ceramic glass
- Standing Pilot (Direct Spark Ignition - G800C) (US Only)
- Flame height adjustment control
- Proflame II GTMF remote control (G800EC, G800EH only)
- Electronic ignition (G800EC, G800EH only)
- Rear or top vent for versatile installations (G800EC, G800C only)
- Natural gas
- Limited lifetime warranty

OPTIONS

- Choose from a log grate and traditional style log package or contemporary crystal tray
- Cool Wall system
- Brick panels in a variety of colors and designs
- Inner reflective panels in black enamel
- Inner painted black steel panels
- Surrounds in various colors
- Finishing trims for easy finishing around the fireplace
- Variable speed blower (Outdoor conversion kit required)
- Chase vent (cool wall installations)
- Propane conversion kit
- ON/OFF remote control (G800C) (US Only)
- AstroCap® venting system
- Outdoor conversion kit



G800EH - Birch log set and castlestone brick panels



G800EC/G800C - Iceberg crushed glass, volcanic stones and black steel panels



G800EC/G800C - Oak log set and herringbone brick panels



G800EC/G800C - Iceberg crushed glass, black steel panels and black faceplate



G800EC/G800C - Birch log set with brown brick panels and antique copper faceplate



G800EH - Driftwood log set and volcanic black brick panels and brushed nickel faceplate

SPECIFICATIONS	G800EC			G800C			G800EH			DIMENSIONS	
	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE	Width	35-7/8"	Height	33-7/8"	Depth
Input (BTU)	27,000	25,500	27,000	26,500	36,000	34,000					
Turn down to (BTU)	15,000	21,000	15,000	14,500	19,500	27,000					
Efficiency (steady state)	65.20%	68.16%	61.12%	63.62%	65.20%	68.16%					
EnerGuide Rating (Canada only)	55.96%	57.74%	55.96%	55.03%	58.73%	57.94%					

REGENCY GRANDVIEW™ - G600EC • G600C

Small Gas Fireplaces



SMALL FIREPLACE, BIG FLAME

This Regency Grandview™ G600 encapsulates the entire series' customization and flexibility in a more compact size.

Ideal for smaller spaces or zone heating, this unit makes a bold impact.

STANDARD FEATURES

- Clean front design
- Top down and ember-bed lighting (G600EC)
- Integrated safety screen
- Ceramic glass
- Flame height adjustment control
- Standing Pilot (Direct Spark Ignition - G600C) (US Only)
- Proflame II GTMF remote control (G600EC)
- Electronic ignition (G600EC)
- Rear or top vent for versatile installations
- Natural gas
- Limited lifetime warranty

OPTIONS

- Choose from a log grate and traditional style log package or contemporary crystal tray
- Cool Wall system to allow for any finishing material right to the edge of the fireplace
- Brick panels in a variety of colors and designs
- Inner reflective panels in black enamel
- Inner painted black steel panels
- Surrounds in various colors
- Finishing trims for easy finishing around the fireplace
- Variable speed blower (Outdoor conversion kit required)
- Chase vent (cool wall installations)
- Propane conversion kit
- ON/OFF remote control (G600C) (US Only)
- AstroCap® venting system
- Outdoor conversion kit



G600EC/G600C - Oak log set and rustic brown brick panels



G600EC/G600C - Oak log set and castlestone brick panels



G600EC/G600C - Birch log set, herringbone brick panels and black faceplate



G600EC/G600C - Ginger crushed glass and antique copper faceplate



G600EC/G600C - Iceberg crushed glass, volcanic stones and brushed nickel faceplate



G600EC/G600C - Driftwood log set and black steel panels

SPECIFICATIONS

	G600EC		G600C	
	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE
Input (BTU)	21,000	20,500	21,000	20,500
Turn down to (BTU)	11,500	16,500	11,500	11,000
Efficiency (steady state)	71.17%	72.80%	71.18%	72.71%
EnerGuide Rating (Canada only)	64.80%	67.22%	64.79%	66.76%

DIMENSIONS

Width	31-7/8"
Height	29-7/8"
Depth	14-5/8"
Viewing Area	600 sq. in.

OPTIONS & ACCESSORIES FOR GRANDVIEW

CHOOSE YOUR LOOK



INTERIOR PANEL

INTERIOR OPTION

FRONT OPTION (G600 AND G800)

MULTIPLE INTERIOR PANELS



Rustic Brown Brick Panels



Herringbone - Rustic Brown Brick Panels

MULTIPLE INTERIOR OPTIONS



Birch Log Set



Oak Log Set



Driftwood Log Set




Volcanic Black Brick Panels



Castlestone Grey (available for G600 & G800 series only)


G800 / G600



Crushed Glass - Ginger



Crushed Glass - Coal Black



Crushed Glass - Iceberg



Painted Black Steel Panels



Black Enamel Reflective Panels



Volcanic Stones

MULTIPLE FRONT OPTIONS G800 / G600



Clean Front Finishing Trim



Outside Finishing Trim



Faceplate

FACEPLATE AVAILABLE IN THREE COLORS:



Black



Brushed Nickel



Antique Copper

GRANDVIEW SERIES INSTALLATION


Location

For the purposes of this installation manual the term "outdoor" means installed outside of the insulated building envelope within a weatherproof enclosure or existing solid-fuel burning fireplace having a minimum required overhang. The outdoor space may be attached or free standing to the main/primary structure and may or may not include walls.


Note

The fireplace will not perform as an exterior wall. If installed against an exterior wall we recommend the appliance enclosure or chase be constructed completely outside of the insulated building envelope and weather membrane. The fireplace must be permanently situated and connected to a fixed piping system, it is not portable.

Flat Wall

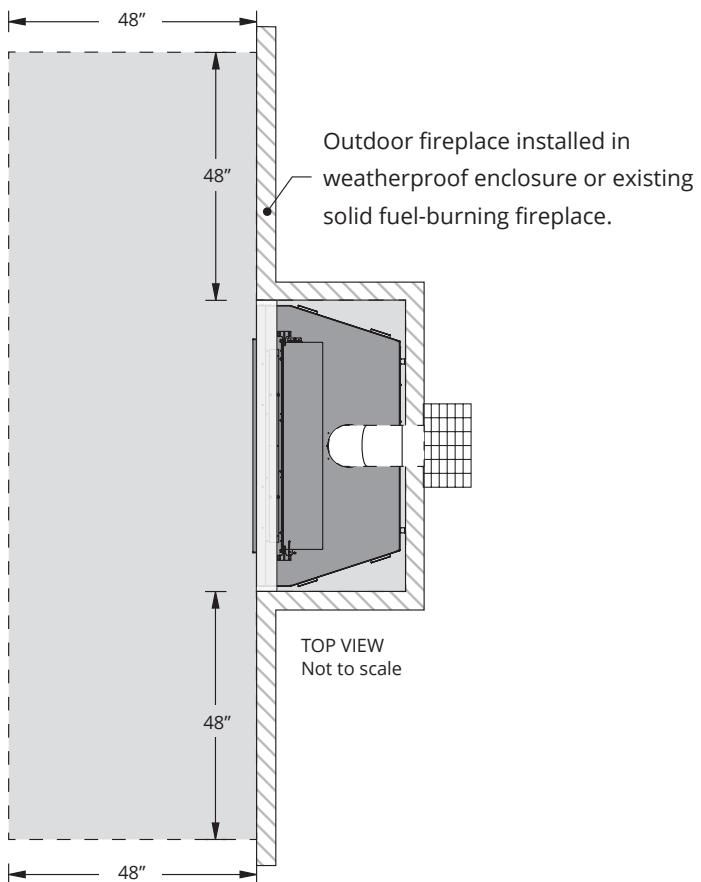

The minimum weatherproof overhang in front and at sides of the fireplace is 1/2 of the height of the overhang (as shown with 96" framing height) measured from the base of the unit.

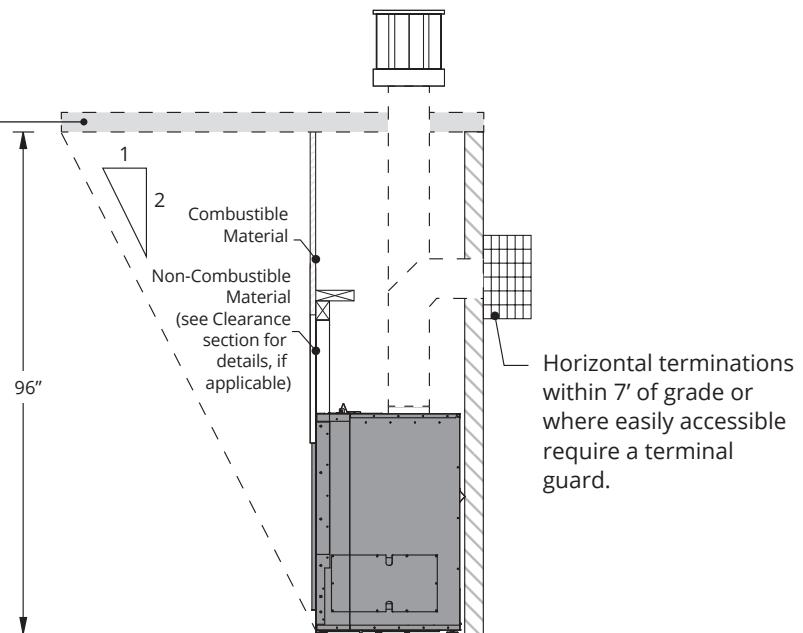

REGENCY PLATEAU® PTO30CFT

Freestanding Firetable




PTO30CFT shown with stainless steel top, crystals and glass wind shield.

LINGER OUTDOORS LONGER...IN STYLE

Regency's versatile firetable is perfect for outdoor entertaining. At 20" tall, the sleek linear style of the Regency Plateau Coffee Table creates the perfect gathering space. Included is a dining leaf that adds functionality as an outdoor table when the fireplace is not in use. The Plateau Firetable collection is crafted from the highest quality materials and durable construction, built to withstand the outdoor elements.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)*	49,000	48,000
Turn down to (BTU) *	18,000	15,000

* Figure will vary with individual conditions and fuel quality.

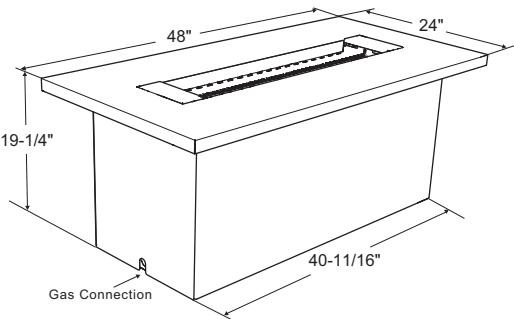



PTO30CFT shown with sunset bronze top, crystals and glass wind shield.

STANDARD FEATURES

- Propane
- Stainless steel linear burner
- Easy access on/off switch
- Match light ignition system
- Safety valve (turns gas off if flame goes out)
- Manual flame height adjustment
- Dining leaf adds functionality as an outdoor table when fireplace not in use
- Propane tank access & storage (11 lb tank)
- Approved for outdoor installation only
- No venting required

OPTIONS

- Stainless steel or sunset bronze powder coated top (must choose one)
- Crystals or firebeads in various colors (must choose one)
- Volcanic stones in various colors
- Ceramic driftwood log set
- Seasonal weather cover
- Tempered glass wind shield (4-pc) with seasonal weather cover - recommended
- 4 casters (wheels to replace leveling legs)
- Natural gas conversion kit

REGENCY HORIZON™ HZO42

Outdoor Gas Fireplace



HZO42 shown with crystals.

DESIGN YOUR OWN OUTDOOR FIREPLACE

Enjoy the drama of beautiful wide-angle flames amplified by a reflective stainless steel body. A tempered glass wind shield maintains the strong flame picture, while the seasonal weather cover (included) protects the fireplace when it's not in use. Choose from a host of fine fire bed selections to create a flame experience as unique as you.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)*	44,500	43,500

* Figure will vary with individual conditions and fuel quality.

DIMENSIONS	
Faceplate width	39-1/2"
Faceplate height	17"
Viewing area	449 sq. in.



HZO42 shown with driftwood ceramic log set & optional framing kit.

STANDARD FEATURES

- Natural gas or propane
- Stainless steel linear burner covered with copper crystals
- Stainless steel faceplate with seasonal weather cover
- Stainless steel heat deflector & inner panels
- Tempered glass wind shield
- Easy access on/off switch
- Electronic ignition system
- Safety valve (turns gas off if flame goes out)
- Runs on a battery pack
- Approved for outdoor installation only
- No venting required

OPTIONS

- Crystals or firebeads in various colors
- Volcanic stones in various colors
- Ceramic driftwood log set
- River pebbles
- Framing kit
- Hardwire kit (hardwire directly into household wiring)

REGENCY HORIZON™ HZO60

Outdoor Gas Fireplace



HZO60 shown in see-through application.

REGENCY'S LARGEST OUTDOOR GAS FIREPLACE EVER!

HZO60 is the perfect combination of style and comfort. This impressive 60" outdoor fire feature converts from single-sided to see-through design perspective. Harness the power of 64,000 BTU's to remove the chill from night air so you can enjoy your patio for longer!

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)*	64,000	62,000

* Figure will vary with individual conditions and fuel quality.

DIMENSIONS	
Width	60"
Height	17"
Depth	18"
Viewing area	up to 1,020 sq. in.



HZO60 shown in single-sided application.

STANDARD FEATURES

- Natural gas
- Stainless steel linear burner
- Single-sided or see-through design
- Stainless steel inner panels
- Tempered glass wind shield
- Easy access on/off switch
- Electronic ignition system
- Safety valve (turns gas off if flame goes out)
- Runs on a battery pack
- Approved for outdoor installation only
- No venting required

OPTIONS

- Stainless steel faceplate
- Stainless steel burner perimeter finishing trim
- Stainless steel burner cover
- Crystals or firebeads in various colors (must choose one)
- Volcanic stones in various colors
- Ceramic driftwood log set
- Hardwire kit (hardwire directly into household wiring)
- Propane conversion kit

REGENCY PLATEAU® BURNER PTO30 & PTO50

Outdoor Gas Burner




Two PTO50's (100") connected end to end, shown in custom application.

CREATE THE BACK YARD OF YOUR DREAMS

These sleek linear stainless-steel burners add warmth and ambiance to any outdoor space. Customize your design by connecting two 50" burners for a 100" feature or pairing with a 30" burner for an 80" setup. The 30" (PTO30) unit can also be doubled to 60". Perfect for homeowners and designers, this versatile burner transforms your outdoor sanctuary into a stunning retreat.


SPECIFICATIONS	30"		60"	
	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE
Input (BTU)*	50,000	49,000	100,000	98,000

SPECIFICATIONS	50"		100"	
	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE
Input (BTU)*	64,000	62,000	128,000	196,000




30"

PTO30 burner




60"

Two PTO30 burners connected end to end



50"

PTO50 burner



100"

Two PTO50 burners connected end to end

* Figure will vary with individual conditions and fuel quality.



Custom application using the Regency Plateau® PTO30 burner and see-through framing kit with Stainless Steel Panels.

STANDARD FEATURES


- Natural Gas
- Stainless steel linear burner
- Combine two burners for a more impressive fire feature
- Easy access on/off switch
- Electronic ignition
- Safety valve (turns gas off if flame goes out)
- Runs on a battery pack
- Approved for outdoor installation only
- No venting required

OPTIONS

- Stainless steel burner cover
- Crystals or firebeads in various colors (must choose)
- Volcanic stones in various colors
- Ceramic driftwood log set
- Tempered glass wind shield (4-pc) with seasonal weather cover - recommended
- Table framing kits (includes ventilation grills)
- See-through framing kit (PTO30 only)
- Optional 3pc brushed stainless steel panels (top + sides) for see-through framing kit
- Hardwire kit (hardwire directly into household wiring)
- Propane conversion kit

FINISHING OPTIONS


CRYSTALS & FIREBEADS



Crystals - Black



Crystals - Copper



Crystals - Starfire



Firebeads - Black



Firebeads - Caramel Luster



Firebeads - Glacier Ice

STONES & LOGS



Volcanic Stones - Gray



Volcanic Stones - Tan



River Pebbles
(HZ042 only)



Driftwood Ceramic Log Set

COFFEE FIRETABLE TOP OPTIONS



Stainless Steel



Sunset Bronze

ADDITIONAL OPTIONS



Exquisitely finished tempered glass for maximum safety and optimum fire viewing (Table top version shown)



Matching burner cover protects the burner, when not in use (not available for HZO42)

FRAMING KITS


1-2-3 INSTANT FIREPLACE - HZO42





No fireplace? No problem! The Regency steel framing kit allows you to install and finish your outdoor gas fireplace in no time...

DIMENSIONS: 60" W x 20" D x 52-1/2" H

PTO30 SEE-THROUGH FRAMING KIT

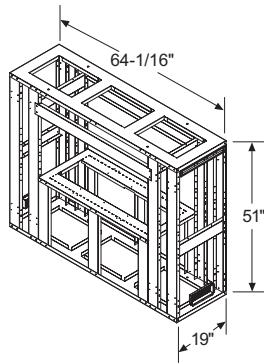

HARD WIRE KIT




Hard wire kit is perfect for residential or commercial applications (not available for PTO30CFT).

Custom application using the Regency Plateau™ PTO30 burner and see-through framing kit with Stainless Steel Panels.

NOTE: Ventilation grills are required for all enclosures. This is to alleviate moisture and allow air to circulate. Depending on model either 2 or 4 ventilation grills with a minimum 20 sq in. for each grill are required.
See manual for details.

TABLE FRAMING KIT




NOTE: Finishing materials are not included with framing kits.


FRAMING	50"	60"
A	24"	24"
B	69"	79"
C	24"	24"

DIMENSIONS


PTO30

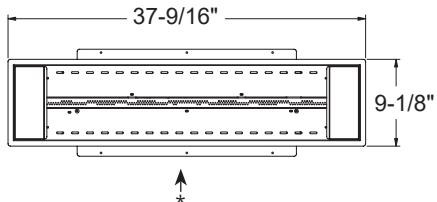


PTO50

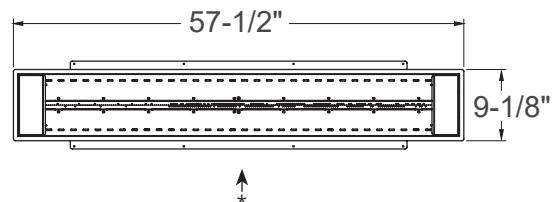


PTO60 (2 X PTO30 JOINED END TO END)

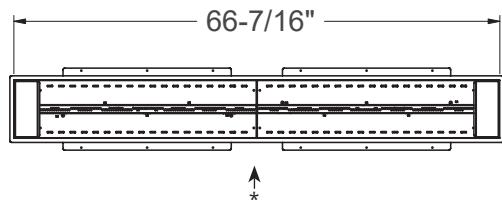

PTO80 (PTO30 & PTO50 JOINED END TO END)

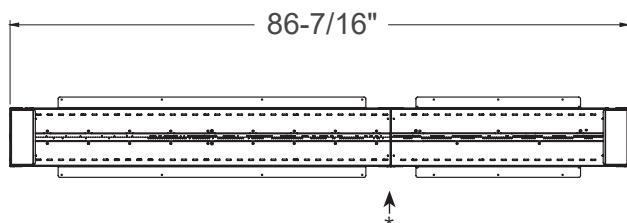


PTO100 (2 X PTO50 JOINED END TO END)

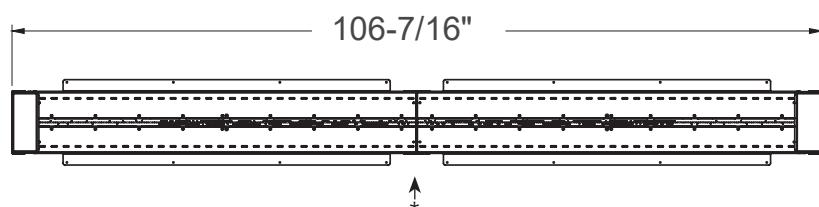

*NOTE: Gas Connection/Electrical connection locations if using optional Hardwire Kit.

DIMENSIONS


SPECIFICATIONS HZO42

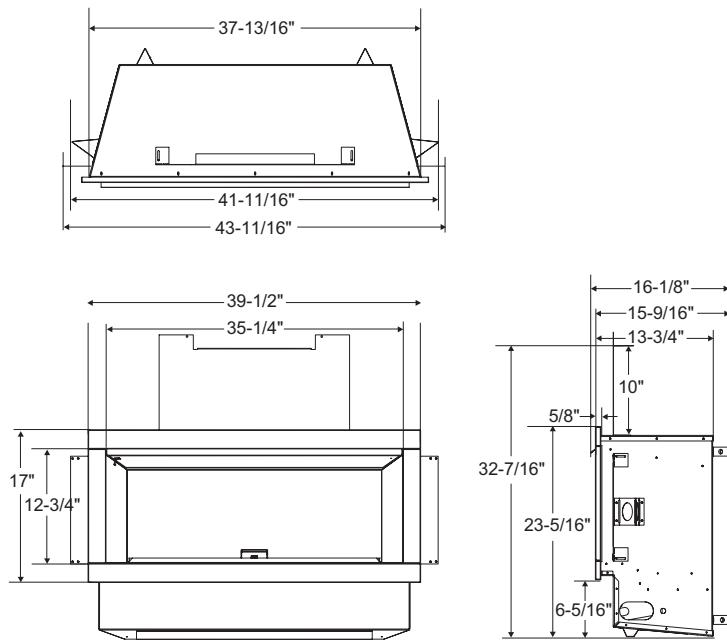

NOTE: Gas Connection/Electrical connections if using optional Hardwire Kit are located on left hand side of appliance.

SPECIFICATIONS HZO60

Single sided and see-through

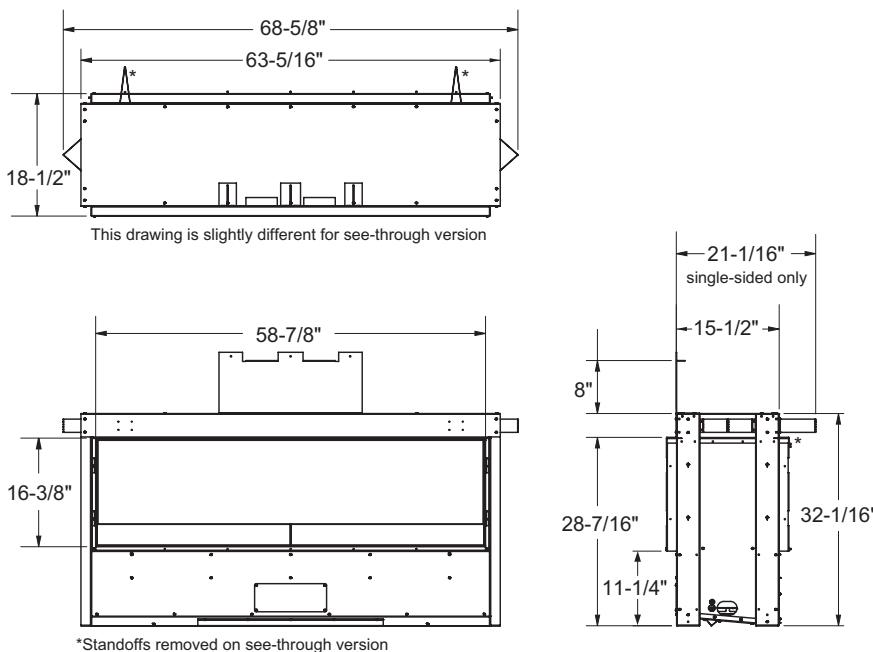


NOTE: Gas Connection/Electrical connections if using optional Hardwire Kit are located on left hand side of appliance.

DIMENSIONS

FRAMING

	HZO42	HZO60
J	42-3/16"	69"
K	32-11/16"	40-1/4"
L	20"	22-1/4"
M	52-1/2"	43-3/4"
N	40-7/16"	76-13/16"*
O	54-3/16"	108-5/8"*
P	60"	--

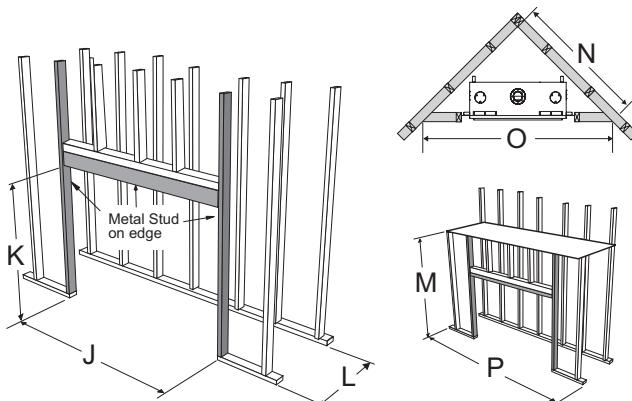


*Single sided only

Note: Please refer to the manual for specific framing instructions for the see through configuration.

CLEARANCES

	HZO42	HZO60*
A (min)	18"	22"
B	11"	11"
C	36"	36"
D (max)	12"	12"
E	57"	86"
F	36"	36"


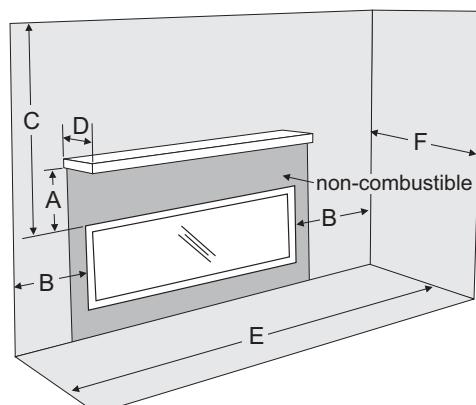


* The same clearances apply for the see through configuration.



NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up to date information. Manuals can be downloaded from our website www.regency-fire.com

INSTALLATION OPTIONS - G1200P, G800EH, G800EC, G800C

Non-Combustible Finishing Install







Combustible Finishing Install with Cool Wall



OPTIONS	G800EC	G800C	G800EH	G1200P
Cool Wall Option	Optional	Optional	Optional	Optional
Min. Cool Wall Opening	66 sq. in.	66 sq. in.	107 sq. in.	180 sq. in.
Min. Enclosure Ceiling	80" Cool Wall or 62" non-Cool Wall	80" Cool Wall or 62" non-Cool Wall	84" Cool Wall or non-Cool Wall	88" Cool Wall or 96" non-Cool Wall

DIMENSIONS - G1200P

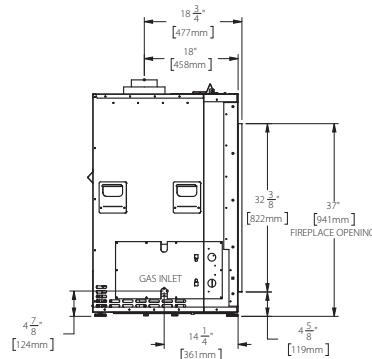
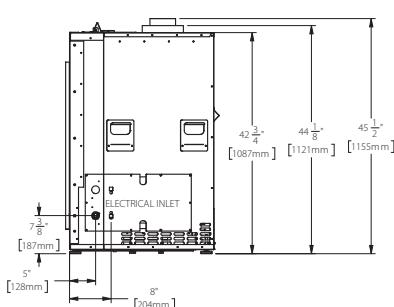
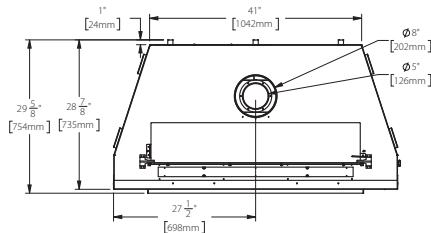
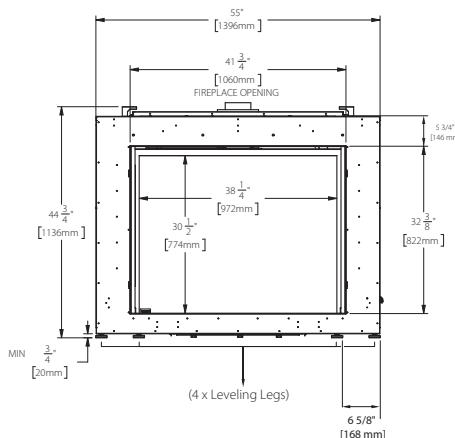


For installation, framing and clearances see manuals on our website: www.regency-fire.com





NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.

SPECIFICATIONS





DIMENSIONS - G800EC, G800C

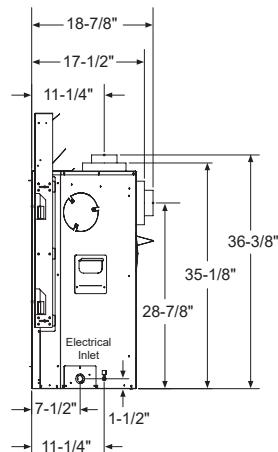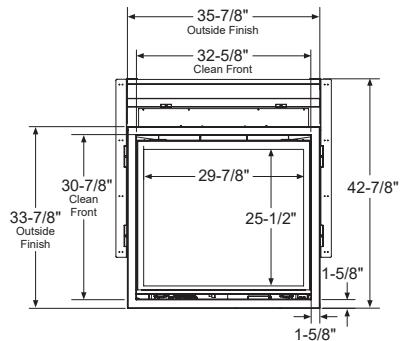

DIMENSIONS - G800EH

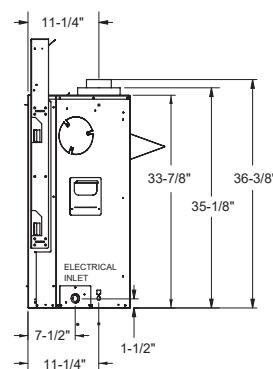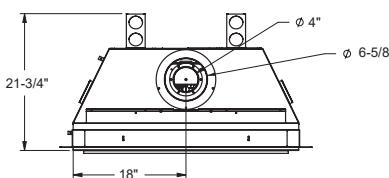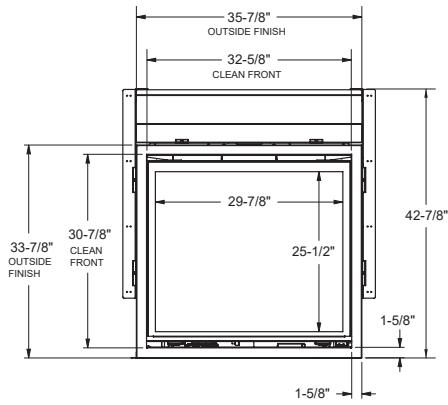

DIMENSIONS - G600EC, G600C

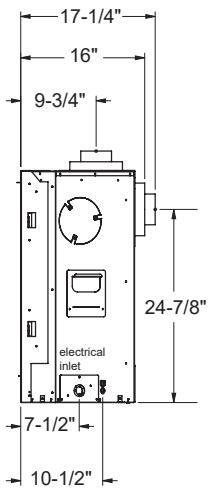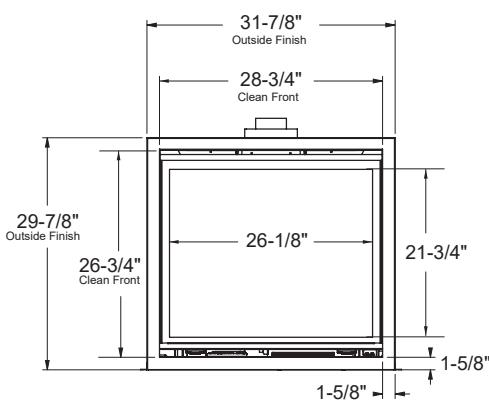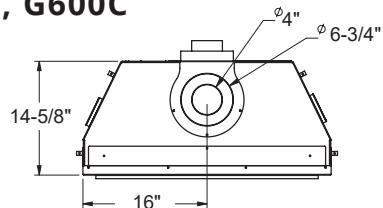

READY TO BUY



QUALITY GUARANTEED - INDUSTRY LEADING WARRANTIES

All Regency Fireplaces are manufactured in North America in our state-of-the-art manufacturing facility. When choosing to purchase a Regency fireplace, you choose high-quality craftsmanship, top-tier materials, and industry-leading support!

Add the warmth and comfort of a fireplace to your home, create memories that will last a lifetime, and rest easy knowing that your Regency is backed by the best warranty in the industry.

We have also carefully selected a dealer network that is committed to your satisfaction. We know that you will be as proud of your Regency as we are.



Find More Products at **REGENCY-FIRE.COM**

Your Regency Dealer

©2025 FPI Fireplace Products International Ltd. Regency®,
Regency Horizon™ and Regency Plateau® are the registered or
proprietary trademarks of FPI Fireplace Products International Ltd.
All rights reserved. Printed in Canada (02/25) Part no. 944-406

Version No: 2025-1



WOOD INSERTS & FIREPLACES



regency-fire.com

WHY CHOOSE REGENCY?

For the past 40+ years Regency has been focused on creating innovative, high-quality and reliable products that reduce heating costs and add true value to the home. We design all our products to be durable and last a lifetime so that our customers can enjoy them for years to come.

HIGH-QUALITY

Producing a high-quality product has been at the very heart of what we do from when that very first stove rolled off the production line over 40 years ago to today. We are ever-focused on producing quality products for our customers that will last for years to come.

BEST WARRANTY

A fireplace should be reliable and should work right the first time it is used, and the 1,000th. A core part of our business is making sure that we are building long-lasting, durable, high-quality products; we back-up that commitment with the industry's best warranty on all our products.

COST-EFFICIENT

Never before have home heating costs been higher. Turn your furnace way down and zone heat with our beautiful, reliable and convenient Regency products. Not only can you cut your fuel bills in half, but you'll be able to enjoy the timeless comfort of a Regency fire.

Why Regency? Because it's *more* than a fireplace!



TABLE OF CONTENTS

WOOD INSERTS

Hampton® Hi1150	06
Regency Alterra® Ci1150	07
Regency Classic™ i1150	08
Regency Cascades™ i1500	09
Regency Classic™ i2450	10
Regency Cascades™ i2500	11
Hampton® Hi2450	12
Hampton® Hi500	13
Regency Pro-Series™ Ci2700	14
Regency Alterra Pro™ i3000	16
Technology	18
Accessories	20

WOOD FIREPLACE

Regency Alterra® CF780	22
------------------------	----

Specifications	24
----------------	----





renewable • **affordable** • **beautiful**



REGENCY WOOD PRODUCTS



ECO-FRIENDLY

Regency wood inserts are EPA Certified so you burn less wood, produce fewer emissions, and get longer burns while keeping your home warm all year long.



HIGHLY EFFICIENT

Using more of the wood's available energy means less loading, less chopping, less effort, and most importantly less money spent on wood! Save money with highly efficient Regency wood products.



INDUSTRY'S BEST WARRANTY

Every product is backed by our lifetime limited warranty, and our hybrid products offer a 10-year, 100% warranty on the original combustor. The best in the industry!



QUALITY, DURABLE PRODUCTS

Regency wood products are manufactured right here in North America using high-quality thick gauge steel. All Regency products are designed from the ground up to be durable and to last generations.



ECO BOOST - TRIPLE BURN TECHNOLOGY

Triple stage burn technology delivers a system of high-efficiency, clean combustion and maximum heat control, all with less wood, less loading and less effort.

HAMPTON® Hi1150

Small Non-Catalytic Wood Insert



Hi1150 shown in timberline brown.

The Hampton Hi1150 small cast iron wood insert offers a traditional look and feel of cast iron with modern efficiency. This unit delivers up to 55,000 BTU of high-efficiency heat throughout your home providing comfort and warmth to the living areas you spend time in. Decrease your heating bills and increase the value of your home with this beautiful Hampton insert.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Decorative cast iron grille
- Cast iron exterior provides additional radiant heating
- Wood-finished handle
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Side-mounted air adjustment
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge steel log retainers to stop logs from rolling

OPTIONS

- Metallic black or timberline brown enamel finish
- 2-speed blower
- Power outlet conversion
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits
- Flue connectors

SPECIFICATIONS

Maximum BTU*	55,000
Typical sq. ft. heated**	600 - 1,200
EPA Efficiency	75% LHV / 71% HHV
Max log size	18"
Burn time	Up to 8 hours
Emissions	1.3 g/h
Firebox size	0.98 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING

Width (front) x Height	25" x 19-5/8"
Depth (standard flue adapter)	15"
Depth (offset flue adapter)	18-1/16"

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 18 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

REGENCY ALTERRA® Ci1150

Small Non-Catalytic Wood Insert



Ci1150 small wood insert.

This Alterra small contemporary cast iron wood insert provides a flush and clean design for your existing fireplace. This compact wood heater delivers exceptional heating capacity and the two-speed blower helps distribute the heat to the far corners of your living space.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Cast iron faceplate provides additional radiant heating
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front-mounted air adjustment
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge steel log retainers to stop logs from rolling
- Flush mount 2-speed blower

OPTIONS

- Regular or custom made backing plates
- Standard or 4-1/2" offset flue adaptor
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Flue connectors
- Wrap insulation kits

SPECIFICATIONS

Maximum BTU*	55,000
Typical sq. ft. heated**	600 - 1,200
EPA Efficiency	75% LHV / 71% HHV
Max log size	18"
Burn time	Up to 8 hours
Emissions	1.3 g/h
Firebox size	0.98 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING

Width (front) x Height	25" x 23"
Depth (standard flue adapter)	15-1/8"
Depth (offset flue adapter)	18-1/8"

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 18 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

REGENCY CLASSIC™ i1150

Small Non-Catalytic Wood Insert



i1150 shown with nickel accent door & oversize backing plate.

This Regency Classic i1150 small wood insert is perfect to seal off that drafty fireplace that isn't quite big enough for a full sized heater or for that area in your home that requires a smaller heater. It also adapts to fit most prefabricated fireplaces.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Wood-finished handle
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front-mounted air adjustment
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain to keeps glass clean
- Heavy-gauge steel log retainers to stop logs from rolling
- Welded ash lip will never bend or break

OPTIONS

- Cast iron door with heat radiating ceramic glass in black or nickel accent
- Contemporary door (black only)
- Regular or oversize backing plate (black trim included)
- Variable-speed blower
- Standard or 4-1/2" offset flue adaptor
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits
- Flue connectors

SPECIFICATIONS

Maximum BTU*	55,000
Typical sq. ft. heated**	600 - 1,200
EPA Efficiency	77% LHV / 71% HHV
Max log size	18"
Burn time	Up to 8 hours
Emissions	1.3 g/h
Firebox size	0.98 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING

Width (front) x Height	23" x 19"
Depth (standard flue adapter)	13-3/4"
Depth (offset flue adapter)	16-1/2"

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 20 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

REGENCY CASCADES™ i1500

Small Hybrid Wood Insert



i1500 shown with black door and regular backing plate.

The Regency Cascades i1500 small hybrid wood insert features Regency's Eco-Boost triple burn technology to allow for longer burns, fewer emissions, and greater efficiency. Perfect for sealing a drafty fireplace or adding high-efficiency warmth to a smaller space.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Wood-finished handle
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front-mounted air adjustment & catalytic bypass
- Air & bypass safe operation tool
- Digital catalytic temperature monitor helps your stove reach maximum burn times & efficiency
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge steel log retainers to stop logs from rolling
- Welded ash lip will never bend or break
- 10-year 100% coverage on the original catalyst

OPTIONS

- Cast iron door with heat radiating ceramic glass in black or nickel accent
- Regular or oversize backing plate (black trim included)
- Variable-speed blower
- Standard or 4-1/2" offset flue adaptor
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits

SPECIFICATIONS

Maximum BTU*	55,000
Typical sq. ft. heated**	600 - 1,200
EPA Efficiency	84% LHV / 78% HHV
Max log size	18"
Burn time	Up to 10 hours
Emissions	1.0 g/h
Firebox size	0.98 cu. ft.
Flue size	6"



MIN. FIREPLACE OPENING

Width (front) x Height	23" x 19"
Depth (standard flue adapter)	13-3/4"
Depth (offset flue adapter)	16-1/2"

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 18 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

REGENCY CLASSIC™ i2450

Medium Non-Catalytic Wood Insert



i2450 shown with nickel accent door & regular backing plate.

The Regency Classic i2450 medium wood insert is ready to install and fits easily into your existing fireplace. Quickly and easily load wood front to back or side-to-side and experience long efficient burns. With the i2450 classic wood insert, style meets modern wood burning technology.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Wood-finished handle
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Side-mounted air adjustment
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Black convection grilles
- Welded ash lip will never bend or break

OPTIONS

- Cast iron door with heat radiating ceramic glass in black or nickel accent
- Nickel convection grilles
- Regular or oversize backing plate (black trim included)
- 2-speed blower
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits
- Flue connectors

SPECIFICATIONS

Maximum BTU*	75,000
Typical sq. ft. heated**	1,000 - 2,200
EPA Efficiency	72% LHV / 67% HHV
Max log size	18"
Burn time	Up to 10 hours
Emissions	1.4 g/h
Firebox size	2.3 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING

Width (front) x Height	25" x 21-1/2"
Depth (standard flue adapter)	17"
Depth (offset flue adapter)	--

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 18 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

REGENCY CASCADES™ i2500

Medium Hybrid Wood Insert



i2500 shown with black door & regular backing plate.

The Regency Cascades i2500 medium hybrid wood insert features Regency's Eco-Boost triple burn technology designed to improve efficiency and burn times while reducing emissions. By using the latest in wood burning technology the Cascades i2500 provides long, clean burns so you burn less wood throughout the year.

FEATURES

- Wood-finished handle
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Side-mounted air adjustment & front-mounted catalytic bypass
- Bypass safe operation tool
- Digital catalytic temperature monitor helps your stove reach maximum burn times & efficiency
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Black convection grilles
- Welded ash lip will never bend or break
- 10-year 100% coverage on the original catalyst

OPTIONS

- Cast iron door with heat radiating ceramic glass in black or nickel accent
- Nickel convection grilles
- Regular or oversize backing plate (black trim included)
- 2-speed blower
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits



SPECIFICATIONS

Maximum BTU*	78,000
Typical sq. ft. heated**	1,000 - 2,200
EPA Efficiency	85% LHV / 78% HHV
Max log size	18"
Burn time	Up to 12 hours
Emissions	1.4 g/h
Firebox size	2.3 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING

Width (front) x Height	25" x 21-1/2"
Depth (standard flue adapter)	17"
Depth (offset flue adapter)	--

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 18 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

HAMPTON® Hi2450

Medium Non-Catalytic Wood Insert



Hi2450 shown with regular faceplate in metallic black.

This Hampton medium cast iron wood insert adds the timeless beauty of cast iron while eliminating drafts from an open fireplace and adding a high-efficiency heater to your home. Choose from two colors, in different finishing to compliment your existing décor.

FEATURES

- Cast iron exterior provides additional radiant heating
- Wood-finished handle
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Side-mounted air adjustment
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean

OPTIONS

- Metallic black or timberline brown enamel finish
- 2-speed blower
- Regular or oversize faceplate
- Decorative cast iron grille
- Power outlet conversion
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits
- Flue connectors

SPECIFICATIONS

Maximum BTU*	75,000
Typical sq. ft. heated**	1,000 - 2,200
EPA Efficiency	72% LHV / 67% HHV
Max log size	18"
Burn time	Up to 10 hours
Emissions	1.4 g/h
Firebox size	2.3 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING

Width (front) x Height	25" x 21-1/2"
Depth (standard flue adapter)	17"
Depth (offset flue adapter)	--

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 18 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

HAMPTON® Hi500

Large Hybrid Wood Insert



Hi500 shown in Timberline Brown enamel (digital catalytic monitor not shown).

The Hampton Hi500 is a large cast iron hybrid wood insert featuring Regency's Eco-Boost triple burn technology. Experience long term burns, fewer emissions, and greater efficiency. This unit combines modern technology and traditional design so you can enjoy the best of both worlds without sacrificing style or efficiency!

FEATURES

- Cast iron exterior provides additional radiant heating
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front-mounted air adjustment & catalytic bypass
- Digital catalytic temperature monitor helps your stove reach maximum burn times & efficiency
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge steel log retainers to stop logs from rolling
- 110° opening door for easy loading
- 10-year 100% coverage on the original catalyst

OPTIONS

- Metallic black or timberline brown enamel finish
- Flush mount 2-speed blower
- Regular or oversize faceplate
- Decorative cast iron grille
- Backing plates in two sizes, or custom made to order
- Offset flue adaptor for installation flexibility
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits



SPECIFICATIONS

Maximum BTU*	78,000
Typical sq. ft. heated**	up to 2,600
EPA Efficiency	83% LHV / 77% HHV
Max log size	22"
Burn time	Up to 14 hours
Emissions	1.1 g/h
Firebox size	2.6 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING

Width (front) x Height	29" x 21-3/4"
Depth (standard flue adapter)	19"
Depth (offset flue adapter)	--

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 18 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

REGENCY PRO-SERIES™ Ci2700

Large Hybrid Wood Insert



Ci2700 shown with low profile faceplate (digital catalytic monitor not shown).

The Regency Pro-Series Ci2700 contemporary cast iron hybrid wood insert features Regency's Eco-Boost triple burn technology to yield long burn times and minimal emissions. This insert's flush design takes the wood insert category to a whole new level. Clean lines surround an expansive linear firebox to provide you with a designer look around an impressive fire.

FEATURES

- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front-mounted air adjustment & catalytic bypass
- Digital catalytic temperature monitor helps your stove reach maximum burn times & efficiency
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge steel log retainers to stop logs from rolling
- 110° opening door for easy loading
- 10-year 100% coverage on the original catalyst

OPTIONS

- Low profile or contemporary faceplate
- Concealed 2-speed blower
- Backing plate in 2 sizes, or custom made to order
- Offset flue adapter for installation flexibility
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits





Ci2700 shown with contemporary faceplate & oversized backing plate.

SPECIFICATIONS

Maximum BTU*	78,000
Typical sq. ft. heated**	up to 2,600
EPA Efficiency	83% LHV / 77% HHV
Max log size	22"
Burn time	Up to 14 hours
Emissions	1.1 g/h
Firebox size	2.6 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING

Width (front) x Height	29" x 21-3/4"
Depth (standard flue adapter)	19"
Depth (offset flue adapter)	--



Regular Backing Plate



Oversized Backing Plate



Custom Backing Plate

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 18 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

ALTERRA PRO i3000

Large Hybrid Wood Insert



FEATURES

- Removable flue collar, wheels and leveling bolts assist with quicker installation
- Adjustable door latch ensures a tight door seal over time
- Front mounted air adjustment & catalytic bypass
- Digital catalytic temperature monitor helps your stove reach maximum burn times & efficiency
- High performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge log retainer, which will develop a beautiful patina with use, keeps logs in their place
- Triple-burn technology creates longer and more complete burns
- Backed by the industry's most comprehensive Limited Lifetime Warranty
- 10-year, 100% coverage on original metal catalyst
- Qualifies for U.S. Biomass Tax Credit

SPECIFICATIONS

Maximum BTU*	85,000
Typical sq. ft. heated**	up to 2,600
EPA Efficiency	84% LHV / 78% HHV
Max Log Size	20"

OPTIONS

- Concealed temperature sensitive variable speed blower
- Regular, oversize or custom faceplate options
- Premium or Traditional surrounds
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits

GLASS VIEWING AREA

Width	30"
Height	17"



MINIMUM FIREPLACE OPENING

	With Faceplate	With Faceplate + Premium Surround	With Faceplate + Traditional Surround
Width (Front)	32"	32"	30.5"
Height	24"	24"	24"
Depth	21"	19.5"	19"

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

Our Newest Wood Insert:

Welcome to the world of warmth, elegance, and unparalleled craftsmanship. Designed to transform your fireplace into a captivating focal point, the i3000 blends timeless beauty with modern functionality, offering the perfect balance of form and function.



Unmatched Versatility: Whether you prefer a classic aesthetic or a sleek, contemporary look, our wood insert is designed to complement any style of décor. With a variety of finishes and designs to choose from, you can easily customize your insert to suit your personal taste.

CHOOSE YOUR LOOK



SURROUND
(PREMIUM OR TRADITIONAL)

FACEPLATE
(CONTEMPORARY,
CLASSIC OR ARCHED)

DOOR STYLE
(CONTEMPORARY OR CLASSIC)

The surround slips over the faceplate.

PREMIUM FEATURES



Edge to Edge
Frameless Glass
Door



Smooth
Contemporary
Refractory Panels
(included)



Door is Flush
With Faceplate

FRONT OPTIONS



Contemporary
Faceplate



Oversize Contemporary
Faceplate



Classic Faceplate



Oversize Classic
Faceplate



Arched Faceplate

PREMIUM SURROUNDS*



Black



White



Sunset Bronze



Grey



Brushed Nickel

TRADITIONAL SURROUNDS*



Black



Brushed Antique Copper

CUSTOM FACEPLATE



Custom 3-sided Faceplate


*NOTE: Surrounds will reduce your minimum fireplace opening size. Refer to manual for more information.

Premium or Traditional Surrounds can only be used with Contemporary or Classic Faceplates.

WOOD TECHNOLOGY

CASCADES SERIES COMBUSTOR

Triple stage burn technology delivers a system of high-efficiency, clean combustion & maximum heat control, all with less wood, less loading & less effort.

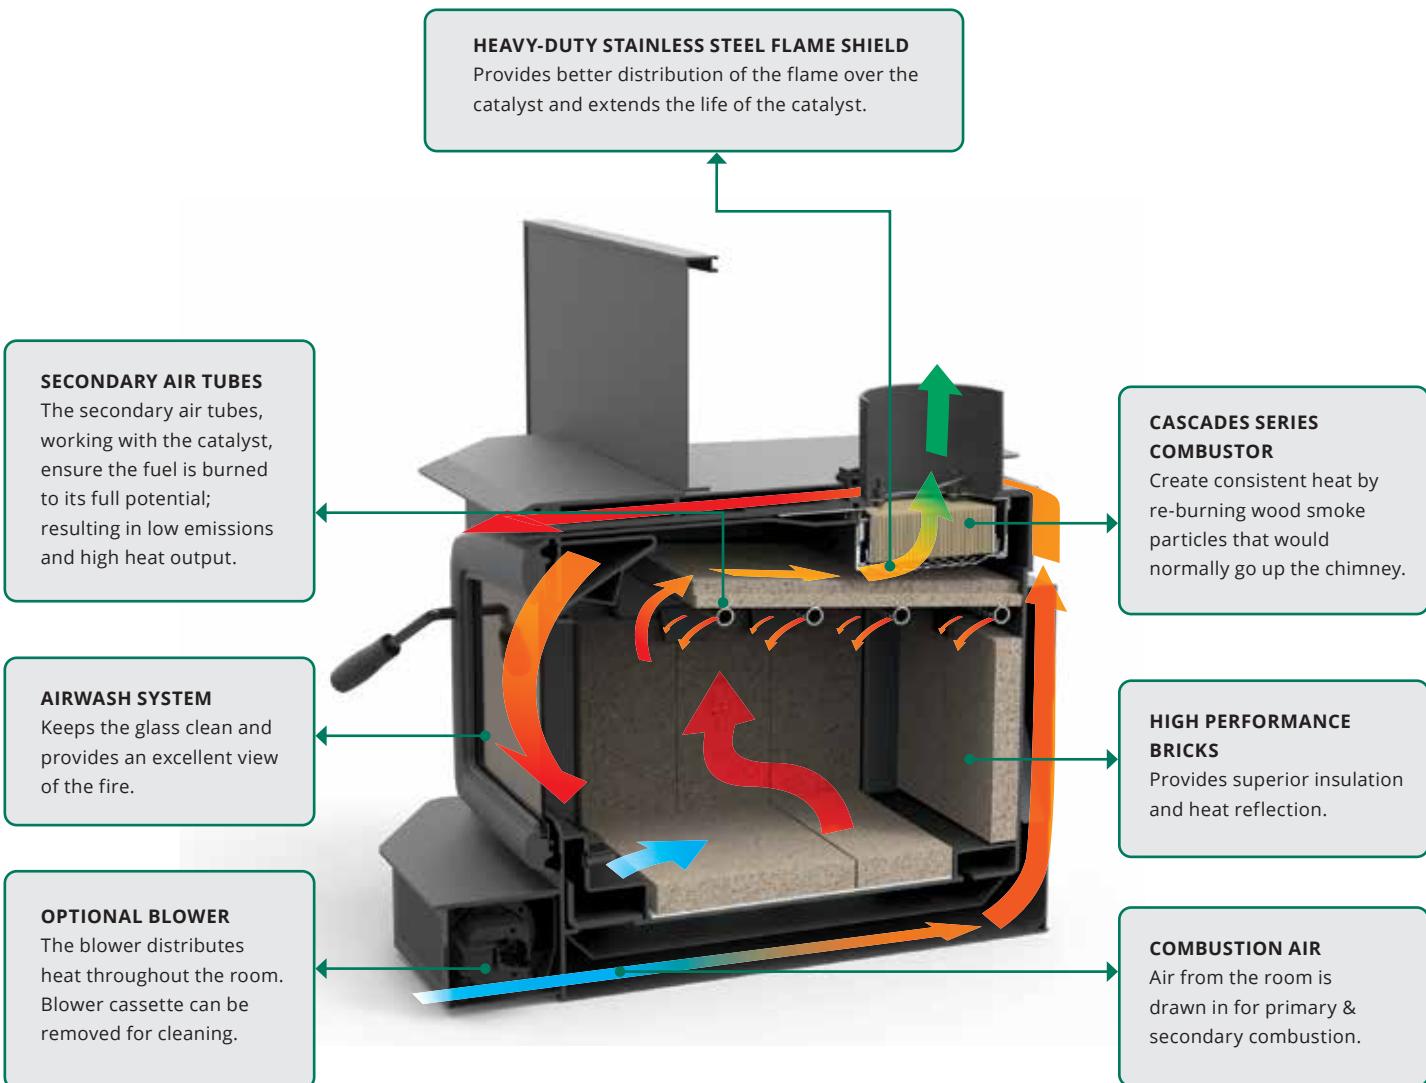

LEARN MORE ABOUT OUR
WOOD TECHNOLOGIES AT


regency-fire.com/videos



WOOD TECHNOLOGY

PRO SERIES COMBUSTOR

With Eco-Boost technology you get more out of your wood. Offering some of the highest efficiencies available anywhere, the Eco-Boost system uses more of the available energy in the wood, resulting in less loading, less chopping, and less hauling. The triple-stage burn significantly reduces emissions below EPA 2020 standards.

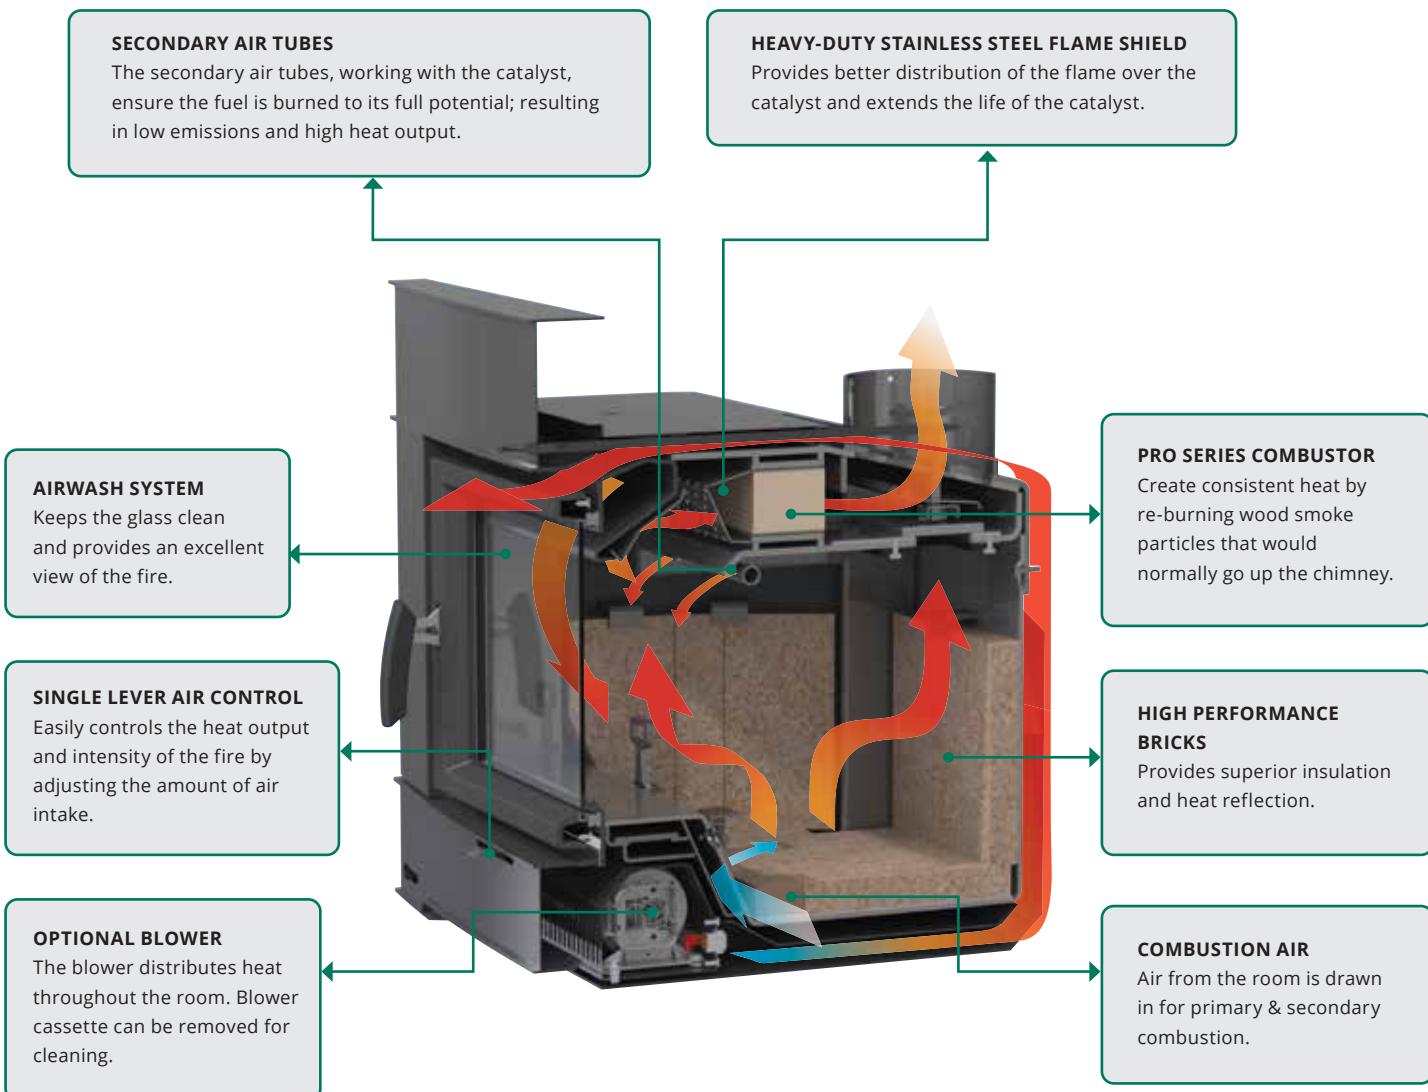

LEARN MORE ABOUT OUR
WOOD TECHNOLOGIES AT
regency-fire.com/videos



NOT SHOWN IN THE DIAGRAM

HEAVY-DUTY CAM LATCH
Ensures airtight seal for controlled airflow.

ACCESSORIES

CAST IRON DOORS (Classic & Cascade Series only)



Black cast iron door
(includes black hinge caps)



Nickel accent cast iron door
(includes nickel hinge caps)



Contemporary door

POWERFUL BLOWER



This powerful blower can dramatically increase the circulation of heat in your home. It includes an automatic heat sensor which turns the blower on & off at predetermined temperatures.

SPECIFICATION RECAP

SPECIFICATIONS	Hi1150 / Ci1150 / i1150	i1500	i2450	i2500	Hi2450	Hi500 / Ci2700	i3000
Maximum BTU*	55,000	55,000	75,000	83,000	75,000	78,000	85,000
Typical sq. ft. heated**	600 - 1,200	600 - 1,200	1,000 - 2,200	1,000 - 2,200	1,000 - 2,200	up to 2,600	up to 2,600
EPA Efficiency	77% LHV 71% HHV	84% LHV 78% HHV	72% LHV 67% HHV	85% LHV 78% HHV	72% LHV 67% HHV	83% LHV 77% HHV	84% LHV 78% HHV
Max log size	18"	18"	18"	18"	18"	22"	20"
Burn time*	Up to 8 hours	Up to 10 hours	Up to 10 hours	Up to 12 hours	Up to 10 hours	Up to 14 hours	Up to 14 hours
Emissions	1.3 g/h	1.0 g/h	1.4 g/h	1.4 g/h	1.4 g/h	1.1 g/h	.95 g/h
Firebox size	0.98 cu. ft.	0.98 cu. ft.	2.3 cu. ft.	2.3 cu. ft.	2.3 cu. ft.	2.6 cu. ft.	3.0 cu. ft.
Flue size	6"	6"	6"	6"	6"	6"	6"
Biomass Tax Credit Eligible		✓		✓		✓	✓

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

BTU CALCULATION METHOD: Max BTUs are calculated by taking an average fillable volume of 95% of the stove's capacity, multiplied by 19.5 pounds per square foot and an average of 9100 BTUs per pound of wood. Factoring in the listed efficiency, 15% moisture content and dividing by the proven burn time at the high heat setting.

REGENCY WOOD FIREPLACE



RELAX WITH A REGENCY DECORATIVE FIREPLACE

There's nothing quite like sitting by a cozy fire; the dancing flame, crackle of the wood, radiant warmth, and distinctive smell tugs at our heartstrings. This love for fire is deeply ingrained and borne out of evolution; it is no doubt why fireplaces are still sought after. Sitting in front of a fire, we feel calmer, safer, and more sociable. Studies have proven that wood fires lower blood pressure and generate a sense of community with those around us.

Regency decorative wood fireplaces are perfect for those looking to add a stunning fireplace, experience the comfort and ambiance of a real wood fire, but do not require significant heat output for their entire home.

REGENCY ALTERRA® CF780

Large Wood Fireplace



CF780 wood fireplace shown with traditional brick panels.

Add natural elegance to any room with Regency's largest portrait style wood fireplace. Designed to showcase the dynamic ambience of a wood burning fire, the Regency Alterra CF780 is a magnificent and captivating focal point.

FEATURES

- Easy-to-use: no air adjustment needed - load it and leave it!
- Over 700 sq. in. of fire viewing area
- Clean edge finish puts the focus directly on the fire
- Guillotine style door slides into the chase
- Integrated safety screen can be pulled down when required, or discreetly hidden out of sight
- Stylish removable wooden door tool with strap
- Heavy gauge steel log retainers to stop logs from rolling
- Designed to fit perfectly on any wall, including corners
- Door designed for easy cleaning and complete serviceability
- Top vent with standard 8-inch pipe

OPTIONS

- Customize the look by choosing from contemporary or traditional brick panels
- Outside air and flue damper can be closed when not in use, preventing cold air from coming into your home
- Approved to use with gas logs
- Various venting kits



CF780 wood fireplace shown with contemporary brick panels.

SPECIFICATIONS	
Width (front)	49-5/8"
Width (back)	25-7/8"
Height	71-5/16"
Depth	33-7/8"

SPECIFICATIONS	
Glass viewing height	23-3/4"
Glass viewing width	31-1/4"
Maximum log size	18"
Firebox box	7.91 cu. ft.
Flue size	8"

INNER BRICK PANEL OPTIONS



Contemporary



Traditional




CF780 wood fireplace shown with front glass half way and mesh safety screen down


NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.

SPECIFICATIONS


TOP VIEW

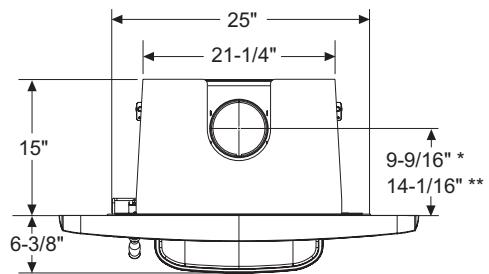

Hi1150

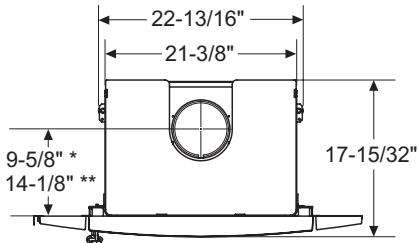


Ci1150

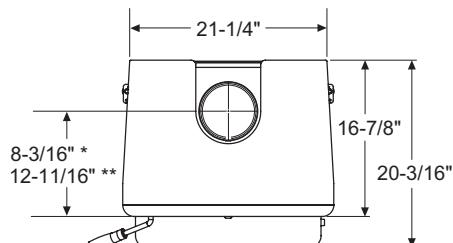


i1150 / i1500


* with standard flue adapter ** with offset flue adapter

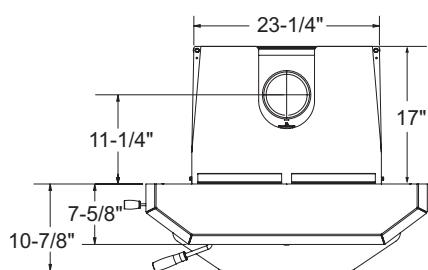


i2450 / i2500

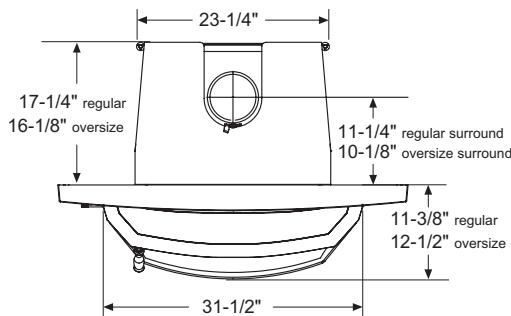

Hi2450

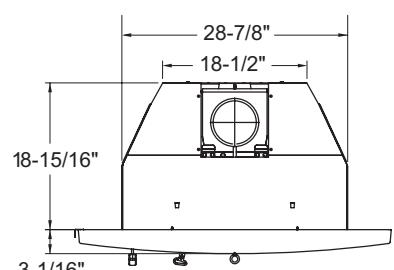

Ci2700* / Hi500

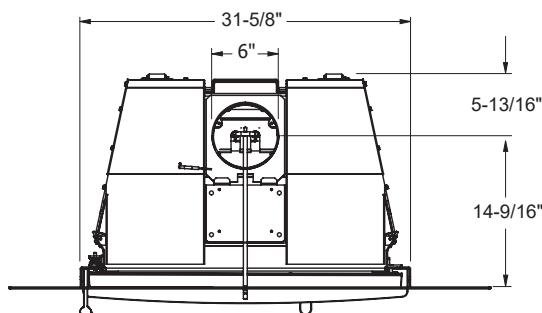

i3000

DIMENSIONS	Hi1150	Ci1150	i1150 / i1500	i2450 / i2500 / Hi2450	Ci2700* / Hi500	i3000
Firebox Height	18-13/16"	22-1/8"	18-3/4"	20-3/4"	21-1/2"	24"
Height to Top of Flue Collar	19-1/2"	22-13/16"	19-1/2"	21-3/8"	23-1/2"	23-1/2"
Faceplate (W x H)	39-13/16" x 27-1/4"	35-15/16" x 25-3/4"	38" x 26-3/8"	40" x 30"	40" x 26"	40" x 26"
Oversize Faceplate (W x H)	--	--	44" x 30-3/8"	48" x 33"	--	--
Backing Plate (W x H)	--	40" x 29-1/2"	--	--	44" x 29-7/8"	44" x 29-7/8"
Oversize Backing Plate (W x H)	--	--	--	--	48" x 33-7/8"	48" x 33-7/8"


*These dimensions only apply to Low Profile & Contemporary Faceplate.

DISCLAIMER: Please always refer to the manual for the latest up to date installation details.

SPECIFICATIONS

MIN. FIREPLACE OPENING	Hi1150	Ci1150	i1150 / i1500	i2450 / i2500 / Hi2450	Ci2700 / Hi500	i3000
Height	19-5/8"	23"	19"	21-1/2"	21-3/4"	24"
Width (front)	25"	25"	23"	25"	29"	32"
Depth (with standard flue adapter)	15"	15-1/8"	13-3/4"	17"	19"	21"
Depth (with offset flue adapter)	18-1/16"	18-1/8"	16-1/2"	--	--	--

*Surrounds will reduce your minimum fireplace opening size. Refer to manual for more information

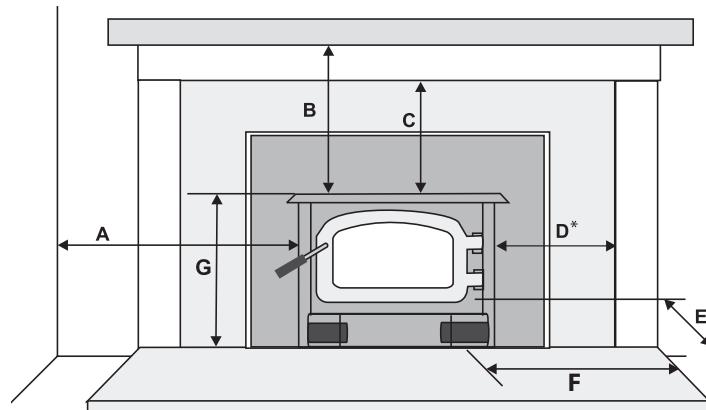

MASONRY FIREPLACE CLEARANCES

The minimum required clearances to combustible materials when installed into a masonry fireplace are listed below for 3.5"** mantle:

UNITS	ADJACENT SIDE WALL (TO SIDE)*	MANTLE*	TOP FACING*	SIDE FACING*	MIN. HEARTH EXTENSION		MINIMUM HEARTH SIDE EXTENSION	TO TOP OF UNIT
	A	B	C	D	E (USA)	E (CAN)	F	G
Hi1150	15"	20"	14"	7-7/8"	16	18"	8"	19"
Ci1150	15"	20"	14"	7-3/8"	16"	18"	8"	20-1/2"
i1150 / i1500	15"	15"	14"	1/2"	16"	18"	8"	18-3/4"
i2450 / i2500	12"	i2450 = 17" i2500 = 17-1/4"	i2450 = 14" i2500 = 16"	1/2"	16"	18"	8"	i2450 = 20" i2500 = 20-3/4"
Hi2450	12"	17"	14"	1/2"	16"	18"	8"	21-5/8"
Ci2700 / Hi500	12-3/16"	21-5/8"	14"	7-3/8"	16"	18"	8"	19-1/4"
i3000	15-1/2"	15"	13-3/4"	11-3/4"	16"	18"	8"	23-1/2"




* Measured from side/top of appliance/door/surround depending on model.

** NOTE: Refer to manual for any mantle greater than 3.5" up to a maximum of 12"


DISCLAIMER: Please always refer to the manual for the latest up to date installation details.

SPECIFICATIONS



CF780 - DIMENSIONS

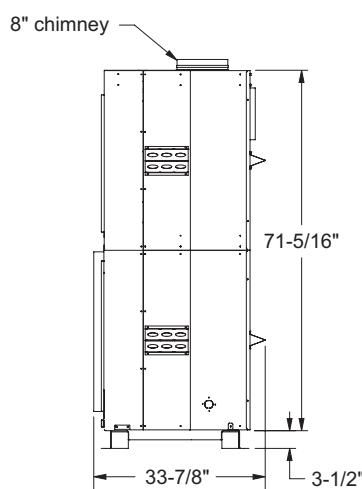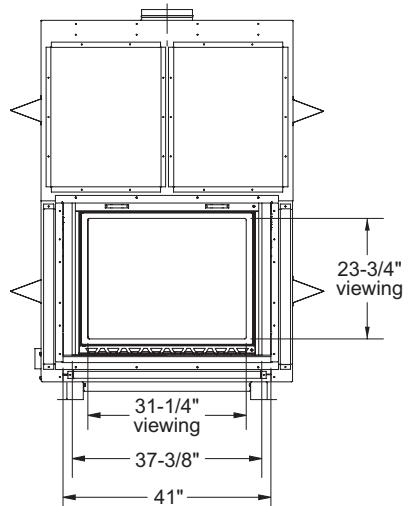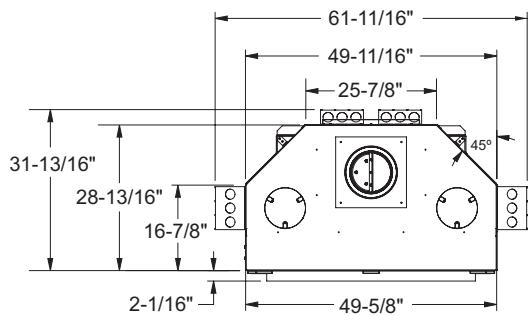

CF780 - FRAMING

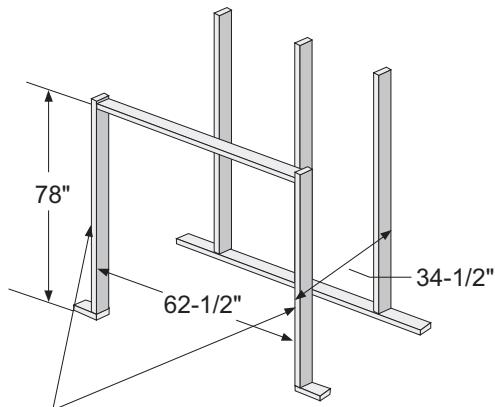


Front Face - build with steel studs and non-combustible board. Plan out and frame ventilation grills. Finish with materials such as stone or tile.

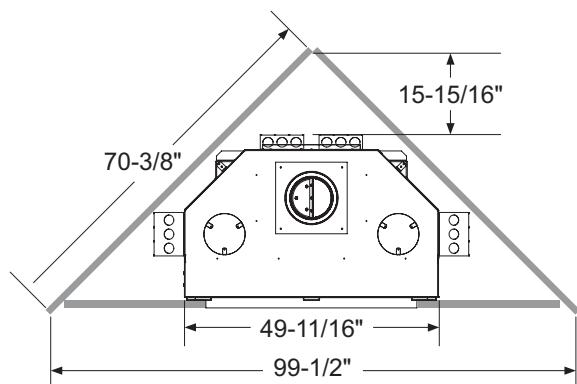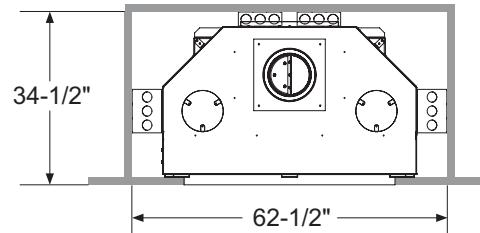

SPECIFICATIONS

CF780 - CLEARANCES

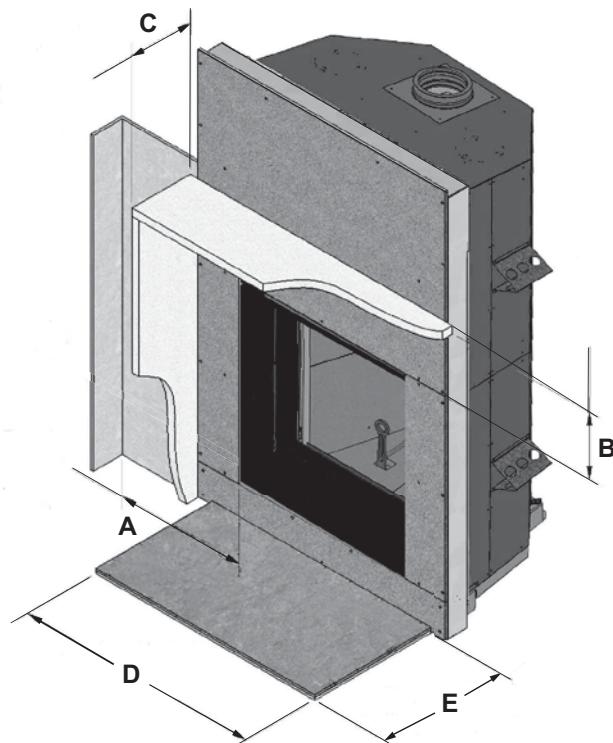

MINIMUM CLEARANCE TO COMBUSTIBLES

CF780		USA	CANADA
A	Side Wall From Side Opening	24"	24"
B	Mantel Height (min.) From Opening	7"	7"
C	Mantel Depth (max.)	12"	12"

NON-COMBUSTIBLE HEARTH REQUIREMENT

CF780		USA	CANADA
D	Hearth Width	61-3/8"	61-3/8"
E	Hearth Depth	20"	20"

NOTE: Refer to manual for more detailed requirements.



REGENCY



Ci1150 Alterra small wood insert



Alterra Pro i3000A medium wood insert shown with classic faceplate



Ci2700 shown with low profile faceplate (digital catalytic monitor not shown).

SPECIFICATIONS

EPA 2020 CERTIFIED

Regency wood inserts are tested and certified to the strictest clean air standards as set by the United States Environmental Protection Agency (EPA). Regency's wood inserts are fully EPA 2020 certified, meaning they release very little particulate matter into the atmosphere, less than 2.5 grams per hour, compared to the 50–60 grams per hour produced by traditional open hearth fireplaces.

Regency engineers have meticulously designed the firebox to generate efficient airflow around the wood, allowing it to burn more completely, resulting in minimal and very fine ash. When comparing models, check the white EPA labels – a lower g/h rating means a cleaner, more efficient wood stove.



As trees grow, they absorb carbon dioxide from the atmosphere. When trees die and are left to decompose or burn in forest fires, the carbon stored within the trees is released back into the atmosphere, once again as carbon dioxide. Burning firewood produces the same amount of carbon dioxide as it has absorbed – this makes it carbon neutral. Wood is also a renewable, natural energy source.

Well-managed forests are a renewable and sustainable energy source that also helps reduce our reliance on oil and gas greenhouse gas emissions.



SPECIFICATIONS

FIREPLACE SELECTION WORKSHEET

We want you to enjoy your beautiful Regency fireplace for years to come. To help you figure out which product is just right for your home, fill in the following worksheet. Once complete, visit your nearest Regency dealer. Your professional Regency dealer will assess your needs - including local building codes - and install your Regency!

1. BASIC PRODUCT FUNCTION QUESTIONS

a. I would like my unit to provide me with: Supplemental heating Priority heating

b. The room/rooms I would like to heat are: _____ sq. ft.



2. FIREPLACE PRODUCT TYPE AND MEASUREMENTS

a. I am: Installing a new fireplace Installing into an existing fireplace

b. Fill in the following measurements: Ceiling Height: _____
Location in the room: _____

c. What is the: Flooring material: _____
Wall material: _____
Ceiling material: _____

d. Fireplace opening dimensions: Width (front): _____
Width (back): _____
Height: _____
Depth: _____

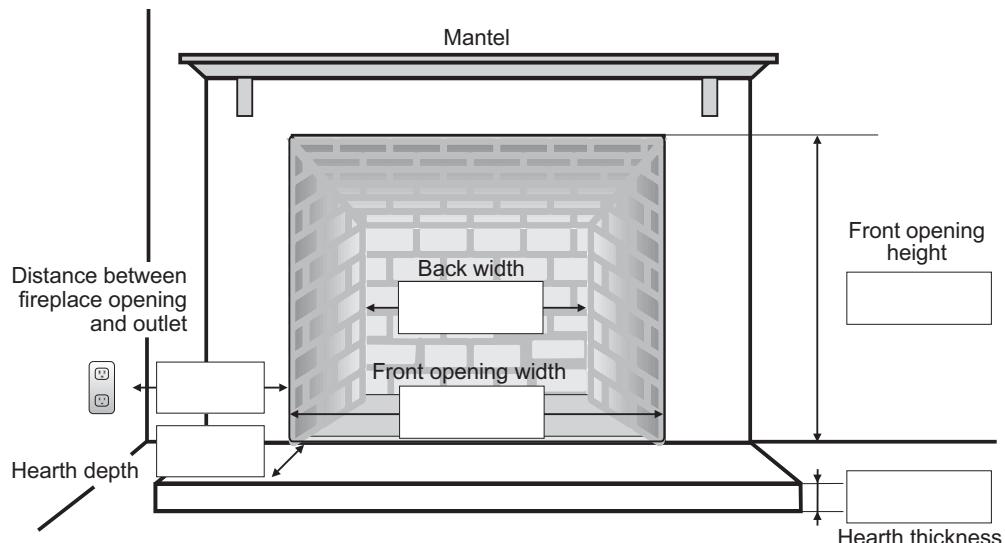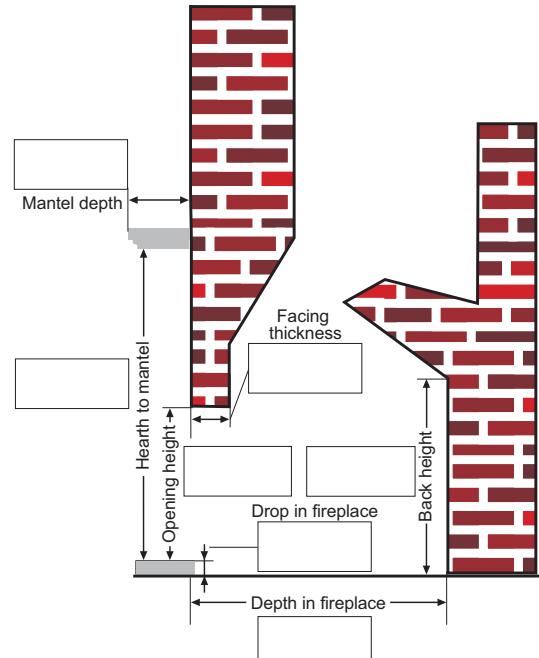



Find More Products at **REGENCY-FIRE.COM**

Your Regency Dealer

©2025 FPI Fireplace Products International Ltd. Regency®, Regency Classic™, Regency Cascades™, Regency Pro-Series™, Hampton™, Alterra Pro™ and Alterra® are registered or proprietary trademarks of FPI Fireplace Products International Ltd. All rights reserved.

Printed in Canada (06/25) Part no. 944-439

Version No: 2025-2



WOOD STOVES



regency-fire.com

WHY CHOOSE REGENCY?

For the past 40+ years Regency has been focused on creating innovative, high-quality and reliable products that reduce heating costs and add true value to the home. We design all our products to be durable and last a lifetime so that our customers can enjoy them for years to come.

HIGH-QUALITY

Producing a high-quality product has been at the very heart of what we do from when that very first stove rolled off the production line over 40 years ago to today. We are ever-focused on producing quality products for our customers that will last for years to come.

BEST WARRANTY

A fireplace should be reliable and should work right the first time it is used, and the 1,000th. A core part of our business is making sure that we are building long-lasting, durable, high-quality products; we back-up that commitment with the industry's best warranty on all our products.

COST-EFFICIENT

Never before have home heating costs been higher. Turn your furnace way down and zone heat with our beautiful, reliable and convenient Regency products. Not only can you cut your fuel bills in half, but you'll be able to enjoy the timeless comfort of a Regency fire.

Why Regency? Because it's *more* than a fireplace!



TABLE OF CONTENTS

Regency Classic™ Wood Stoves	
F1150 & F2450	06
Regency Cascades™ Wood Stoves	
F1500 & F2500	08
Regency Pro-Series™ Wood Stoves	
F3500 & F5200	10
Technology	12
Accessories	14
Specifications	15





renewable • **affordable** • **beautiful**




REGENCY WOOD PRODUCTS



ECO-FRIENDLY

Regency wood inserts are EPA Certified so you burn less wood, produce fewer emissions, and get longer burns while keeping your home warm all year long.



HIGHLY EFFICIENT

Using more of the wood's available energy means less loading, less chopping, less effort, and most importantly less money spent on wood! Save money with highly efficient Regency wood products.



INDUSTRY'S BEST WARRANTY

Every product is backed by our lifetime limited warranty, and our hybrid products offer a 10-year, 100% warranty on the original combustor. The best in the industry!



QUALITY, DURABLE PRODUCTS

Regency wood products are manufactured right here in North America using high-quality thick gauge steel. All Regency products are designed from the ground up to be durable and to last generations.



ECO BOOST - TRIPLE BURN TECHNOLOGY

Triple stage burn technology delivers a system of high-efficiency, clean combustion and maximum heat control, all with less wood, less loading and less effort.

REGENCY CLASSIC™ F1150

Small Non-Catalytic Wood Stove



F1150 shown with wood storage pedestal

The Regency Classic small wood stove is perfect for smaller spaces, or for those needing to supplement their current heating system. Its compact footprint does not disappoint in heating capacity; burning efficiently from one load of wood.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Wood-finished handle
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front-mounted air adjustment
- Air operating safety tool
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge steel log retainers to stop logs from rolling
- Welded ash lip will never bend or break
- Rear heat deflector allowing for closer clearances
- Mobile home and alcove approved

OPTIONS

- Cast iron door with heat radiating ceramic glass in black or nickel accent
- Contemporary Door (Black only)
- Pedestal base
- Wood storage pedestal
- Bottom heat shield with cast iron legs in black or brushed nickel
- Ash drawer
- Variable-speed blower
- Convector airmate
- Outside air kit
- Mobile home kit
- Wood venting

SPECIFICATIONS

Maximum BTU*	55,000
Typical sq. ft. heated**	600 - 1,200
EPA Efficiency	77% LHV / 71% HHV
Max log size	18"
Burn time	Up to 8 hours
Emissions	1.3 g/h
Firebox size	0.98 cu. ft.
Flue size	6"

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 15 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

REGENCY CLASSIC™ F2450

Medium Non-Catalytic Wood Stove



F2450 shown with black classic door, bottom heat shield, black legs and rear heat deflector

This Regency Classic medium wood stove provides the perfect amount of heat for most spaces. Load wood in this stove front to back or side to side for the optimum convenience.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Wood-finished handle
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front-mounted air adjustment
- Air operating safety tool
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Welded ash lip will never bend or break
- Rear heat deflector allowing for closer clearances
- Mobile home and alcove approved

OPTIONS

- Cast iron door with heat radiating ceramic glass in black or nickel accent
- Pedestal base
- Wood storage pedestal
- Bottom heat shield with cast iron legs in black or brushed nickel
- Ash drawer
- 2-speed blower
- Convector airmate
- Outside air kit
- Mobile home kit
- Wood venting

SPECIFICATIONS

Maximum BTU*	75,000
Typical sq. ft. heated**	1,000 - 2,200
EPA Efficiency	72% LHV / 67% HHV
Max log size	18"
Burn time	Up to 10 hours
Emissions	1.4 g/h
Firebox size	2.3 cu. ft.
Flue size	6"

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 15 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

REGENCY CASCADES™ F1500

Small Hybrid Wood Stove



F1500 shown with nickel accent door, bottom heat shield, black legs and rear heat deflector.

The Regency Cascades F1500 small wood stove featuring Eco-Boost triple burn technology is a highly-efficient heater in a compact body that delivers exceptional heating capacity, long burn times, and low emissions.

FEATURES

- EPA 2020 certified
- Large fire viewing area, with heat radiating ceramic glass
- Wood-finished handle
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front-mounted air adjustment
- Air operating safety tool
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge steel log retainers to stop logs from rolling
- Welded ash lip will never bend or break
- Rear heat deflector allowing for closer clearances
- Mobile home approved

OPTIONS

- Cast iron door with heat radiating ceramic glass in black or nickel accent
- Contemporary door (Black only)
- Pedestal base
- Bottom heat shield with cast iron legs in black or brushed nickel
- Ash drawer
- Variable-speed blower
- Convector airmate
- Outside air kit
- Mobile home kit
- Wood venting

SPECIFICATIONS

Maximum BTU*	55,000
Typical sq. ft. heated**	600 - 1,200
EPA Efficiency	84% LHV / 78% HHV
Max log size	18"
Burn time	Up to 10 hours
Emissions	1.0 g/h
Firebox size	0.98 cu. ft.
Flue size	6"



* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 15 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

REGENCY CASCADES™ F2500

Medium Hybrid Wood Stove



F2500 shown with black door, pedestal and rear heat deflector.

The Regency Cascades F2500 delivers the same great looks as the F2450 with the addition of triple burn hybrid technology; delivering longer burn times, increased efficiency, and reducing emissions to an astonishing 1.4 gram/hour.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Wood-finished handle
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front-mounted air adjustment & catalytic bypass
- Air & bypass safe operation tool
- Easy-to-read catalytic thermometer helps your stove reach maximum burn times & efficiency
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Welded ash lip will never bend or break
- Rear heat deflector allowing for closer clearances
- Mobile home (*Approved in USA only*) and alcove approved
- 10-year, 100% coverage on the original catalyst

OPTIONS

- Cast iron door in black or nickel accent
- Pedestal base
- Wood storage pedestal
- Bottom heat shield with cast iron legs in black or brushed nickel
- Ash drawer
- 2-speed blower
- Convector airmate
- Outside air kit
- Wood venting

SPECIFICATIONS

Maximum BTU*	83,000
Typical sq. ft. heated**	1,000 - 2,200
EPA Efficiency	85% LHV / 78% HHV
Max log size	18"
Burn time	Up to 12 hours
Emissions	1.4 g/h
Firebox size	2.3 cu. ft.
Flue size	6"

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.
Refer to page 15 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.



REGENCY PRO-SERIES™ F3500

Large Hybrid Wood Stove



F3500 shown with airmate.

Enjoy a full, roaring fire with strong heat or adjust the flame to enjoy lower heat and gorgeous glowing embers. The choice is yours!

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front-mounted air adjustment & side mounted catalytic bypass
- Easy-to-read catalytic thermometer helps your stove reach maximum burn times & efficiency
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Welded ash lip will never bend or break
- Rear heat deflector allowing for closer clearances
- Mobile home and alcove approved
- 170° opening door for easy loading
- Heavy-duty 3/16 in. steel firebox
- 10-year, 100% coverage on original catalyst

OPTIONS

- Ash drawer with cover
- 2-speed blower
- Convector airmate
- Outside air kit
- Mobile home kit
- Wood venting

SPECIFICATIONS

Maximum BTU*	88,000
Typical sq. ft. heated**	1,500 - 2,500
EPA Efficiency	82% LHV / 76% HHV
Max log size	20"
Burn time	Up to 24 hours
Emissions	1.1 g/h
Firebox size	3.0 cu. ft.
Flue size	6"



* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 15 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

REGENCY PRO-SERIES™ F5200

Extra Large Hybrid Wood Stove



F5200 shown with airmate.

The F5200 wood stove lets you load an impressive 90 pounds of fuel. Its clean, classic design provides the perfect backdrop to the wide view cast door giving you a large fire view that will take your breath away!

FEATURES

- EPA 2020 certified
- Large fire viewing area, with heat radiating ceramic glass
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front-mounted air adjustment & side mounted catalytic bypass
- Easy-to-read catalytic thermometer helps your stove reach maximum burn times & efficiency
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Welded ash lip will never bend or break
- Rear heat deflector allowing for closer clearances
- Mobile home and alcove approved
- 170° opening door for easy loading
- Heavy-duty 3/16 in. steel firebox
- 10-year 100% coverage on the original catalyst

OPTIONS

- Ash drawer with cover
- 2-speed blower
- Convector airmate
- Outside air kit
- Wood venting



SPECIFICATIONS

Maximum BTU*	95,000
Typical sq. ft. heated**	1,500 - 3,000
EPA Efficiency	86% LHV / 80% HHV
Max log size	22"
Burn time	Up to 30 hours
Emissions	0.9 g/h
Firebox size	4.4 cu. ft.
Flue size	8"


* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 15 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

WOOD TECHNOLOGY

CASCADES SERIES COMBUSTOR

Triple stage burn technology delivers a system of high-efficiency, clean combustion & maximum heat control, all with less wood, less loading & less effort.

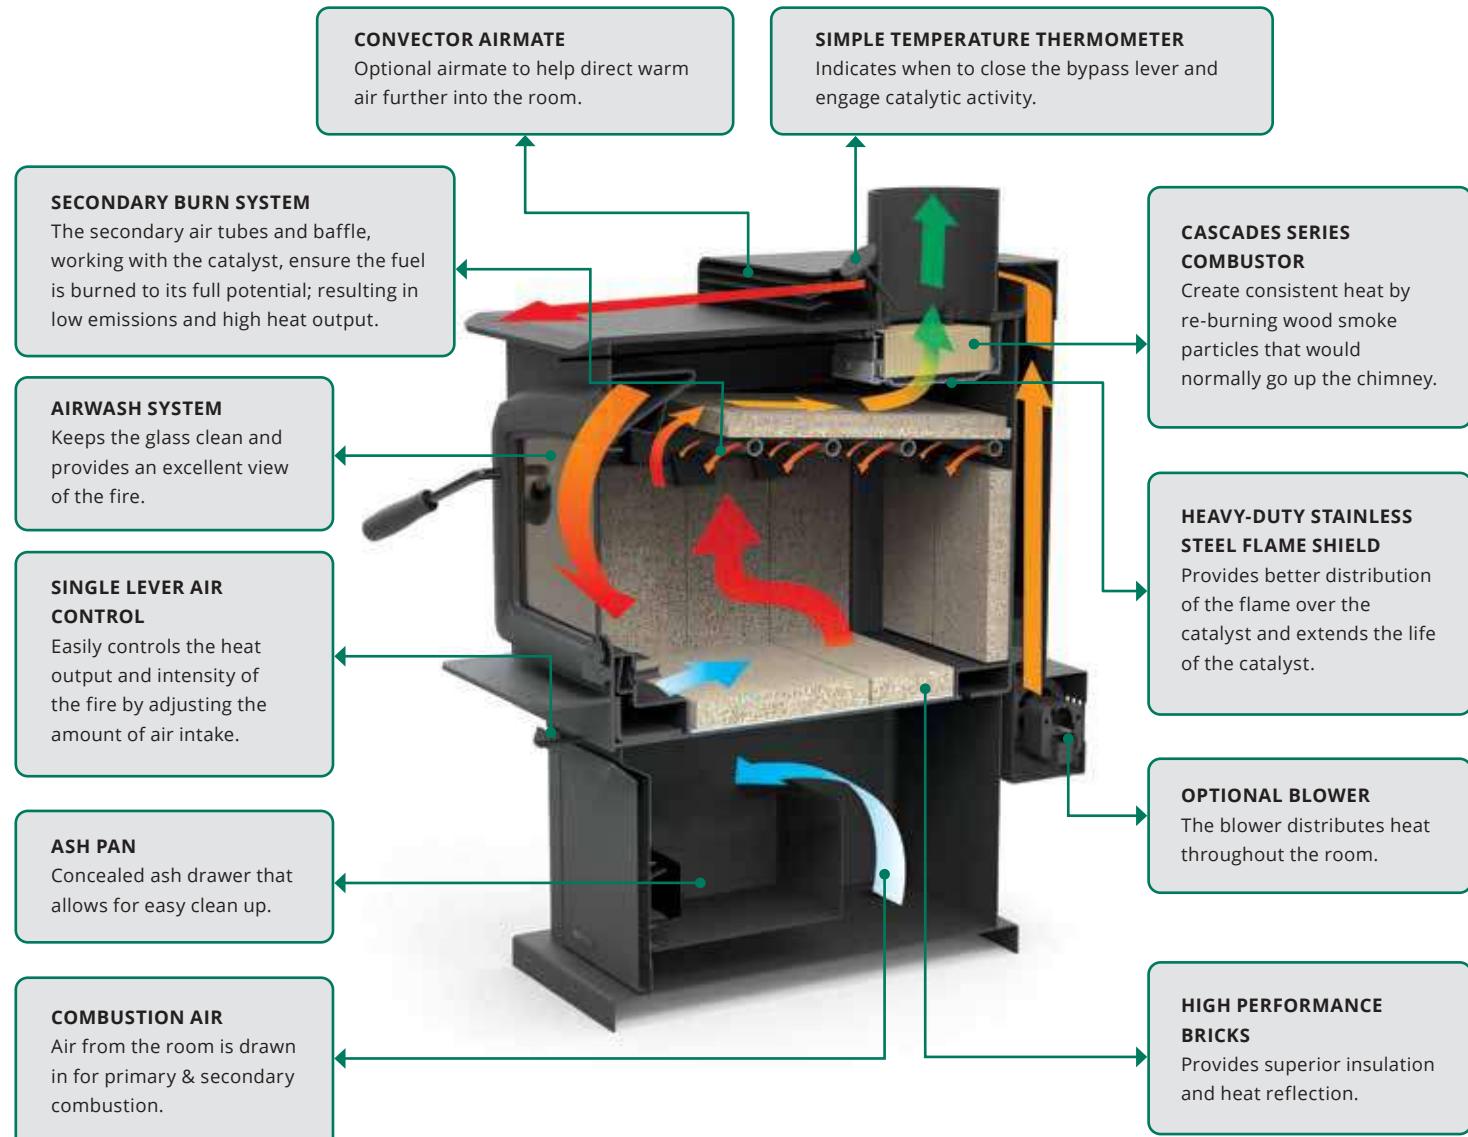

NOT SHOWN IN THE DIAGRAM

HEAVY-DUTY CAM LATCH
Ensures airtight seal for controlled airflow.


LEARN MORE ABOUT OUR
WOOD TECHNOLOGIES AT
regency-fire.com/videos



WOOD TECHNOLOGY

PRO SERIES COMBUSTOR

With Eco-Boost technology you get more out of your wood. Offering some of the highest efficiencies available anywhere, the Eco-Boost system uses more of the available energy in the wood, resulting in less loading, less chopping, and less hauling. The triple-stage burn significantly reduces emissions below EPA 2020 standards.

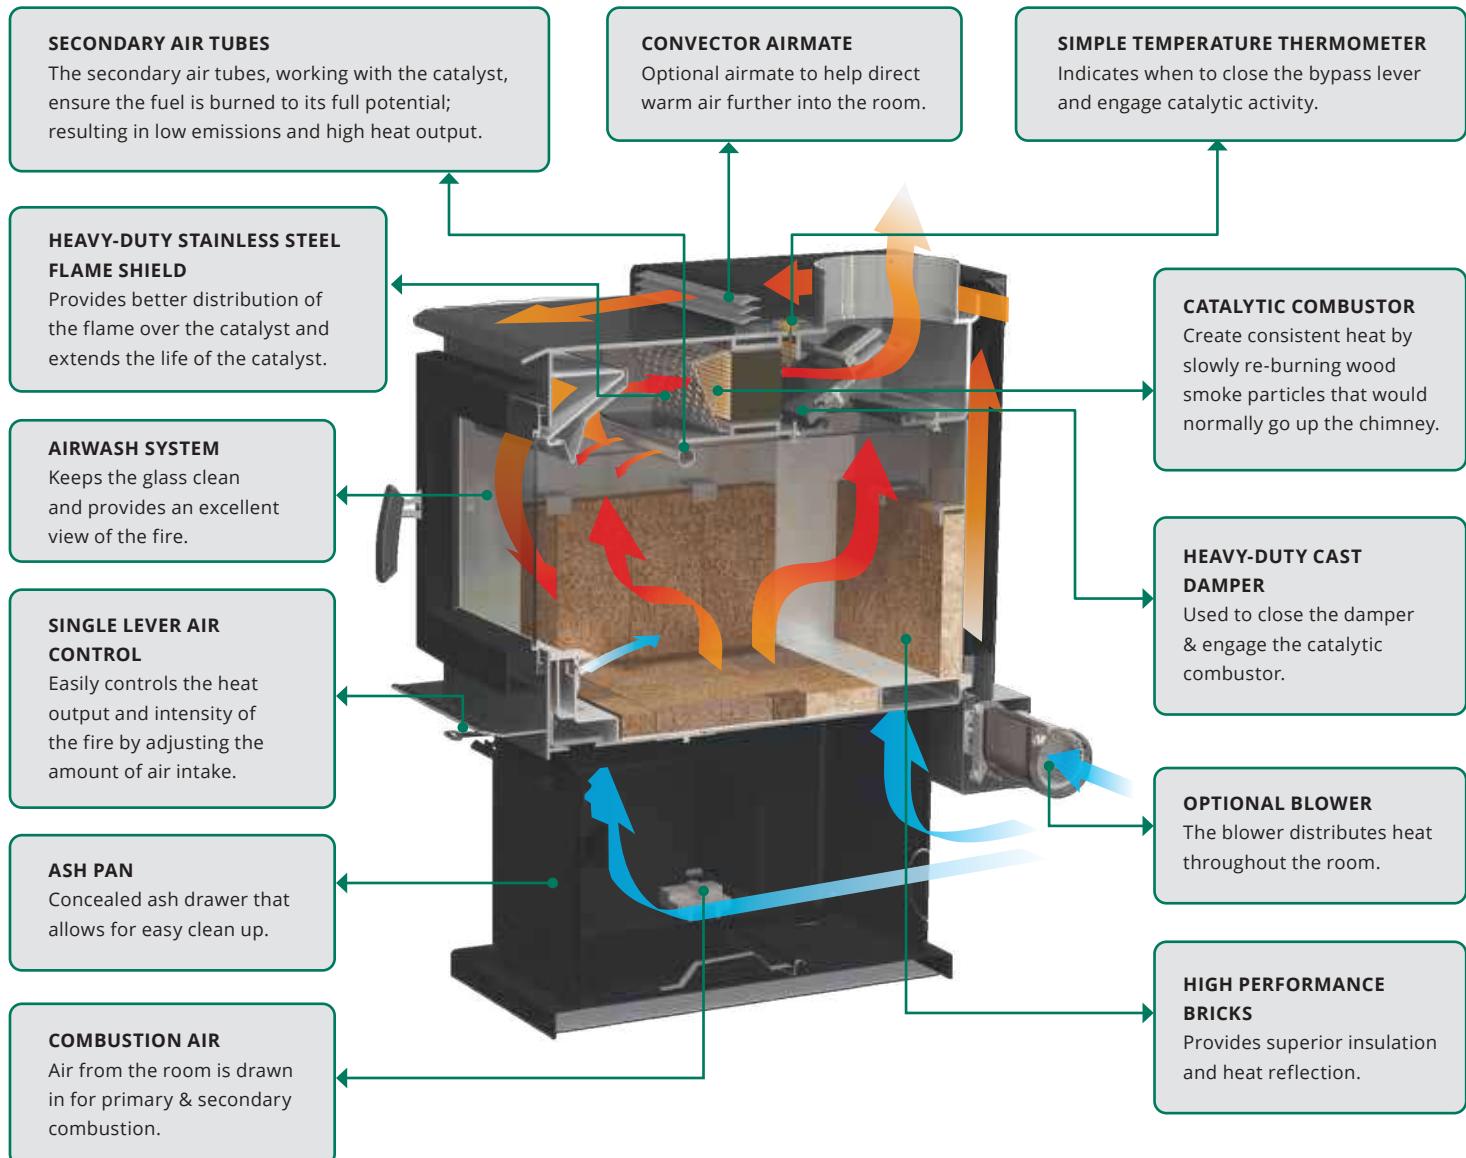

NOT SHOWN IN THE DIAGRAM

HEAVY-DUTY CAM LATCH
Ensures airtight seal for controlled airflow.

LEARN MORE ABOUT OUR
WOOD TECHNOLOGIES AT
regency-fire.com/videos



ACCESSORIES

CAST IRON DOORS (Classic & Cascade Series only)



Black cast iron door
(includes black hinge caps)



Nickel accent cast iron door
(includes nickel hinge caps)



Contemporary door

BASE OPTIONS



Brushed nickel cast iron legs*
(Classic & Cascade Series only)



Black cast iron legs*
(Classic & Cascade Series only)



Black Pedestal
(Included with the Pro-series)



Wood Storage Pedestal

*bottom heat shield required

CONVECTOR AIRMATE



The convector airmate scoops superheated air from the back and top of the stove and directs it to the living area in front. This heat dispersion reduces temperatures behind the unit and allows it to be installed even closer to the wall.

ASH DRAWER



The concealed and discrete ash drawer offers a convenient way to store your ashes. Use the included cover to keep the ash contained before it is disposed of outside.
NOTE: Cover is not available when installed with leg option.

SPECIFICATIONS


SPECIFICATIONS	F1150	F2450	F1500	F2500	F3500	F5200
Maximum BTU*	55,000	75,000	55,000	83,000	88,000	95,000
Typical sq. ft. heated**	600 - 1,200	1,000 - 2,200	600 - 1,200	1,000 - 2,200	1,500 - 2,500	1,500 - 3,000
EPA Efficiency	77% LHV 71% HHV	72% LHV 67% HHV	84% LHV 78% HHV	85% LHV 78% HHV	82% LHV 76% HHV	86% LHV 80% HHV
Max log size	18"	18"	18"	18"	20"	22"
Burn time* (up to)	Up to 8 hours	Up to 10 hours	Up to 10 hours	Up to 12 hours	Up to 24 hours	Up to 30 hours
Emissions	1.3 g/h	1.4 g/h	1.0 g/h	1.4 g/h	1.1 g/h	0.84 g/h
Firebox size	0.98 cu. ft.	2.3 cu. ft.	0.98 cu. ft.	2.3 cu. ft.	3.0 cu. ft.	4.4 cu. ft.
Flue size	6"	6"	6"	6"	6"	8"

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.


** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

BTU CALCULATION METHOD: Max BTUs are calculated by taking an average fillable volume of 95% of the stove's capacity, multiplied by 19.5 pounds per square foot and an average of 9100 BTUs per pound of wood. Factoring in the listed efficiency, 15% moisture content and dividing by the proven burn time at the high heat setting.


DIMENSIONS



FRONT (PEDESTAL)



FRONT (LEGS)

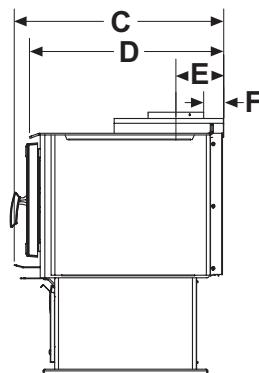


SIDE

UNITS	A	B	C	D	E	F	G
F1150	32-5/16"	24"	20"	17-3/8"	6-1/2"	--	31-7/16"
F2450	34-5/8"	24"	27-1/8"	24-13/16"	6-7/16"	--	33-7/8"
F1500	32-3/4"	24"	20"	17-3/8"	6-1/2"	--	32"
F2500	34-5/8"	25"	27-1/8"	24-13/16"	6-7/16"	--	33-7/8"
F3500	36"	26"	28"	26"	6-1/2"	3"	--
F5200	39-3/4"	29"	31-3/16"	28-15/16"	7-1/8"	3"	--

SPECIFICATIONS

MINIMUM CLEARANCE TO COMBUSTIBLE MATERIALS

Please read the section below carefully as clearances depend on whether the optional airmate convector or the rear heat deflector is installed on the stove. Measurements "From Unit" are from the top plate of the stove to a side wall or to a corner, and from the rear heat shield to a back wall.

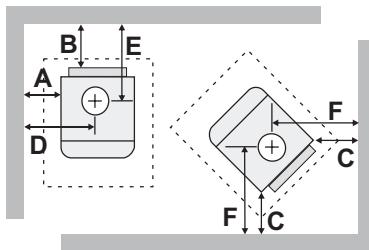

NOTE: Be aware that local Codes and Regulations may override some clearances listed in this manual. Check with your local inspector. Clearances to combustibles are for the safety of the property. To avoid overheating and damaging the appliance these clearances should be maintained for non-combustibles also.

RESIDENTIAL INSTALLATION "C" VENT (SINGLE WALL)	FROM UNIT		FROM CORNER		FROM FLUE CENTER-LINE	
	A	B	C	D	E	F
F1150	with AirMate or with Rear Deflector	13"	10-1/2"	9"	25"	17-1/16"
F2450	with AirMate	16"	9-1/2"	8"	28"	16"
	with Rear Deflector	16"	11-1/2"	8"	28"	18"
F1500	with AirMate or with Rear Deflector	11"	10-1/2"	9"	23"	17-1/16"
F2500	with AirMate	15-1/2"	8-1/2"	6-3/4"	28"	15"
	with Rear Deflector	15-1/2"	10-1/2"	6-3/4"	28"	17"
F3500	with AirMate or with Rear Deflector	11"	9-1/2"	8"	24"	16"
F5200	Not Approved with "C" Vent (Single Wall)					

MOBILE HOME CLOSE CLEARANCE (TO BE INSTALLED WITH REQUIRED PIPE COMPONENTS)

When the stove is installed as a close clearance residential unit, a listed double wall connector is required from the stove collar to the ceiling level.

MOBILE HOME CLOSE CLEARANCE (TO BE INSTALLED WITH REQUIRED PIPE COMPONENTS)	FROM UNIT		FROM CORNER		FROM FLUE CENTER-LINE	
	A	B	C	D	E	F
F1150	with AirMate or with Rear Deflector	11"	7"	5"	23"	13-9/16" 17"
F2450	with AirMate	15"	8"	6"	27"	14-1/2" 18"
	with Rear Deflector	15"	10"	6"	27"	16-1/2" 18"
F1500	with AirMate or with Rear Deflector	9"	5"	5"	21"	11-9/16" 17"
F2500	with AirMate	14-1/2"	7"	4-3/4"	27"	13-1/2" 17"
	with Rear Deflector	14-1/2"	9"	4-3/4"	27"	15-1/2" 17"
F3500	with AirMate or with Rear Deflector	11"	9-1/2"	8"	24"	16" 20-1/2"
F5200	with AirMate or with Rear Deflector	11"	10"	8"	25-1/2"	17-1/8" 22-1/2"


RESIDENTIAL CLOSE CLEARANCE (TO BE INSTALLED WITH REQUIRED PIPE COMPONENTS)

When the stove is installed as a close clearance residential unit, a listed double wall connector is required from the stove collar to the ceiling level.

RESIDENTIAL CLOSE CLEARANCE (TO BE INSTALLED WITH REQUIRED PIPE COMPONENTS)	FROM UNIT		FROM CORNER		FROM FLUE CENTER-LINE	
	A	B	C	D	E	F
F1150	with AirMate or with Rear Deflector	11"	7"	5"	23"	13-9/16" 17"
F2450	with AirMate	15"	8"	6"	27"	14-1/2" 18"
	with Rear Deflector	15"	10"	6"	27"	16-1/2" 18"
F1500	with AirMate or with Rear Deflector	9"	5"	5"	21"	11-9/16" 17"
F2500	with AirMate	14-1/2"	7"	4-3/4"	27"	13-1/2" 17"
	with Rear Deflector	14-1/2"	9"	4-3/4"	27"	15-1/2" 17"
F3500	with AirMate or with Rear Deflector	11"	9-1/2"	8"	24"	16" 20-1/2"
F5200	with AirMate or with Rear Deflector	11"	10"	8"	25-1/2"	17-1/8" 22-1/2"

MINIMUM ALCOVE CLEARANCE TO COMBUSTIBLE MATERIALS

The Regency® Freestanding models have been alcove approved and must be installed with a listed double wall connector to the ceiling level. Min. alcove ceiling height: 83" Max. depth of alcove is 48"




MINIMUM ALCOVE CLEARANCE	FROM UNIT		FROM FLUE CENTER-LINE		FROM WALL	
	G	H	I	J	K	
F1150	with AirMate or with Rear Deflector	11"	7"	23"	13-9/16"	46"
F2450	with AirMate	15"	8"	27"	14-1/2"	54"
	with Rear Deflector	15"	10"	27"	16-1/2"	54"
F1500	with AirMate or with Rear Deflector	9"	5"	21"	11-5/8"	46"
F2500	with AirMate	14-1/2"	7"	27"	13-1/2"	54"
	with Rear Deflector	14-1/2"	9"	27"	15-1/2"	54"
F3500	with AirMate or with Rear Deflector	11"	9-1/2"	24"	16"	60"
F5200	with AirMate or with Rear Deflector	11"	10"	25-1/2"	17-1/8"	63"

SPECIFICATIONS

FLOOR PROTECTION

USA FLOOR PROTECTION	X	RESIDENTIAL "C" VENT		RESIDENTIAL CLOSE CLEARANCE		MOBILE HOME CLOSE CLEARANCE		ALCOVE	
		Y	Z	Y	Z	Y	Z	Y	Z
F1150	39-3/8"	40"	8"	40"	8"	40"	8"	40"	8"
F2450	40-3/8"	47"	8"	47"	8"	47"	8"	47"	8"
F1500	39-3/8"	40"	8"	40"	8"	40"	8"	40"	8"
F2500	40-3/8"	47"	8"	48"	8"	47"	8"	47"	8"
F3500	41-5/8"	46-1/2"	8"	46-1/2"	8"	46-1/2"	8"	46-1/2"	8"
F5200	45"	Not Approved	Not Approved	51-1/8"	8"	51-1/8"	8"	51-1/8"	8"

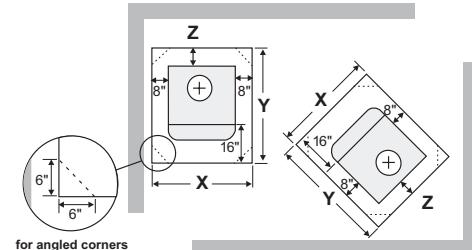

CANADA FLOOR PROTECTION	X	RESIDENTIAL "C" VENT		RESIDENTIAL CLOSE CLEARANCE		MOBILE HOME CLOSE CLEARANCE		ALCOVE	
		Y	Z	Y	Z	Y	Z	Y	Z
F1150	39-3/8"	42"	8"	42"	8"	42"	8"	42"	8"
F2450	40-3/8"	49"	8"	49"	8"	49"	8"	49"	8"
F1500	39-3/8"	42"	8"	42"	8"	42"	8"	42"	8"
F2500	40-3/8"	49"	8"	49"	8"	49"	8"	49"	8"
F3500	41-5/8"	48-1/2"	8"	48-1/2"	8"	48-1/2"	8"	48-1/2"	8"
F5200	45"	Not Approved	Not Approved	53-1/8"	8"	53-1/8"	8"	53-1/8"	8"

NOTE : In Canada, floor protection must extend 18" (457mm) to the front and 8" (203mm) to back of the stove.
If the rear clearance to combustibles is less than 6" (152mm) for corner installations the rear corners may be angled to take advantage of the closer clearances.

USA FLOOR PROTECTION CORNER HEARTH REQUIREMENTS	RESIDENTIAL "C" VENT				RESIDENTIAL CLOSE CLEARANCE			
	L	M	N	O	L	M	N	O
F1150	39-3/8"	55-3/16"	48-11/16"	20-7/8"	39-3/8"	49-1/2"	44-11/16"	16-7/8"
F2450	40-3/8"	61-7/16"	53-7/16"	24-15/16"	40-3/8"	58-9/16"	51-7/16"	22-15/16"
F1500	39-3/8"	55-3/16"	48-11/16"	20-7/8"	39-3/8"	49-1/2"	44-11/16"	16-7/8"
F2500	40-3/8"	59-5/8"	52-1/4"	23-11/16"	40-3/8"	56-13/16"	50-1/4"	21-11/16"
F3500	41-5/8"	63"	53-5/8"	24-3/16"	41-5/8"	63"	53-5/8"	24-3/16"
F5200	Not approved				45"	73-1/2"	63-11/16"	31-7/8"

Reference only when hearth pad is installed to rear wall at minimum pipe clearances.

CANADA FLOOR PROTECTION CORNER HEARTH REQUIREMENTS	RESIDENTIAL "C" VENT				RESIDENTIAL CLOSE CLEARANCE			
	L	M	N	O	L	M	N	O
F1150	39-3/8"	57-3/16"	50-1/8"	22-1/4"	39-3/8"	51-1/2"	46-1/8"	18-1/4"
F2450	40-3/8"	63-7/16"	54-7/8"	26-5/16"	40-3/8"	60-9/16"	52-7/8"	24-5/16"
F1500	39-3/8"	57-3/16"	50-1/8"	22-1/4"	39-3/8"	51-1/2"	46-1/8"	18-1/4"
F2500	40-3/8"	61-5/8"	53-5/8"	25-1/16"	40-3/8"	58-13/16"	51-5/8"	23-1/16"
F3500	41-5/8"	65"	55"	25-5/8"	41-5/8"	65"	55"	25-5/8"
F5200	Not approved				45"	75-1/2"	64-11/16"	33-7/8"

Reference only when hearth pad is installed to rear wall at minimum pipe clearances.

DISCLAIMER: Please always refer to the manual for the latest up to date installation details.

DESIGN INSPIRATION

“

Great products, North American made, good customer service! Our wood stove keeps us warm and cozy all winter.

”



CHARLENE L. – GOOGLE REVIEW



“

We recently replaced a clunky, unattractive, barely functional gas fireplace with a stylish, elegant, wonderfully efficient Regency wood stove, and we couldn't be happier. It heats virtually our entire 2,200 sq. ft. 2-story for hours with as few as 4 good logs. We are impressed with its design, its appearance, and are very pleased with its performance. We can't recommend it enough.

”



ERIKA P. – GOOGLE REVIEW



READY TO BUY



GUARANTEED QUALITY - BEST INDUSTRY WARRANTY

All Regency Fireplaces are manufactured in North America in our state-of-the-art manufacturing facility. When choosing to purchase a Regency wood stove, you choose high-quality craftsmanship, top-tier materials, and industry-leading support!

Add the warmth and comfort of a fireplace to your home, create memories that will last a lifetime, and rest easy knowing that your Regency wood stove is backed by the best warranty in the industry.

Every product is backed up with our lifetime limited warranty, and our hybrid products offer a 10-year, 100% warranty on the original combustor. The best in the industry!



Find More Products at **REGENCY-FIRE.COM**

Your Regency Dealer

©2025 FPI Fireplace Products International Ltd. Regency®, Regency Cascades™, Regency Classics™, Regency Pro-Series™, and Hampton® are registered or proprietary trademarks of FPI Fireplace Products International Ltd. All rights reserved.

Printed in Canada (06/25) Part no. 944-438

Version No: 2025-2



ELECTRIC INSERTS & FIREPLACES



regency-fire.com

WHY CHOOSE REGENCY?

Regency has established itself as a provider of high-quality products for more than 40 years. As a result, our customers are able to choose from a diverse range of premium and sustainable heating options and enjoy durable products that last a lifetime.

SAFE FOR KIDS

Regency's new electric fireplaces provide the comfort and ambiance of a traditional fireplace without the need for gas lines and vents. Since there is no combustion, the glass does not heat up which makes it fitting for kid-friendly environments.

HIGH RISE FRIENDLY

With electric fireplaces, there is no need for fuel lines, chimneys, or exterior venting which allows them to be installed into virtually any space. As a result, they are the perfect candidate for apartments and condos.

EASY INSTALLATION

Choose between a plug or hardwire kit (provided with each fireplace), to have endless spaces as installation options. This trouble-free installation also presents benefits in the form of cost savings and minimal time to set up.

Why Regency? Because it's **more** than a fireplace!

TABLE OF CONTENTS

Regency Atmosphere LCD Electric Insert	06
Ei29LCD, Ei33LCD	
Regency Electric Inserts	08
Ei25, Ei29, Ei33	
Regency Electric Fireplaces	10
E36LCD, E800LCD	
Regency Studio Fireplaces	12
ES105, ES135, ES165	
Regency Skope Fireplaces	16
E110, E135, E150, E195	
Regency Onyx Fireplaces	20
EX110, EX150, EX190	
Specifications	30

Electric Inserts

Transform Your Space •



FRONT OPTIONS




3-sided & 4-sided
Finishing Trim
(included)



Flush 3-Sided Faceplate



Flush 4-Sided Faceplate



Oversize Backing Plate

PREMIUM SURROUNDS



Black



White



Sunset Bronze



Grey



Brushed Nickel

TRADITIONAL SURROUNDS



Black



Brushed Antique
Copper

CUSTOM FACEPLATES



Custom 3-sided Faceplate



Custom 4-sided Faceplate

LOG SET OPTIONS



Split Oak



Birch



Driftwood

Electric Inserts

Flames so realistic, you'll forget it's electric! The Regency lineup of modern electric inserts combines expert craftsmanship with sleek, contemporary design. Enhanced flame effects and extra-deep beds of lifelike logs or crystals create stunning depth and realism. Featuring advanced Chromalight LED technology with a wide range of lighting combinations, these inserts deliver captivating visuals and a true 3D flame experience. With high-efficiency heating, a clean modern look, and easy installation, Regency electric inserts are an effortless choice for comfort and style.



Ei33 shown with 3-sided finishing trim and Birch log set

REGENCY ATMOSPHERE Ei29LCD

Premium Electric Insert



Ei29LCD show with driftwood logs, 3 sided faceplate and premium white surround

FEATURES

- Option to install as a 5,000 BTU heater with 120V and combustible materials, or 9,500 BTU heater with 240V and non-combustible materials
- LCD screen with 9 unique flame options, spark effects, and crackling sounds
- Top-down lighting enhances realism and reflection on the log set, providing a sense of depth
- 14 fuel bed colour options and 5 levels of brightness
- Pick one colour to suit your vibe or automatically cycle through them all
- Customize your look with split oak, birch, or driftwood-style log sets
- Included remote control to adjust the power, heater, flames, brightness, and desired temperature
- Option to control the power, flame, and heater with discreet integrated buttons
- 3 and 4-sided finishing trims are included, for an easy out-of-the-box install

DIMENSIONS

Width (front)	29-1/2"
Width (back)	22-15/16"
Height	19-7/8"
Depth	12"

REGENCY ATMOSPHERE Ei33LCD

Premium Electric Insert



Ei33LCD shown with 4 Sided trim and Split Oak log set

FEATURES

- Option to install as a 5,000 BTU heater with 120V and combustible materials, or 9,500 BTU heater with 240V and non-combustible materials
- LCD screen with 9 unique flame options, spark effects, and crackling sounds
- Top-down lighting enhances realism and reflection on the log set, providing a sense of depth
- 14 fuel bed colour options and 5 levels of brightness
- Pick one colour to suit your vibe or automatically cycle through them all
- Customize your look with split oak, birch, or driftwood-style log sets
- Included remote control to adjust the power, heater, flames, brightness, and desired temperature
- Option to control the power, flame, and heater with discreet integrated buttons
- 3 and 4-sided finishing trims are included, for an easy out-of-the-box install

DIMENSIONS

Width (front)	33-1/2"
Width (back)	27"
Height	23-1/4"
Depth	12"

REGENCY ATMOSPHERE ELECTRIC INSERTS

Ei25 • Ei29 • Ei33

Small, Medium and Large Electric Inserts



Ei29 shown with 3 sided flush faceplate and Split Oak log set

FEATURES

- Option to install as a 5,000 BTU heater or 9,500 BTU heater
- High-impact, realistic orange & red flame pattern that provides the utmost realism with 5 levels of brightness
- Top-down lighting enhances realism and reflection on the log set, providing a sense of depth
- Pulsing, Dynamic Fuel Bed lighting with a spectrum of different colours to enhance your mood with 5 levels of brightness
- High-definition, 3D Layered Oak log set complete with Charcoal Logs, Embers, Ginger Crystals & Grate - the most realistic electric media package in the industry
- Customize your look with a hand-crafted artisan birch or driftwood-style log set
- Included thermostatic remote control to adjust the power, heater, flames, brightness and desired temperature
- Option to control the power, flame and heater with discreetly integrated buttons
- 3 and 4-sided finishing trims are included, for an easy out-of-the-box install

FLAME VIEWING AREA

Ei25	25" W x 16" H
Ei29	29" W x 19" H
Ei33	33" W x 23" H



Ei33 shown with 3 sided flush faceplate, Sunset Bronze surround and Split Oak log set



Ei25 shown with 3 sided finishing trim and Birch log set

REGENCY ATMOSPHERE E36LCD

Electric Fireplace



E36LCD show with oak logs

Featuring all the benefits of the Atmosphere lineup, the E36LCD brings breathtaking beauty and flame pictures to our electric fireplace lineup. Offering a new perspective, this rectangular unit complements our new E800LCD and existing electric fireplace lineup beautifully, offering a new style, premium log sets, 14 fuel bed options, 9 flame settings, and so much more. Experience the unmatched beauty of our Atmosphere collection, but as a Fireplace!

FEATURES

- Option to install as a 5,000 BTU heater with 120V and combustible materials, or 9,500 BTU heater with 240V and non-combustible materials
- LCD screen with 9 unique flame options, spark effects, and crackling sounds
- Top-down lighting enhances realism and reflection on the log set, providing a sense of depth
- 14 fuel bed colour options and 5 levels of brightness
- Pick one colour to suit your vibe or automatically cycle through them all
- Customize your look with split oak, birch, or driftwood-style log sets
- Included remote control to adjust the power, heater, flames, brightness, and desired temperature
- Option to control the power, flame, and heater with discreet integrated buttons
- 3 and 4-sided finishing trims are included, for an easy out-of-the-box install

DIMENSIONS	
Width (front)	36-1/2"
Width (back)	30"
Height	26"
Depth	12"

REGENCY GRANDVIEW E800LCD

Electric Fireplace



E800LCD shown with oak logs

The Grandview E800LCD brings the design flexibility and customization from our popular Gas Fireplaces to our brand-new electric fireplace line. The Grandview E800LCD is the first in our newest format of traditional electric fireplaces from Regency. Combined with a true-to-life LCD flame package and high-definition, robust log set, the E800LCD delivers the most realistic fireplace experience from an electric fireplace.

FEATURES

- Option to install as a 5,000 BTU heater with 120V and combustible materials, or 9,500 BTU heater with 240V and non-combustible materials
- LCD screen with 9 unique flame options, spark effects, and crackling sounds
- Top-down lighting enhances realism and reflection on the log set, providing a sense of depth
- 14 fuel bed colour options and 5 levels of brightness
- Pick one colour to suit your vibe or automatically cycle through them all
- Customize your look with split oak, birch, or driftwood-style log sets
- Included remote control to adjust the power, heater, flames, brightness, and desired temperature
- Option to control the power, flame, and heater with discreet integrated buttons
- 3 and 4-sided finishing trims are included, for an easy out-of-the-box install

DIMENSIONS	
Width	33-3/4"
Height	33-3/4"
Depth	11-5/8"

Studio Electric Fireplaces

Mesmerizing flame visuals. Ultra-realistic, artisanal log sets. Atmospheric mood lighting. The Studio collection brings all this and so much more to your living room at the touch of a button.

The Studio's remarkably realistic fuel effects are the result of our decades of experience working with real wood burning stoves and fires. For the utmost realism, sections of the log sets glow when the fire's flames and ember bed are activated, just like real burning logs. All Studio sizes come with a Split Oak log set. For a unique touch, an optional Birch log set creates an alternative but equally captivating display.



Studio Fireplaces

Enchanting Flame Visuals •

CHOOSE YOUR SIZE

Available in three sizes, the convenience of electric heat can be added to even the smallest spaces of your home.



Studio ES105

44" W x 19" H x 8" D



Studio ES135

56" W x 19" H x 8" D



Studio ES165

65" W x 19" H x 8" D

IMMERSIVE EMBER BED UP-LIGHTING

The Studio's Chromalight up-lighting system shines through the fire's fuel bed and illuminates the log set from below. In addition to a natural amber glow, the ember bed up-lighting can be set to a range of different colours to create a bespoke display. There is also the gradually changing Spectrum mode, which transitions through each colour.

ENCHANTING FLAME VISUALS

Flame effects can be customized to suit your mood, with three combinations of varying tones and intensity settings. Choose from a vibrant flame picture that casts a rich glow over a darkened room, or opt for some background ambience – great for when you're watching a movie.



Studio ES135 with a Split Oak log set

REGENCY STUDIO ES105 • ES135 • ES165

Single-Sided Electric Fireplaces



Studio ES105 with a Birch Log Set

FEATURES

- Enjoy the cozy ambiance of a stunning 13" glass viewing height
- Multi-Colour LED Lighting
- Life-like glowing ember bed with an artfully crafted oak log set & ember media (included)
- Thermostatic remote control (included) can be set, adjusted, and programmed (daily & weekly) to turn the fireplace on or off at your desired temperature and time
- A 5,000 BTU electric heater paired with a blower to heat your home efficiently & sustainably
- Fully recessed with a clean trim providing a contemporary style
- Optional realistic birch log set
- Optional mood lighting kit with up to 10ft of LED strip lights (per kit)
See Page 20 for details

FLAME VIEWING AREA

ES105 40" W x 13" H

ES135 52" W x 13" H

ES165 62" W x 13" H



Studio ES165 with a Birch log set



Studio ES135 with a Split Oak log set



Skope Fireplaces

Ambiance on Command •

Skope Electric Fireplaces

Skope offers the perfect balance of quality and value. With its stylish design options, convenient installation, and user-friendly features, Skope provides a versatile and hassle-free solution for creating a cozy ambiance in any living space. Combining eco-consciousness with modern convenience, Skope electric fireplaces brings the allure of a traditional fireplace without the need for venting or maintenance. Experience the beauty and comfort of a flickering flame with Skope, designed to enhance your home and elevate your lifestyle.

CHOOSE YOUR SIZE

The Skope fireplace allows you to find the perfect fit to create a statement centerpiece in your home.

Available in four sizes, each fire can be installed in a variety of ways to create a statement focal point in your home.



Skope E110

44" W x 22" H x 10" D



Skope E135

54" W x 22" H x 10" D



Skope E150

60" W x 22" H x 10" D



Skope E195

78" W x 22" H x 10" D

Single, left or right corner, and three-sided options - all from the same fire.



Single-sided



Two-sided corner



Three-sided



REGENCY SKOPE E110 • E135 • E150 • E195

Multi-Sided Electric Fireplaces



Skope E110 with a Split Oak log set, installed as a two-sided corner fireplace

FEATURES

- Lounge in the warmth of vivid flames with a dramatic 15" glass viewing height
- 1-Sided Linear, 2-Sided Corner, or 3-Sided Bay installation options
- Programmable app control on iOS and Android devices
- Life-like glowing ember bed with an artfully crafted oak log set, ember media and crystal ice media (included)
- A 5,000 BTU electric heater paired with a blower to heat your home efficiently and sustainably
- Chromalight® Designer LED System
- Thermostatic remote control (included) can be used to set a timer and adjust to your desired temperature
- Use the app to set, adjust, and program the fireplace (daily and weekly) to turn on or off at your desired temperature and time
- Fully recessed without the need for trims providing a high-end contemporary style
- Optional realistic Birch log set
- Optional mood lighting kit with up to 10ft of LED strip lights (per kit)

FLAME VIEWING AREA

E110	43" W x 15" H
E135	53" W x 15" H
E150	59" W x 15" H
E195	77" W x 15" H



Skope E195 with a Split Oak log set, installed as a three-sided fireplace



Skope E135 with a Split Oak log set, installed as a single-sided fireplace



Onyx Fireplaces

Experience the Exceptional •

Onyx Electric Fireplaces

The Onyx line delivers on a new definition of electric fire innovation. The finest crisp flame visuals appear to dance and soar between true-to-life log sets, dynamically lit from all angles for absolute immersion. But the Onyx is far more than an electric fire. Layer upon layer of visual technology weaves a palette of captivating lighting effects, which can be adjusted to transform your space. The result? An ethereal experience tailored to every mood that will leave you in awe.

CHOOSE YOUR SIZE

The Onyx fireplace is designed to work with your style and interior décor.

Available in three sizes, each fire can be installed in a variety of ways to create a statement focal point in your home.



Onyx EX110

45" W x 25" H x 13" D



Onyx EX150

61" W x 25" H x 13" D



Onyx EX190

78" W x 25" H x 13" D

Single, left or right corner, and three-sided options - all from the same fire.



Single-sided



Two-sided corner



Three-sided



REGENCY ONYX EX110 • EX150 • EX190

Single-Sided or Multi-Sided Electric Fireplaces



Onyx EX110 with a Split Oak log set, installed as a two-sided corner fireplace

FEATURES

- Elevate any living space with a luxurious 17" glass viewing height
- 1-Sided Linear, 2-Sided Corner, or 3-Sided Bay installation options
- Programmable app control on iOS and Android devices
- Life-like glowing ember bed with an artfully crafted oak log set and ember media (included)
- A 5,000 BTU electric heater paired with a blower to heat your home efficiently and sustainably
- Chromalight® Plus Designer LED System
- Thermostatic remote control (included) can be used to set a timer and adjust to your desired temperature
- Use the app to set, adjust, and program the fireplace (daily and weekly) to turn on or off at your desired temperature and time
- Fully recessed without the need for trims providing a high-end contemporary style
- Optional realistic Birch log set
- Optional mood lighting kit with up to 10ft of LED strip lights (per kit)

FLAME VIEWING AREA

EX110 43" W x 17" H

EX150 59" W x 17" H

EX190 76" W x 17" H



Onyx EX190 with a Birch log set, installed as a two-sided corner fireplace



Onyx EX150 with a Split Oak log set, installed as a three-sided fireplace



Convenient Control •

Both the innovative App and Remote Control allow you to adjust the Regency Electric Fireplace's array of Chromalight® visuals and convenient heating settings.

NOTE: App is not available for Studio Fireplaces. Not all functions are available on Skope & Studio Fireplaces. Refer to specific product manuals for detailed remote functions.

MAIN FLAME AND FLAME PALETTE

The primary and secondary flames can be independently set to eight different colours or the Spectrum Mode, a rolling cycle that gradually transitions through all colours. Speed and brightness can be tailored to create a customized visual.

GLOWING EMBERS

Beneath the logs and ember effects, the up-lighting LEDs can be set to eight colours to either match or contrast with the flames. Like the flames, there is also a Spectrum Mode to cycle through each colour as well as adjustable brightness for all settings.

NATURAL LOG LIGHTING

Burnt Ember Logs illuminate the Oak or Birch log sets, and feature 12 colours and a Spectrum Mode setting with adjustable brightness.

DOWN-LIGHTING

Hidden in the top of the firebox are discreet down lighting LEDs which bathe the fuel effects in eight different hues to either match or contrast with the other settings, adding to the immersion.

SYNCHRONISE VISUALS

The Sync feature lets you synchronise the Ember bed up-lighting and down-lighting with the Main Flame colour, to easily create a corresponding display.

QUICK START PRE-SETS

Need instant ambiance? Select from any of the six stunning pre-sets ranging from natural to contemporary. You can also save up to three custom combinations with your preferred settings for easy access.



OPTIONAL MOOD LIGHTING

Effortlessly control the optional Mood Lighting system using either the remote control or the app. Choose from 13 different colours or the gradually changing Spectrum mode to transition through each colour.

ADAPTIVE START CONTROL

Adaptive Start allows the fireplace to automatically turn on up to 45 minutes in advance of a pre-set time to reach the desired room temperature, ready for when you sit down and relax.

TIMERS AND SCHEDULING

The fireplace also allows you to programme individual day and weekly schedules for both flames and heat, providing warmth or ambience exactly when you want it.

OPEN WINDOW DETECTION

Should ambient room temperatures drop by 4°C within a space of five minutes, like when a window is opened, the fireplace's heater will automatically turn off to save energy. Heating can be easily resumed with the remote control or app.

THERMOSTATIC HEATING

Choose your preferred room temperature and the fireplace does the rest for you. Select between 15°C and 25°C and the fire's 1.5 kW heater will adjust its power to reach the desired level as efficiently as possible. Turn off the heat entirely to enjoy the visuals during the warmer months.



Fireplace & TV Size Guide •



SUGGESTED SIZING FOR YOUR FIREPLACE AND TV

Choosing the size of your electric fireplace and your TV will come down to both the space you have available and your personal preference. Actual TV sizes vary across manufacturers, and the way your TV is fitted (for example into a cavity recess) will also impact the way it looks in relation to your Regency fireplace. Your retailer will often be able to help you size up your fireplace and TV to achieve the perfect look.

MODEL	ONYX			SKOPE				STUDIO		
PRODUCT NAME	EX110	EX150	EX190	E110	E135	E150	E195	ES105	ES135	ES165
TV SIZE*	43" - 55"	55" - 65"	65" - 75"	43" - 55"	50" - 65"	55" - 65"	65" - 75"	43" - 55"	50" - 65"	65" - 75"



*TV sizes refer to the standard diagonal screen dimension that TV manufacturers state when describing the size of their products. If sizing your existing flat screen TV, measure diagonally from the top left of the screen to the bottom right to find the TV's advertised size. We also recommend measuring the width and height of your TV to ensure adequate proportions that align with your desired electric fireplace model and size.




Features & Accessories •

FEATURES AND ACCESSORIES



ACCESSORIES		STUDIO	SKOPE	ONYX
Fireplace Type	Single-Sided	✓	•	•
	Single-Sided or Multi-Sided	•	✓	✓
Sizes		41" / 53" / 65"	43" / 53" / 59" / 77"	43" / 59" / 75"
Glass Viewing Area Height		13"	15"	17"
Depth		7.75"	11"	13.25"
Remote Control		✓	✓	✓
App Control		•	✓	✓
Flame Colours	3 Colours	✓	✓	•
	Fully Adjustable Multi-Colour	•	•	✓
	Dual Flame Option	•	•	✓
	Adjustable Brightness	✓	✓	✓
Flame Speed	Fixed Speed	✓	✓	•
	Fully Adjustable	•	•	✓
Down-Lighting	Multi-Colour	•	✓	✓
	Adjustable Brightness	•	✓	✓
Fuel Bed	Static Effect	✓	•	•
	Dynamic Effect	•	✓	✓
	Logs + Ember Media	✓	✓	✓
	Crystal Ice Media	•	✓	•
	Hidden Log Lighting System	•	•	✓
	Adjustable Brightness	✓	✓	✓
Birch Fuel Effect		★	★	★
Fan Kit		✓	✓	✓
Finishing Trim		✓	✓	✓
Mood Lighting Kit		★	★	★
Wall Mounting Bracket		•	✓	✓

- Not available
- ✓ Standard
- ★ Optional


SPECIFICATIONS – Ei25 ELECTRIC INSERT



3-Sided Faceplate



4-Sided Faceplate




FACEPLATE	DIMENSIONS			
	A - WIDTH	B - HEIGHT	C - DEPTH	D - BOTTOM HEIGHT
3-Sided Finishing Trim*	27-1/16"	17-7/8"	1/8"	--
4-Sided Finishing Trim**	27-1/16"	18-13/16"	1/8"	13/16"
3-Sided Flush Faceplate	35-13/16"	23-1/4"	1/16"	--
4-Sided Flush Faceplate	35-13/16"	26"	1/16"	4-7/16"
3-Sided Flush Faceplate with Premium Surround	36-3/16"	23-7/8"	1-11/16"	--
3-Sided Flush Faceplate with Traditional Surround	38-9/16"	28-13/16"	2-1/4"	--
3-Sided Custom Faceplate	29-1/16" – 56-7/8"	18-7/8" – 44-7/8"	1/16"	--
4-Sided Custom Faceplate	29-1/16" – 69"	20-13/16" – 45"	1/16"	1-13/16" min
Oversized Backing Plate	44-11/16"	29-5/8"	1/16"	--

* Bottom trim from 4-sided finishing trim is removed to create a 3-sided

** Included with appliance


FRAMING INSTALLATION

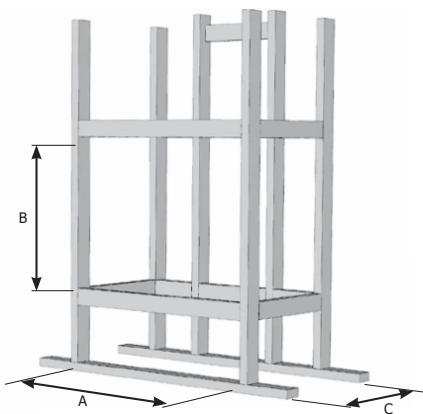

WOOD FRAMING


A	B	C
25-5/8"	17-11/16"	11-7/8"

SPECIFICATIONS – Ei25 ELECTRIC INSERT


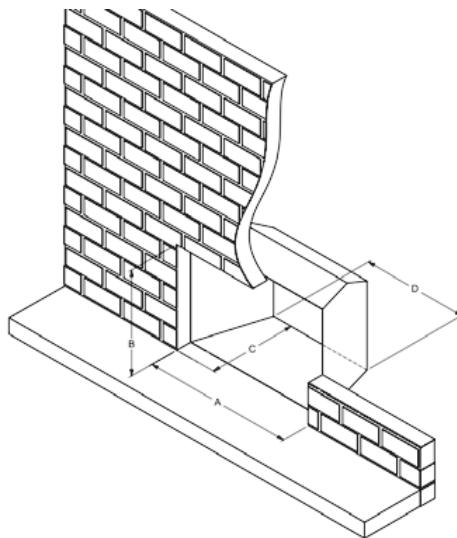


FACEPLATE	DIMENSIONS			
	A - MIN. INSTALL WIDTH	B - MIN. INSTALL HEIGHT	C - MIN. INSTALL DEPTH	D - MIN. REAR WIDTH
3-Sided Finishing Trim	25-5/8"	17-11/16"	11-7/8"	19"
4-Sided Finishing Trim	25-5/8"	17-11/16"	11-7/8"	19"
3-Sided Flush Faceplate	25-3/4"	17-11/16"	11-13/16"	19"
4-Sided Flush Faceplate	25-3/4"	17-13/16"	11-13/16"	19"
3-Sided Flush Faceplate with Premium Surround	24-13/16"	17-11/16"	10-7/16"	19"
3-Sided Flush Faceplate with Traditional Surround	24-3/8"	17-11/16"	9-3/4"	19"
3-Sided Custom Faceplate	25-3/4"	17-11/16"	11-13/16"	19"
4-Sided Custom Faceplate	25-3/4"	17-13/16"	11-13/16"	19"
3-Sided Flush Faceplate with Backing Plate	25-11/16"	17-11/16"	11-13/16"	19"
3-Sided Finishing Trim with Backing Plate	25-11/16"	17-11/16"	11-13/16"	19"
3-Sided Flush Faceplate with Premium Surround and Backing Plate	25-11/16"	17-11/16"	10-3/8"	19"
3-Sided Flush Faceplate with Traditional Surround and Backing Plate	25-11/16"	17-11/16"	9-11/16"	19"


SPECIFICATIONS – Ei29/Ei29LCD ELECTRIC INSERT



3-Sided Faceplate



4-Sided Faceplate




FACEPLATE	DIMENSIONS			
	A - WIDTH	B - HEIGHT	C - DEPTH	D - BOTTOM HEIGHT
3-Sided Finishing Trim*	31-1/16"	20-7/8"	1/8"	--
4-Sided Finishing Trim**	31-1/16"	21-13/16"	1/8"	13/16"
3-Sided Flush Faceplate	40-3/16"	26"	1/16"	--
4-Sided Flush Faceplate	40-3/16"	29-1/2"	1/16"	4-3/4"
3-Sided Flush Faceplate with Premium Surround	40-13/16"	26-3/8"	1-11/16"	--
3-Sided Flush Faceplate with Traditional Surround	45-3/4"	28-3/4"	2-1/4"	--
3-Sided Custom Faceplate	33-1/16" – 56-7/8"	21-7/8" – 44-7/8"	1/16"	--
4-Sided Custom Faceplate	33-1/16" – 69"	23-13/16" – 45"	1/16"	1-7/8" min
Oversized Backing Plate	47-1/2"	31-1/2"	1/16"	--

* Bottom trim from 4-sided finishing trim is removed to create a 3-sided

** Included with appliance

FRAMING INSTALLATION

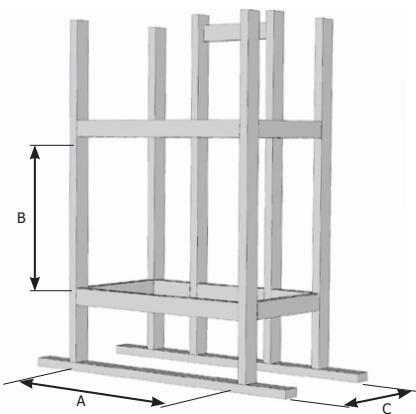


WOOD FRAMING

A	B	C
29-3/4"	20-9/16"	12-5/8"


SPECIFICATIONS – Ei29/Ei29LCD ELECTRIC INSERT

MINIMUM FIREPLACE DIMENSIONS


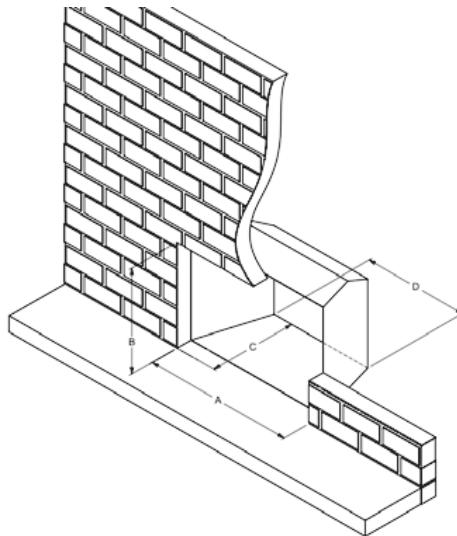


FACEPLATE	DIMENSIONS			
	A - MIN. INSTALL WIDTH	B - MIN. INSTALL HEIGHT	C - MIN. INSTALL DEPTH	D - MIN. REAR WIDTH
3-Sided Finishing Trim	29-5/8"	20-5/16"	11-13/16"	23-5/16"
4-Sided Finishing Trim	29-5/8"	20-5/16"	11-13/16"	23-5/16"
3-Sided Flush Faceplate	29-13/16"	20-9/16"	11-13/16"	23-5/16"
4-Sided Flush Faceplate	29-13/16"	20-13/16"	11-13/16"	23-5/16"
3-Sided Flush Faceplate with Premium Surround	29"	20-3/16"	10-7/16"	23-5/16"
3-Sided Flush Faceplate with Traditional Surround	28-7/16"	20-1/8"	9-3/4"	23-5/16"
3-Sided Custom Faceplate	29-13/16"	20-9/16"	11-13/16"	23-5/16"
4-Sided Custom Faceplate	29-13/16"	20-13/16"	11-13/16"	23-5/16"
3-Sided Flush Faceplate with Backing Plate	30-5/8"	20-3/4"	11-13/16"	23-5/16"
3-Sided Finishing Trim with Backing Plate	30-5/8"	20-3/4"	11-13/16"	23-5/16"
3-Sided Flush Faceplate with Premium Surround and Backing Plate	30-5/8"	20-3/4"	10-3/8"	23-5/16"
3-Sided Flush Faceplate with Traditional Surround and Backing Plate	30-5/8"	20-3/4"	9-11/16"	23-5/16"


SPECIFICATIONS – Ei33/Ei33LCD ELECTRIC INSERT



3-Sided Faceplate



4-Sided Faceplate




FACEPLATE	DIMENSIONS			
	A - WIDTH	B - HEIGHT	C - DEPTH	D - BOTTOM HEIGHT
3-Sided Finishing Trim*	35-1/16"	24-7/8"	1/8"	--
4-Sided Finishing Trim**	35-1/16"	25-13/16"	1/8"	13/16"
3-Sided Flush Faceplate	46-1/8"	30-13/16"	1/16"	--
4-Sided Flush Faceplate	46-1/8"	37-1/16"	1/16"	6-1/2"
3-Sided Flush Faceplate with Premium Surround	46-3/4"	31-3/16"	1-11/16"	--
3-Sided Flush Faceplate with Traditional Surround	51-11/16"	33-9/16"	2-1/4"	--
3-Sided Custom Faceplate	37-1/16" – 56-7/8"	25-7/8" – 44-7/8"	1/16"	--
4-Sided Custom Faceplate	37-1/16" – 69"	27-13/16" – 45"	1/16"	1-13/16" min
Oversized Backing Plate	50-1/4"	33"	1/16"	--

* Bottom trim from 4-sided finishing trim is removed to create a 3-sided

** Included with appliance

FRAMING INSTALLATION

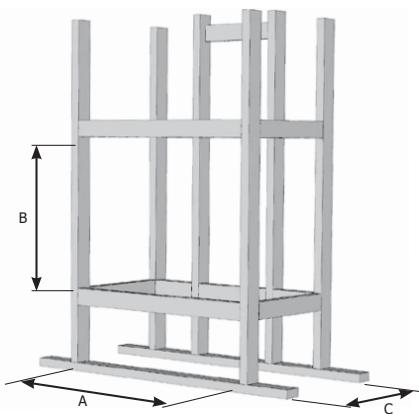


WOOD FRAMING

A	B	C
33-5/8"	24-11/16"	13-1/4"


SPECIFICATIONS – Ei33/Ei33LCD ELECTRIC INSERT

MINIMUM FIREPLACE DIMENSIONS

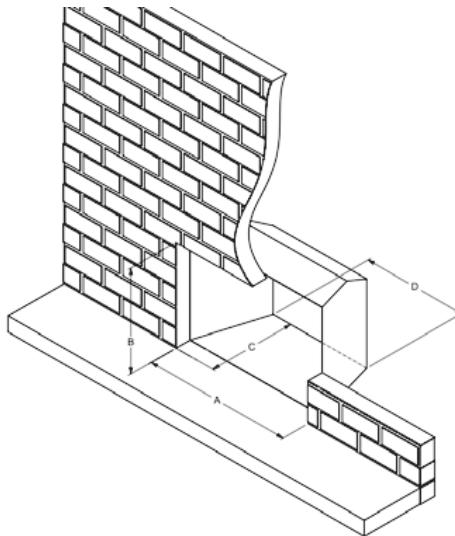


FACEPLATE	DIMENSIONS			
	A - MIN. INSTALL WIDTH	B - MIN. INSTALL HEIGHT	C - MIN. INSTALL DEPTH	D - MIN. REAR WIDTH
3-Sided Finishing Trim	33-5/8"	24-11/16"	13-1/4"	26-1/4"
4-Sided Finishing Trim	33-5/8"	24-11/16"	13-1/4"	26-1/4"
3-Sided Flush Faceplate	33-1/4"	24-11/16"	13-3/16"	26-1/4"
4-Sided Flush Faceplate	33-3/4"	24-13/16"	13-3/16"	26-1/4"
3-Sided Flush Faceplate with Premium Surround	32-13/16"	24-11/16"	11-13/16"	26-1/4"
3-Sided Flush Faceplate with Traditional Surround	32-2/8"	24-11/16"	11-1/8"	26-1/4"
3-Sided Custom Faceplate	33-1/4"	24-11/16"	13-3/16"	26-1/4"
4-Sided Custom Faceplate	33-1/4"	24-13/16"	13-3/16"	26-1/4"
3-Sided Flush Faceplate with Backing Plate	34-3/16"	24-11/16"	13-1/8"	26-1/4"
3-Sided Finishing Trim with Backing Plate	34-3/16"	24-11/16"	13-3/16"	26-1/4"
3-Sided Flush Faceplate with Premium Surround and Backing Plate	32-13/16"	24-11/16"	11-3/4"	26-1/4"
3-Sided Flush Faceplate with Traditional Surround and Backing Plate	34-3/16"	24-11/16"	11-1/16"	26-1/4"

SPECIFICATIONS – STUDIO UNITS

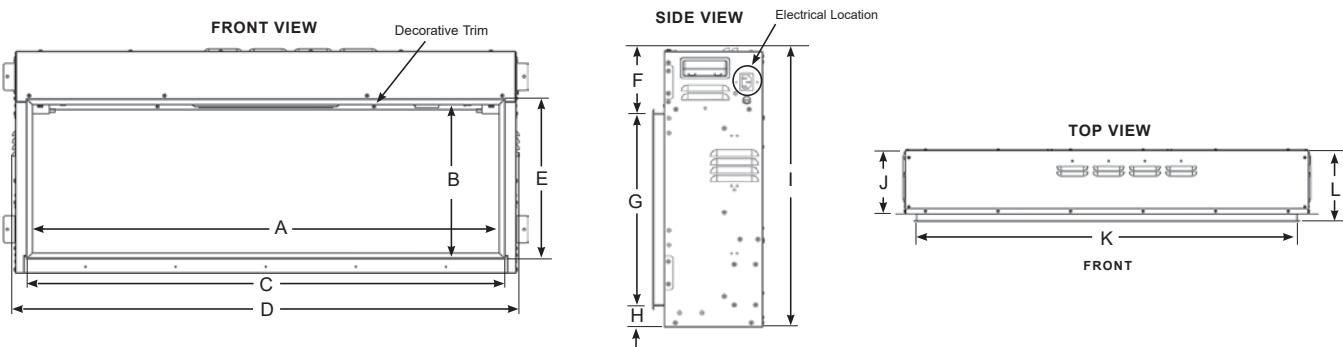

UNIT	A	B	C	D	E	F	G	H	I	J	K	L
ES105	40-3/4"	13"	41-7/8"	44-1/4"	14-1/8"	4-7/16"	13-9/16"	1-1/2"	19-7/16"	6-7/8"	41-5/16"	7-3/4"
ES135	52-5/8"	13"	53-11/16"	56-1/16"	14-1/8"	4-7/16"	13-9/16"	1-1/2"	19-7/16"	6-7/8"	53-3/16"	7-3/4"
ES165	62"	13"	63-1/16"	65-7/16"	14-1/8"	4-7/16"	13-9/16"	1-1/2"	19-7/16"	6-7/8"	62-1/2"	7-3/4"


FRAMING INSTALLATION

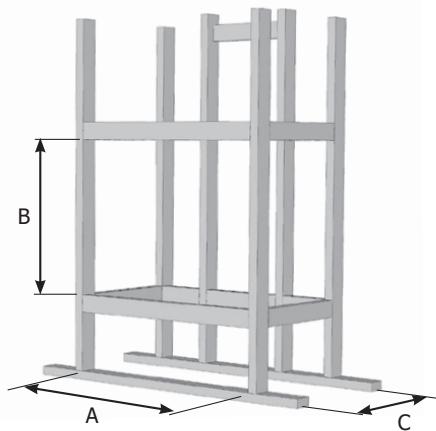

UNIT	A	B	C
ES105	44-15/16"	20-1/2"	7-5/8"
ES135	56-3/4"	20-1/2"	7-5/8"
ES165	66-1/8"	20-1/2"	7-5/8"

NOTE: Framing may be constructed of combustible material (i.e. 2 x 4/2 x 6) and does not require steel studs. The appliance must be installed on a flat, solid, continuous surface (e.g. wood, metal, concrete) which must be the full width and depth of appliance. This may be the floor, or raised up on a platform to enhance its visual impact. Measurement (B) does not include height of platform base if raised off the ground. Example 1/2" thick platform base = 21" framing height.

SPECIFICATIONS – SKOPE & ONYX UNITS

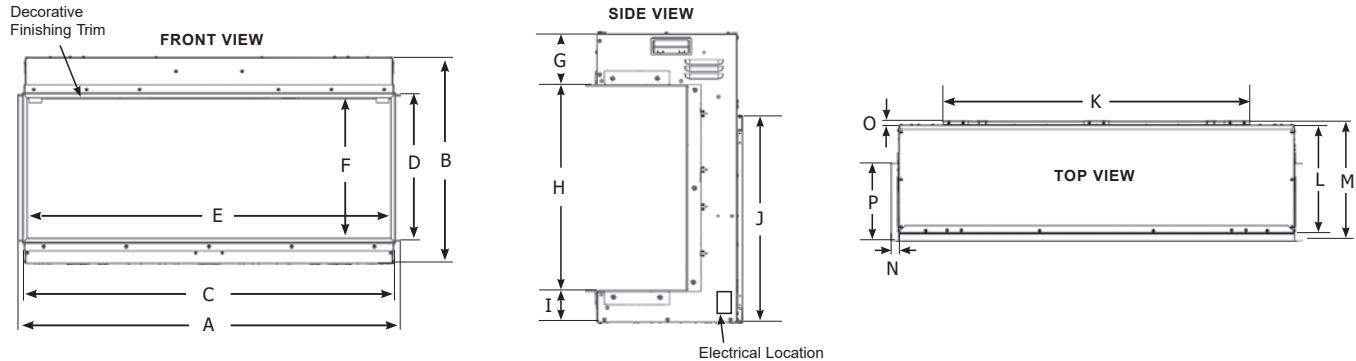

SKOPE UNITS

UNIT	A	B	C	D	E	F	G	H	I	J*	K*	L	M	N	O	P
E110	44-5/8"	22-3/4"	44-1/4"	16-1/16"	43-1/2"	14-15/16"	4-3/8"	15-11/16"	2-5/8"	17-1/2"	33-15/16"	9-15/16"	10-11/16"	7/8"	1/2"	8-11/16"
E135	54-7/16"	22-3/4"	54-1/16"	16-1/16"	53-3/8"	14-15/16"	4-3/8"	15-11/16"	2-5/8"	17-1/2"	33-15/16"	9-15/16"	10-11/16"	7/8"	1/2"	8-11/16"
E150	60-3/8"	22-3/4"	59-15/16"	16-1/16"	59-1/4"	14-15/16"	4-3/8"	15-11/16"	2-5/8"	17-1/2"	50-1/2"	9-15/16"	10-11/16"	7/8"	1/2"	8-11/16"
E195	78-1/16"	22-3/4"	77-11/16"	16-1/16"	77"	14-15/16"	4-3/8"	15-11/16"	2-5/8"	17-1/2"	69-3/8"	9-15/16"	10-11/16"	7/8"	1/2"	8-11/16"

*Wall Mounting Bracket


ONYX UNITS

UNIT	A	B	C	D	E	F	G	H	I	J*	K*	L	M	N	O	P
EX110	45-7/16"	24-3/4"	44"	17-7/16"	43-5/16"	16-3/4"	4-3/8"	17-3/8"	2-5/8"	17-1/2"	33-15/16"	11-13-16"	13-1/4"	7/8"	1/2"	8-11/16"
EX150	61-3/16"	24-3/4"	59-3/4"	17-7/16"	59-1/16"	16-3/4"	4-3/8"	17-3/8"	2-5/8"	17-1/2"	50-9/16"	11-13-16"	13-1/4"	7/8"	1/2"	8-11/16"
EX190	78-15/16"	24-3/4"	77-1/2"	17-7/16"	76-3/4"	16-3/4"	4-3/8"	17-3/8"	2-5/8"	17-1/2"	69-7/16"	11-13-16"	13-1/4"	7/8"	1/2"	8-11/16"

*Wall Mounting Bracket

SPECIFICATIONS – E800LCD


FRAMING INSTALLATION E800LCD

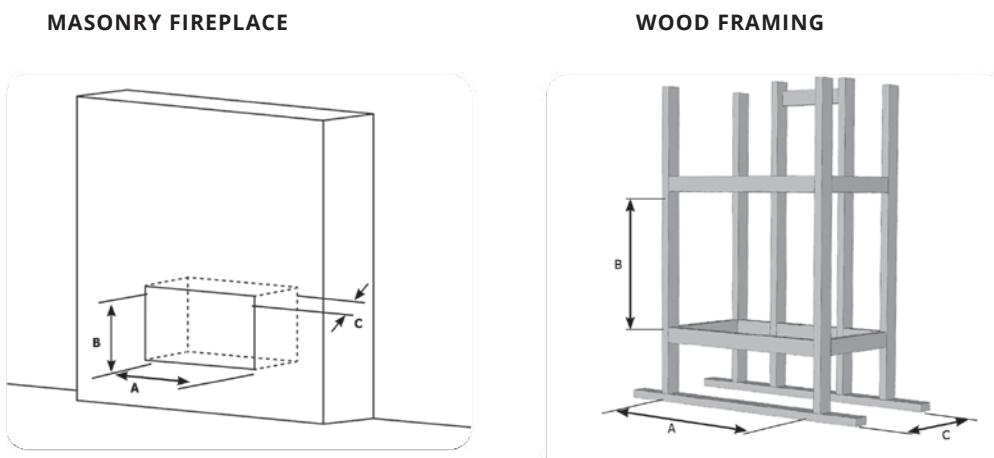

MINIMUM OPENING SIZE			
Dimensions	A	B	C
	34-11/16" (881mm)	33-15/16" (862mm)	12-3/4" (324mm)

NOTE: See minimum fireplace opening sizes with 3-sided and 4-sided finishing trim options.

FRAMING INSTALLATION Ei36LCD

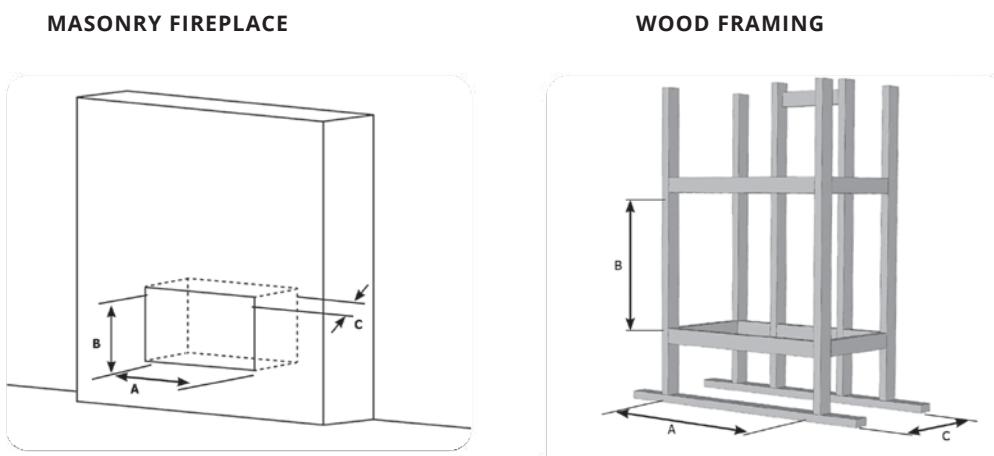


MINIMUM OPENING SIZE			
Dimensions	A	B	C
	34-11/16" (881mm)	33-15/16" (862mm)	12-3/4" (324mm)

NOTE: See minimum fireplace opening sizes with 3-sided and 4-sided finishing trim options.

SPECIFICATIONS – SKOPE & ONYX UNITS

FRAMING INSTALLATION

SINGLE SIDED



SKOPE UNITS

SINGLE-SIDED	A	B	C
E110	45-1/16"	23-1/4"	10-7/16"
E135	54-15/16"	23-1/4"	10-7/16"
E150	60-13/16"	23-1/4"	10-7/16"
E195	78-9/16"	23-1/4"	10-7/16"

NOTE: Framing may be constructed of combustible material (ie: 2 x 4/2 x 6) and does not require steel studs.


ONYX UNITS

SINGLE-SIDED	A	B	C
EX110	44-13/16"	25-1/4"	12-7/16"
EX150	60-9/16"	25-1/4"	12-7/16"
EX190	78-1/4"	25-1/4"	12-7/16"


NOTE: Framing may be constructed of combustible material (ie: 2 x 4/2 x 6) and does not require steel studs.

2-SIDED (LEFT/RIGHT) + 3-SIDED VIEW INSTALLATION


2-SIDED LEFT OR RIGHT



3-SIDED



2-SIDED OR 3-SIDED



SKOPE UNITS

2-SIDED	A	B	C
E110	44-11/16"	23-1/4"	10-7/16"
E135	54-9/16"	23-1/4"	10-7/16"
E150	60-7/16"	23-1/4"	10-7/16"
E195	78-3/16"	23-1/4"	10-7/16"

3-SIDED	A	B	C
E110	44-13/16"	23-1/4"	10-7/16"
E135	54-5/8"	23-1/4"	10-7/16"
E150	60-1/2"	23-1/4"	10-7/16"
E195	78-1/4"	23-1/4"	10-7/16"

NOTE: The appliance must be installed on a flat, solid, continuous surface (e.g. wood, metal, concrete) which must be the full width and depth of appliance. This may be the floor, or raised up on a platform to enhance its visual impact. Measurement (B) does not include height of platform base if raised off the ground. Example 1/2" thick platform base = 23-3/4" framing height.

ONYX UNITS

2-SIDED	A	B	C
EX110	44-7/16"	25-1/4"	12-7/16"
EX150	60-3/16"	25-1/4"	12-7/16"
EX190	77-7/8"	25-1/4"	12-7/16"

3-SIDED	A	B	C
EX110	44-1/2"	25-1/4"	12-7/16"
EX150	60-1/4"	25-1/4"	12-7/16"
EX190	77-15/16"	25-1/4"	12-7/16"

NOTE: The appliance must be installed on a flat, solid, continuous surface (e.g. wood, metal, concrete) which must be the full width and depth of appliance. This may be the floor, or raised up on a platform to enhance its visual impact. Measurement (B) does not include height of platform base if raised off the ground. Example 1/2" thick platform base = 25-3/4" framing height.

DISCLAIMER: Please refer to the manual for the latest up to date installation details.



Find More Products at **REGENCY-FIRE.COM**

Your Regency Dealer

©2025 FPI Fireplace Products International Ltd. Regency® is registered trademark of FPI Fireplace Products International Ltd. All rights reserved.

Printed in Canada (09/25) Part no. 944-448

Version No: 2025-2



PELLET INSERTS & STOVES



regency-fire.com

WHY CHOOSE REGENCY?

At Regency, our past 40 years have been focused on providing a high-level of service while building high-quality and reliable products that our customers can enjoy for years to come.

HIGH-QUALITY

Producing a high-quality product has been at the very heart of what we do from when that very first stove rolled off the production line over 40 years ago to today. We are ever-focused on producing quality products for our customers that will last for years to come.

BEST WARRANTY

A fireplace should be reliable and should work right the first time it is used, and the 1,000th. A core part of our business is making sure that we are building long-lasting, durable, high-quality products; we back-up that commitment with the industry's best warranty on all our products.

COST-EFFICIENT

Never before have home heating costs been higher. Turn your furnace way down and zone heat with our beautiful, reliable and convenient Regency products. Not only can you cut your fuel bills in half, but you'll be able to enjoy the timeless comfort of a Regency fire.

Why Regency? Because it's **more** than a fireplace!



TABLE OF CONTENTS

Regency Hampton®	
GCi60 & GC60	04
Regency Greenfire™	
GFi55 & GF55	06
Regency Greenfire™	
GF40	08
Specifications	09



REGENCY HAMPTON® GCi60 & GC60

Biomass Pellet Insert & Stove



Hampton GCi60 biomass pellet insert shown with ceramic log set.

COST-EFFICIENT HEATING

Our Hampton biomass pellet collection beautifully combines the best features of traditional cast iron with the latest developments in alternative fuel technology. Designed to burn wood, corn, wheat, and barley pellets, these models offer very cost-effective home heating. Supported by a patent-pending low maintenance burner, the Hampton GCi60 and GC60 require less cleaning & provides a high heat output.

SPECIFICATIONS	GCi60	GC60
BTU input (on high)*	55,000	55,000
BTU input (on low)*	10,000	10,000
Emissions (grams/hour)	1.82 g/hr	1.82 g/hr
Fuel capacity (hopper size)	60 lbs	60 lbs
Burn time (typical)	up to 36 hrs.	up to 36 hrs.
Room size / Area heated**	up to 2,500 sq. ft.	up to 2,500 sq. ft.
Weight	500 lbs	504 lbs
Max. power usage (ignitor on)	504 Watts	504 Watts
Operating power usage	200 Watts	200 Watts
Vent size	4"	4"
Viewing area	232 sq. in.	232 sq. in.

MINIMUM FIREPLACE OPENING (GCi60 ONLY)

Width (front)	27"
Height	23"
Depth	16"

* Figure will vary with individual conditions and fuel quality.

** Figure will vary with floor plan, house layout / heat loss of the house and quality of pellets used.



Hampton GC60 biomass pellet stove shown with ceramic log set.

STANDARD FEATURES

- Ability to burn a variety of biomass pellet fuels: high grade to low-grade wood, corn, wheat, and barley
- Durable cast-iron exterior provides beautiful, radiant heat
- Fluted cast-iron liner
- Low maintenance burner with agitator rod in the burn pot
- Reduced cleaning intervals compared to other pellet stoves
- Quick start automatic (400 watts) ignitor with air pump
- 300 CFM convection variable speed blower
- Standard wall thermostat
- Concealed, easy-to-use controls with Tri-mode operating system (Manual – Hi/Lo – Auto/Off)
- Advanced air wash system for cleaner glass
- Mobile home approved (GC60 only)
- Large concealed ash drawer

OPTIONS

- Ceramic one piece log set
- Oversize filler panel (GCi60 only)
- Service rail kit (GCi60 only)
- High efficiency adaptor (GC60 only)



Note: Qualifies for U.S. Biomass Tax Credit when installed in accordance to the manual.

REGENCY GREENFIRE™ GFi55 & GF55

Wood Pellet Insert & Stove



Greenfire GFi55 pellet insert with antique copper door overlay and ceramic log set.

RELIABLE PELLET TECHNOLOGY

Regency Greenfire pellet stoves and home heater inserts are quiet, reliable, and built to last. The large wrap-around style glass viewing area provides a maximum view of the fire from all over the room. Designed to operate automatically with a standard ignitor, the GFi55 and GF55 invite you to control the comfort of your home with a simple push of a button.

SPECIFICATIONS	GFi55	GF55
BTU input (on high)*	45,000	45,000
BTU input (on low)*	12,000	12,000
Emissions (grams/hour)	0.89 g/hr	0.89 g/hr
Fuel capacity (hopper size)	55 lbs	55 lbs
Burn time (typical)	up to 36 hrs.	up to 36 hrs.
Room size / Area heated**	up to 2,000 sq. ft.	up to 2,000 sq. ft.
Weight	238 lbs	292 lbs
Max. power usage (ignitor on)	520 Watts	520 Watts
Operating power usage	200 Watts	200 Watts
Vent size	3"	3"
Viewing area	161 sq. in.	161 sq. in.

MINIMUM FIREPLACE OPENING (GFi55 ONLY)

Width (front)	26"
Height	19-1/2" - 22-3/4"
Depth	15"

* Figure will vary with individual conditions and fuel quality.

** Figure will vary with floor plan, house layout / heat loss of the house and quality of pellets used.



Greenfire GF55 pellet stove shown with brushed nickel door overlay and ceramic log set.

STANDARD FEATURES

- Large arched bay door
- Black door overlay
- Steel fluted liner panels
- Hidden door handle
- Decorative black grilles
- Heavy-duty heat exchanger
- Large full pedestal ash drawer (GF55 only)
- Large concealed ash drawer (GFi55 only)
- Large 55 lb hopper with easy access lid and recessed handle
- Adjustable hopper height (GFi55 only) from 22.75" to 19.5"
- 160 CFM convection variable speed blower
- Concealed, easy-to-use controls with Tri-mode operating system (Manual – Hi/Lo – Auto/Off)
- Quick start ignitor (300 Watts)
- Mobile home approved (GF55 only)

OPTIONS

- Antique copper door overlay
- Brushed nickel door overlay
- Ceramic one piece log set
- Regular or oversize faceplate (GFi55 only)
- High efficiency adaptor



Note: Qualifies for U.S. Biomass Tax Credit when installed in accordance to the manual.

REGENCY GREENFIRE™ GF40

Wood Pellet Stove



Greenfire GF40 shown with hearth pad.

MODERN, COMPACT DESIGN

The GF40 small freestanding pellet stove features a modern, compact design that heats your room evenly and quickly. Put up your feet and enjoy the warmth, while the quick start automatic ignitor and large, multi-tube heat exchanger do all the work.

SPECIFICATIONS	GF40
BTU input (on high)*	30,000
BTU input (on low)*	8,000
Emissions (grams/hour)	0.48 g/hr
Fuel capacity (hopper size)	up to 67 lbs
Burn time (typical)	up to 36 hrs.
Room size / Area heated**	up to 1,200 sq. ft.
Weight	230 lbs
Max. power usage (ignitor on)	475 Watts
Operating power usage	215 Watts
Vent size	3"
Viewing area	124 sq. in.

STANDARD FEATURES

- Ability to burn a variety of pellet fuels - high grade to low grade wood pellets
- Low maintenance burner and easy to clean burn pot
- Concealed, easy-to-use controls with Tri-mode operating system (Manual - Hi/Lo - Auto/Off)
- Large multi-tube heat exchanger
- 130 CFM convection variable speed blower
- Mobile home approved
- Quick start automatic (400 watt) ignitor
- Large concealed ash drawer
- Standard matching hearth pad
- High efficiency adaptor (optional)




* Figure will vary with individual conditions and fuel quality.

** Figure will vary with floor plan, house layout / heat loss of the house and quality of pellets used.

Note: Qualifies for U.S. Biomass Tax Credit when installed in accordance to the manual.

SPECIFICATIONS - GF40 WOOD PELLET STOVE

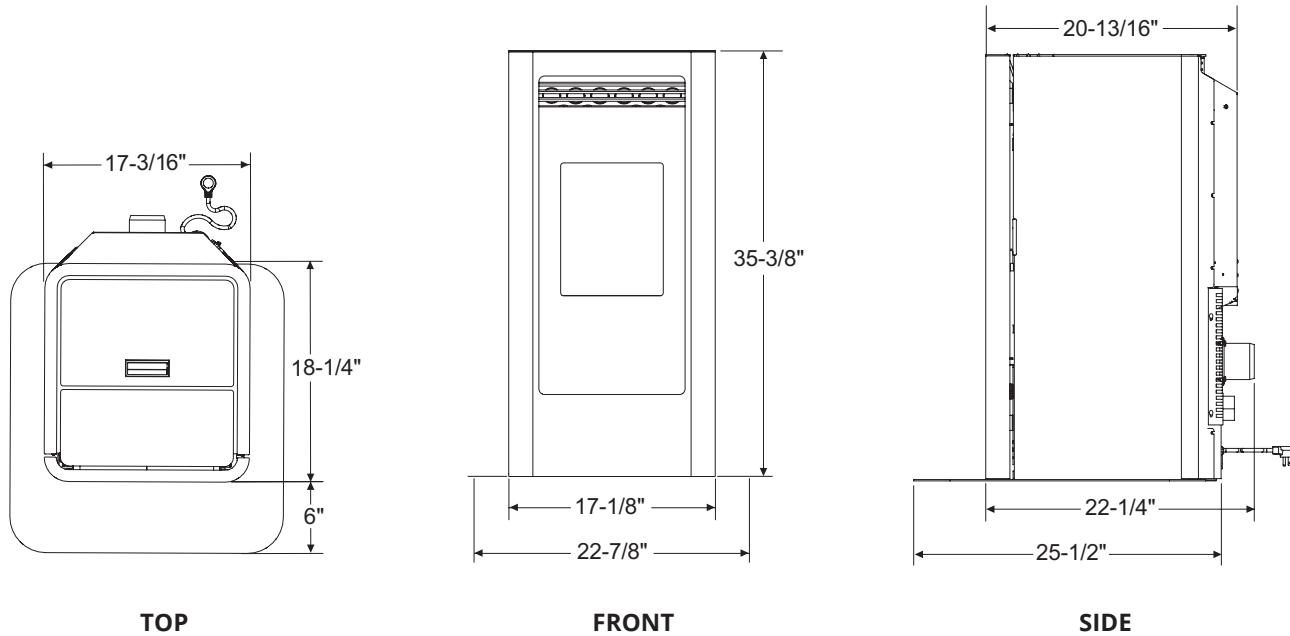


TOP


FRONT

SIDE

CLEARANCES

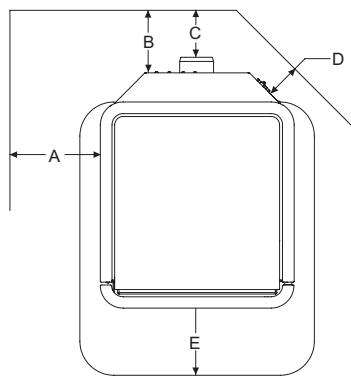

MIN. ALCOVE CLEARANCES

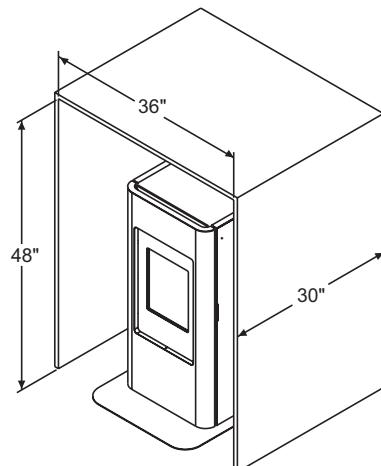


DIMENSIONS

A	Side wall to unit	8"
B	Back wall to unit	5-1/2"
C	Back wall to chimney connector	4"
D	Corner to unit	3"
E	Glass to hearth pad	6"


NOTE: Clearances are measured from the high efficiency adaptor, if installed. All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up to date information.

SPECIFICATIONS - GREENFIRE STOVE & INSERT


GF55 PELLET STOVE



TOP

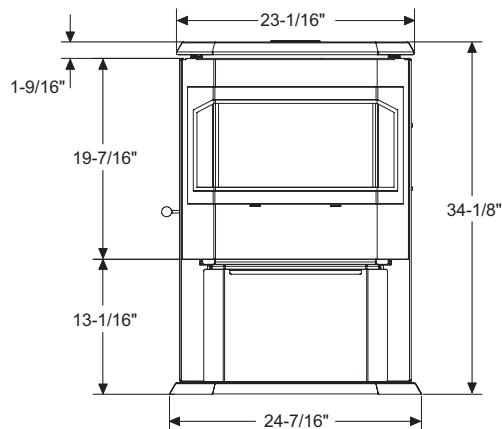


FRONT

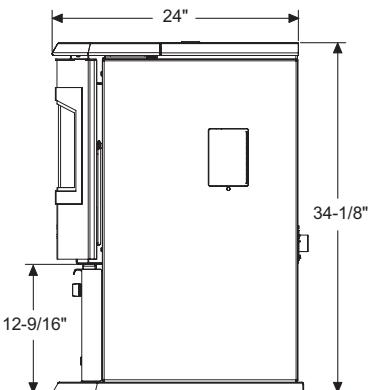


SIDE


GFI55 PELLET STOVE

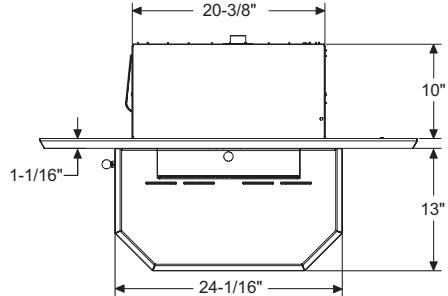

TOP

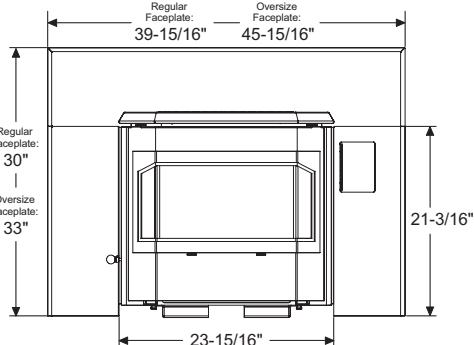


FRONT

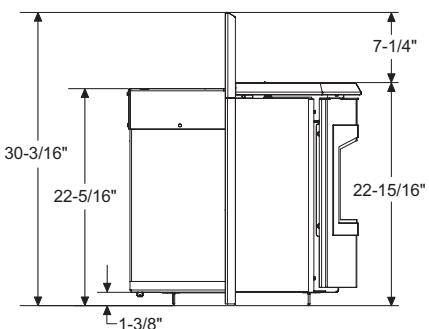


SIDE

CLEARANCES

GF55

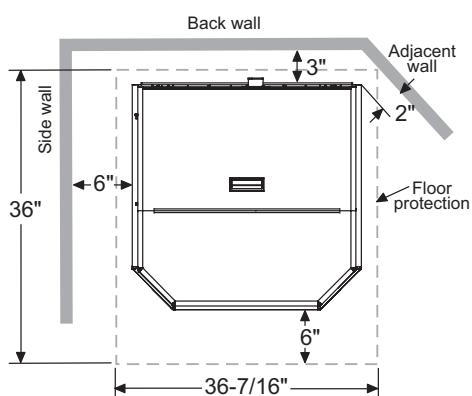

GFI55

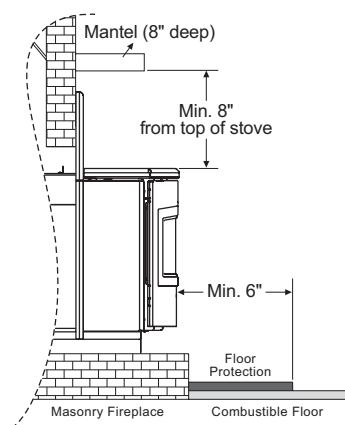


MIN. FIREPLACE OPENING

Height - 55 lbs hopper (standard)	22-3/4"
Height - 42 lbs hopper (adjusted)	19-1/2"
Width	26"
Depth	15"


NOTE: Clearances are measured from the high efficiency adaptor, if installed. All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up to date information.

SPECIFICATIONS - HAMPTON STOVE & INSERT

GC60 PELLET STOVE

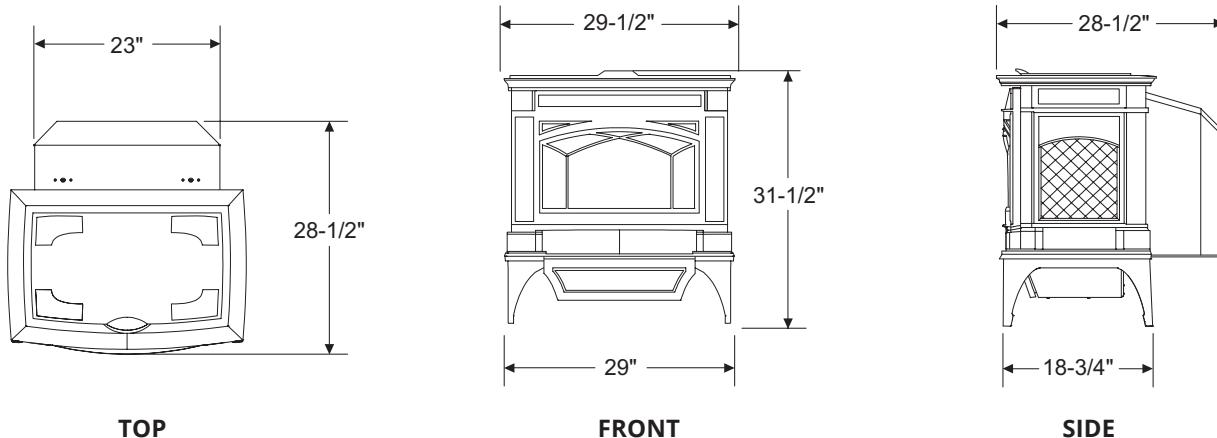


GCI60 PELLET INSERT

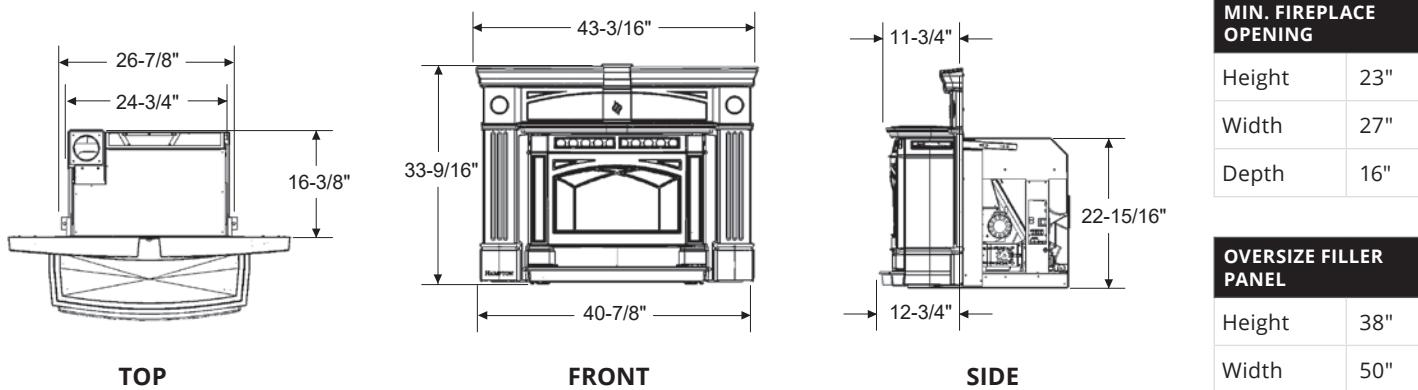


CLEARANCES

GCI60

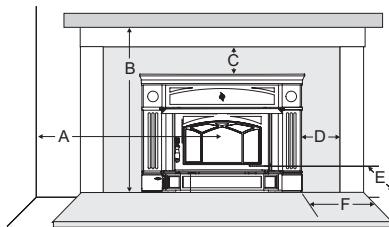

GC60

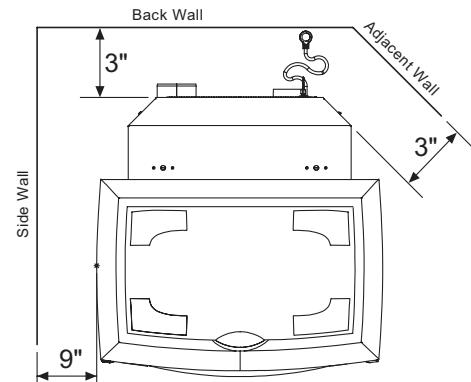

MASONRY & FACTORY BUILT FIREPLACE CLEARANCES

The minimum required clearances to combustible materials when installed into a masonry fireplace are:

Adjacent Side Wall (from center)	Mantel (12")	Top Facing (top faceplate)	Adjacent Side Wall (from faceplate)	Min. Hearth Extension (from door opening)	Min. Hearth Side Extension (from side of unit)
A	B	C	D	E	F
24"	33"	0"	2"	6"	6"

NOTE: Clearances are measured from the high efficiency adaptor, if installed. All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up to date information.

PELLET PRODUCT

A Green Choice

RENEWABLE ENERGY

Pellets are derived from renewable natural resources. Well-managed forests and crops offer a renewable, sustainable source of energy that helps reduce greenhouse gas emissions and help to reduce our dependency on fossil fuels.

PELLET BURNING IS CARBON NEUTRAL

As plants grow, they absorb carbon dioxide from the atmosphere. When plants die and decompose, the carbon stored in them is released into the atmosphere as carbon dioxide. Burning pellets is carbon neutral because burning pellets produce the same amount of carbon dioxide as they absorb during their life cycle.

EPA CERTIFIED

All Regency pellet stoves and inserts have been tested and certified to meet, and many times exceed, the EPA's 2020 guidelines for clean air emissions.



Find More Products at **REGENCY-FIRE.COM**

Your Regency Dealer

©2025 FPI Fireplace Products International Ltd. Greenfire™, Regency®, Hampton® are registered or proprietary trademarks of FPI Fireplace Products International Ltd. All rights reserved.

Printed in Canada (01/25) Part no. 944-407

Version No: 2025-1



Architect, Designer & Builder

INNOVATIVE FIREPLACE SOLUTIONS



regency-fire.com/professionals



G800EH shown with driftwood log set and volcanic black enamel panels



Why Choose Regency?

At Regency Fireplace Products, we understand that every project is unique, and every detail matters. That's why we have been the trusted choice for architects, builders, and designers for over 45 years.

Here's why you should choose Regency for your next construction or renovation project:

UNRIValed QUALITY

Our commitment to excellence in design, craftsmanship, and functionality ensures that our products stand the test of time, providing both beauty and performance.

INNOVATIVE TECHNOLOGY

We leverage cutting-edge technology to create fireplaces that not only enhance the aesthetics of a space but also offer unmatched efficiency and environmental sustainability.

DIVERSE RANGE OF OPTIONS

Whether your design calls for a dramatic wood-burning fireplace or a sleek, modern gas fireplace, we offer a wide range of styles and configurations to suit any project's needs.

EXCEPTIONAL CUSTOMER SUPPORT

Our dedicated team is here to assist you every step of the way, from product selection to installation and beyond. We pride ourselves on providing personalized service and expert guidance to ensure your project's success.

How We Help Professionals

At Regency, we understand the challenges that architects, builders, and designers face when specifying fireplace products for their projects. That's why we go above and beyond to support professionals like you in every aspect of your work:

STREAMLINED PROCESS

Our efficient ordering and delivery process ensures that projects stay on schedule, minimizing delays and maximizing productivity. We understand the importance of meeting deadlines and strive to make the process as smooth and seamless as possible.

EDUCATIONAL RESOURCES

Earn CEU credits with our variety of educational resources through our partnership with AEC (Architecture, Engineering, and Construction) Daily and the AIA (American Institute of Architects). We help the professional community grow their knowledge and expertise through our tailored seminars both online and through lunch and learning opportunities.

@AEC DAILY



TECHNICAL EXPERTISE

Our team of technical experts is available to provide support and guidance throughout the project lifecycle. Whether you need assistance with product specifications, installation instructions, or troubleshooting, we're here to help. Submit your plans for review for a quick turn-around time and helpful suggestions to ensure your project goes smoothly.

ARCHITECT AND SPECIFICATION LIBRARIES

We collaborate with leading design associations to provide seamless 3-part specifications and offer a robust library of BIM files, ensuring our products integrate effortlessly into design and construction workflows. By actively participating in trade and design shows, we stay connected with industry professionals and trends, making our product information readily accessible, accurate, and up to date.



bimobject



BIMsmith



ARCAT

INSIDE SALES TEAM

Our inside sales team is dedicated to helping professionals like you by reviewing plans and working closely with you to ensure that your fireplace specifications meet your project requirements. We understand the importance of getting every detail right and are committed to providing the support you need to achieve your vision.







G600C shown with coal black crushed glass and painted black steel panels installed with a clean front finish using the cool wall system and chase vent

Our Resources

At Regency, we believe in providing architects, builders, and designers with the resources they need to succeed. Explore our dedicated resources for professionals:

1 FOR BUILDERS

Visit our builder's portal to access product specifications, installation guides, and project galleries. Whether you're working on a residential development or a commercial project, we have the tools and resources you need to bring your vision to life.

2 FOR DESIGNERS

Discover inspiration and tools tailored for designers, including design trends, case studies, and visual resources. Whether you're designing a luxury home or a boutique hotel, we have the resources you need to create breathtaking spaces. Contact us if you are interested in becoming a part of our Designer Showcase.

3 FOR ARCHITECTS

Access comprehensive resources for architects, including CAD drawings, technical data, and design specifications. Whether you're designing a new building or renovating an existing space, our resources can help you bring your vision to life.

4 DIGITAL TOOLKIT

Explore our digital toolkit, featuring high-quality images, brochures, and videos to enhance your presentations and proposals. Our digital toolkit makes it easy to use Regency Products to inspire your clients.

5 BIM FILES

Simplify your design process with our BIM files, providing accurate 3D models and data for seamless integration into your projects. Our BIM files save you time and effort, allowing you to focus on what you do best – creating stunning spaces. Files are available on our website or directly in leading BIM libraries for your software.

Explore all our Resources : regency-fire.com/professionals



Commercial Use

Our products are ideal for commercial applications, offering unparalleled design flexibility. With advanced technologies like our patented Cool Wall System™ and Power Venting, you can unleash your creativity and craft unique, statement-making finishes. Plus, our systems accommodate long vent runs, making it easy to exhaust outside of large buildings.

City Series Gas Fireplaces and our Grandview G1200 offer the XL fireplace experience and the flexibility needed for commercial projects - particularly well suited for hotels, restaurants and condominium shared spaces.


Technologies

Flexible Venting Options


Regency's Power Vent systems have longer vertical and horizontal vents. Due to this functionality, designers and architects are able to craft applications with freedom and unparalleled flexibility.



Inline Power Vent system shown
vertical vent run

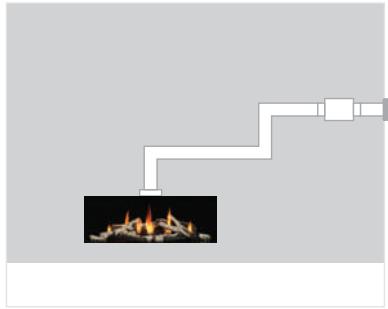

Inline Power Vent system shown
horizontal vent run

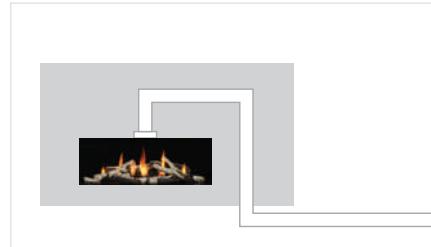

End of line flush horizontal Power Vent
system shown in a negative vent run

INLINE POWER VENT SYSTEM

- Allows for both vertical and horizontal termination (horizontal terminations can use Regency's AstroCap)
- Vent runs up to 72 ft. (rigid pipe approved for up to 72 ft. & flex pipe approved for up to 40 ft.)
- Use up to six 90° elbows or twelve 45° elbows
- Use flex vent or rigid pipe
- Access panel required for servicing inline Power Vent



Seattle See-Through 50

Cool Wall System™

Our patented Cool Wall System™ helps maintain the perfect wall surface temperature around the fireplace. The floating glass safety barrier draws in cool air which is split between the heat exchanger and the inside wall surface. Within the heat exchanger, the air is heated and then directed out the back of the fireplace.

Unlimited finishes. No limits. No restrictions.

Designed to maintain a cool wall to accommodate custom finishes right to the edge of your fireplace. Complete your fireplace aesthetic with:


- Wood
- Marble
- Glass
- Metal
- Tile
- Fabric
- Wallpaper
- Textured Panel
- Embossed Panel
- Faux Stone



3D Wall Panel



Herringbone Wood Panel

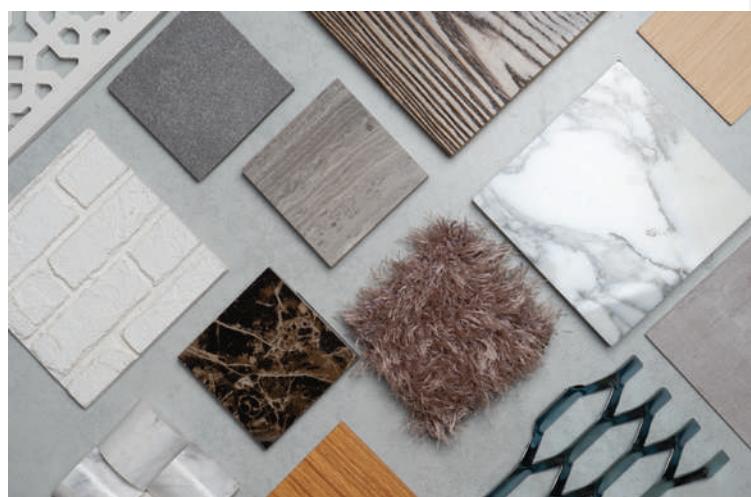

Controllable Warmth

FLEXIBLE VENTING OPTIONS

Regency's patented Cool Wall System™ releases heat at ceiling level which helps evenly distribute the airflow throughout the living space. Through this natural convection of air, excessive radiant heat is reduced enabling users to enjoy the utmost comfort and lounge in the warmth of beautiful flames more often.

- Enjoy the flexibility to choose from 3 different chase vent solutions
- Release warmth into the room discreetly



Front



Side(s)



Top


APP CONTROL

Put the power of flame directly in your hand. Our Proflame Connect Plus App allows precise regulation of the fireplace, turning it on/off, adjusting flame height, and setting temperature directly via smartphone. An optional Wi-Fi enabled module provides the ultimate fireplace control.



Heat Distribution Kit

Increase the effectiveness of your fireplace by dispersing warm air from the fireplace to remote locations in the same room or other rooms in your home by using the Heat Wave™ power duct system.

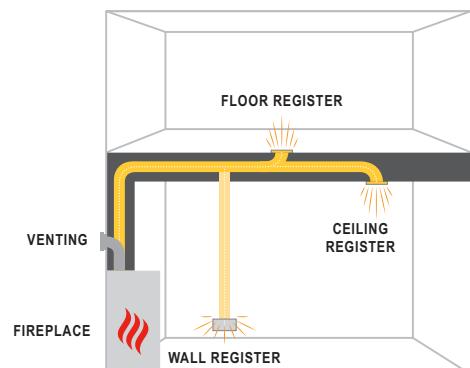



New York View 40 with birch logs and extended view panels

City Series


Linear Gas Fireplaces




NEW YORK VIEW
Single Sided




SEATTLE SEE-THROUGH
See-Through



SAN FRANCISCO BAY
Three Sided



CHICAGO CORNER
Corner Left or Right



SANTA MONICA PIER
Pier Left or Right

Features

Offering clean, uninterrupted viewing areas with stunning flame pictures, City Series creates an impactful statement in any room. Take your design to the edge with the freedom to finish with any material, right up to the firebox perimeter - from wood to wallpaper and everything in between!

Safely hang a TV or artwork directly above the fire and enjoy for hours with Cool Wall System's™ ductless heat dispersion which allows heat to be released at the ceiling and gradually warm the room.


- Clean uninterrupted view of the fire
- Dual-glass invisible safety barrier
- Standard interior lights to accentuate the fire
- Organic & contemporary firebed options
- TV & artwork friendly
- Maximum comfort with Cool Wall System's™ heat dispersion
- No noisy fans or expensive chase ducting required




Chicago Corner 60 with crystals

Grandview Gas Fireplaces


Traditional Gas Fireplaces



MEDIUM (G600)



LARGE (G800)



EXTRA LARGE
(G1200)



G800EH shown with driftwood log set and volcanic black enamel panels



G600EC shown with birch log set and reflective enamel inner panels



Features

Traditional fireplaces with modern technology. The Grandview series brings all the beauty and warmth of a traditional fireplace but offers all the benefits of modern technology. Finish in any material with optional Cool Wall System™ and hang TV's and artwork safely above the fireplace.

- Mix & match accessories for 100's of different looks
- Largest viewing area in its class
- Clean Front or Traditional Design
- Cool Wall System™ allows for any finishing material right to the edge of the fireplace
- TV & artwork friendly
- Rear or top vent for versatile installations




Onyx EX110 with a split oak log set, installed as a two-sided corner fireplace


Onyx Series

Premium Electric Fireplaces


The Onyx line delivers on a new definition of electric fire innovation. The finest crisp flame visuals appear to dance and soar between true-to-life log sets, dynamically lit from all angles for absolute immersion. But the Onyx is far more than an electric fire. Layer upon layer of visual technology weaves a palette of captivating lighting effects, which can be adjusted to transform any living space. The result? An ethereal experience tailored to every mood that will leave you in awe.



LINEAR
One Sided



CORNER
Two Sided



BAY
Three Sided

Features



- Elevate any living space with a luxurious 17" glass viewing height
- 1-Sided Linear, 2-Sided Corner, or 3-Sided Bay installation options
- Programmable app control on iOS and Android devices
- Life-like glowing ember bed with an artfully crafted oak log set & ember media (included)
- A 5,000 BTU electric heater paired with a blower to heat your home efficiently & sustainably
- Chromalight® Plus Designer LED System
- Thermostatic remote control (included) can be used to set a timer and adjust to your desired temperature



Onyx EX150 with a split oak log set, installed as a three-sided fireplace

Outdoor Gas Fireplaces

Design your own outdoor fireplace

Enjoy the drama of beautiful wide-angle flames or the cozy atmosphere of a traditional fire, but outdoors. Customizable burners, see-through linear models, and traditional design options offer versatile alternatives for elegant outdoor living spaces. Create flexible living and outdoor rooms to meet the unique needs of your customers with Regency's lineup of outdoor gas fireplaces.



G1200 shown with driftwood



HZO60 shown in single-sided application


Features

Enjoy all the benefits of the Grandview series with an outdoor conversion kit. Create stunning fire features with our collection of burners, or build see-through outdoor fireplaces with our linear range - the possibilities are endless. Build outdoor spaces your clients will love and extend patio season with our full range of outdoor products.




BURNERS

The Regency Plateau Outdoor Burner is as limitless as it is beautiful, with many design possibilities. This linear burner can be installed end to end & matched with our other burners to create various lengths: 30", 60", 80", or 100"



OUTDOOR FIREPLACES

Regency's outdoor fireplace extends living spaces and adds to the enjoyment of the patio. Choose from single sided or see-through models and the option of either clean edge installation or use of a decorative surround. Add a manufactured framing kit to make install a breeze.



GRANDVIEW OUTDOOR

Add the flexibility and beauty of the Grandview series to outdoor living spaces - featuring mix & match accessories, Cool Wall System™, & same TV-friendly clearances. Elevate your outdoor spaces with the Grandview series outdoors.

5 FULL SERVICE DISTRIBUTION CENTERS

1 CANADA-WEST

6988 Venture St.
Delta, BC V4G 1H4
Toll Free: (866) 946-5155

2 CANADA-EAST

425 Hanlon Creek Blvd. Guelph,
ON N1C 0A1
Toll Free: (800) 273-4362

3 NORTHWEST


20055 NE San Rafael St
Portland, OR 97230
Toll Free: (877) 503-2467

4 CENTRAL

1710 Afton Road
Sycamore, IL 60178
Toll Free: (888) 355-2501

5 EAST

2201B Lakeside Blvd.
Edgewood, MD 21040
Toll Free: (800) 569-4635

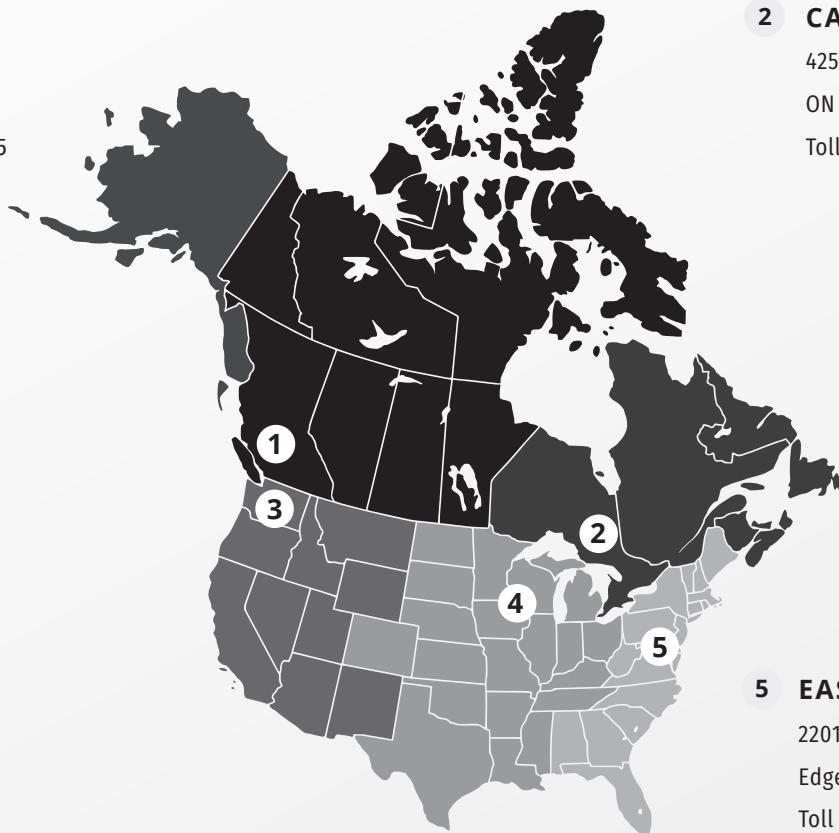

PROHELP@REGENCY-FIRE.COM

Ready when you need it! With over 2,000 dealers to serve you and 5 dedicated fulfillment centers throughout North America, we can get you the right products at the right time for your project. For inquiries and assistance, please contact our dedicated professionals at prohelp@regency-fire.com. Visit our website for more information: regency-fire.com/professionals

 **REGENCY**
regency-fire.com



**ESTATES CHIMNEY
& FIREPLACE, LLC**

**117 Buck Road Holland,
Pennsylvania 18966**

(267) 685-0530

info@estatesfireplace.com

www.estatesfireplace.com